


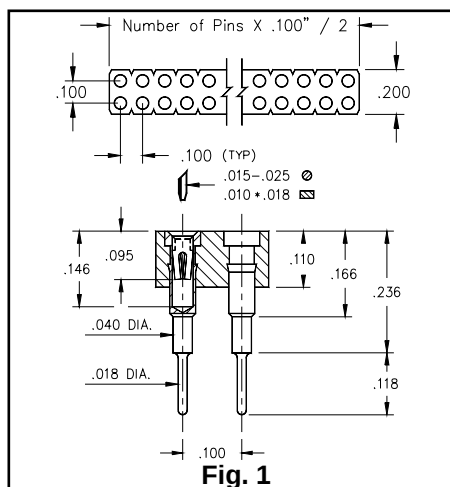

- Elevated sockets are available in 5 different standoff heights.
416...006 uses pin# 0153-1
416...003 uses pin# 0153-2
416...007 uses pin# 0153-3
416...008 uses pin# 0153-4
416...001 uses pin# 0153-5
See page 136 for details.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.




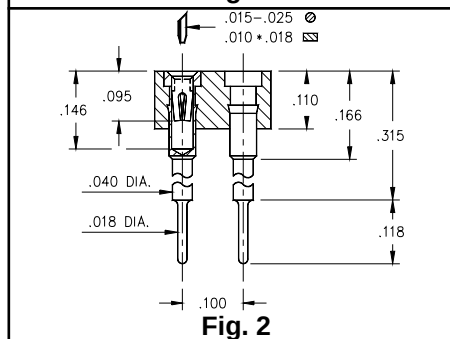


Fig. 1

Ordering Information

Fig. 1	Series 416...006 Standoff Height = .236"
	416-XX-2__-41-006 Specify # of pins → 02-64
Fig. 2	Series 416...003 Standoff Height = .315"
	416-XX-2__-41-003 Specify # of pins → 02-64
Fig. 3	Series 416...007 Standoff Height = .402"
	416-XX-2__-41-007 Specify # of pins → 02-64
Fig. 4	Series 416...008 Standoff Height = .472"
	416-XX-2__-41-008 Specify # of pins → 02-64
Fig. 5	Series 416...001 Standoff Height = .594"
	416-XX-2__-41-001 Specify # of pins → 02-64

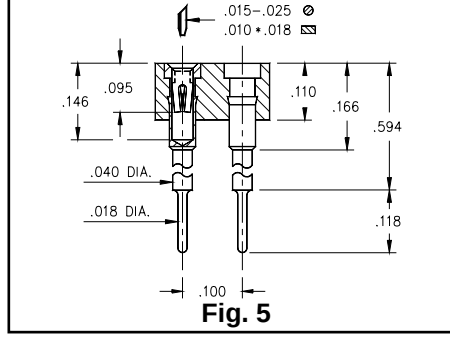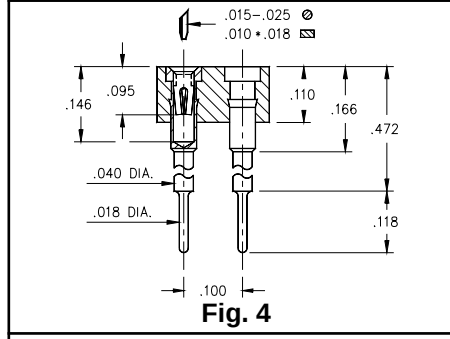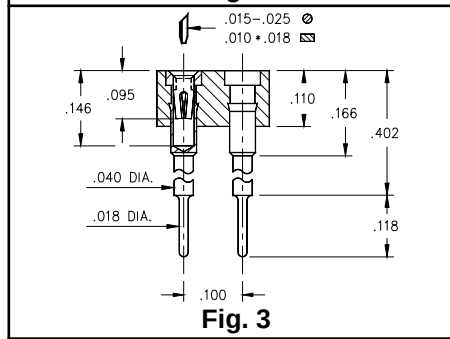

**XX= Plating Code
See Below**

**For High Temperature
Insulators Add '100'
To End Of
Part Numbers**

SPECIFY PLATING CODE XX=			93	
Sleeve (Pin)			200μ" Sn/Pb	
Contact (Clip)			30μ" Au	