PC, DVI & Video Interface for TFT LCD panels

Part #: 4171400XX-3



# The Digital View high integration OEM interface controller

The DVS-1600 is a cost-effective, high integrated interface controller for TFT LCD monitor applications. Supporting 4:3, 5:4, 16:9 and 16:10 formats up to a maximum of UXGA, the controller addresses both mainstream and legacy applications. A flexible port architecture provides inputs for DVI, VGA, Composite and S-Video along with a wide range of video modes. The DVS-1600 provides both TTL and LVDS outputs and can operate from either 12V or 24V supplies to address today's current panels.

## Panel Connectivity

•1600x1200

•1280x768

•800x480

•1366x768

•1024x768

•640x480

•1280x1024

•800x600

#### Input

Analog RGB: • 60Hz at UXGA

• 60Hz at SXGA, WXGA, XGA, SVGA, VGA

With auto detect of Digital Separate Sync, Sync-On-Green & Composite Sync. Auto detects VGA ~ UXGA, interlaced & non-interlaced.

DVI-D:

• 60Hz at UXGA

60Hz at SXGA, WXGA, XGA, SVGA, VGA

Video:

NTSC/PAL/SECAM (Interlaced)

· Composite Video · S-video

## Reliability

Calculated Mean Time Between Failures -260,000 hours. Warranty - 3 years.

#### Features

Colors: Up to 8 bit per color, ie 16.7 million colors.

Functions: On Screen Display (OSD) menu.

Function Controls: External buttons, Serial Port control.

Image Scaling: Up scaling to fit input to panel resolution.

Image Control: Brightness, Contrast, Saturation, Hue,

Frequency, Phase, Color temperature, Image position,

Hue, Gamma.

Other Features: Auto picture setup, Auto RGB calibration, Auto source seek, OSD timeout, OSD position, input source select, OSD menu lock, Direct key for input source switching.

Dimensions: 142mm x 92mm (5.60" x 3.60")

Form Factor: DV standard & mounting holes.

Power Requirements: +12V/+24VDC ±5%, 4W (controller only)

Panel Power: Supports 3.3V, 5V, 12V & 18V panels.

Panel Signal: TTL (Single pixel) & LVDS.

Inverter Support: DPMS Enable pin (3.3V or 5V)


Plug & Play: DDC 1,2/b compatible

Controller Status Indicator: Dual color LED support. Backlight Status Indicator: Dual color LED support.

Custom Engineering Services - custom input timing, panel timing, splash screen, OSD Menu, conformal coatings, layouts etc.



PC, DVI & Video Interface for TFT LCD panelsPart #: 4171400xx-3

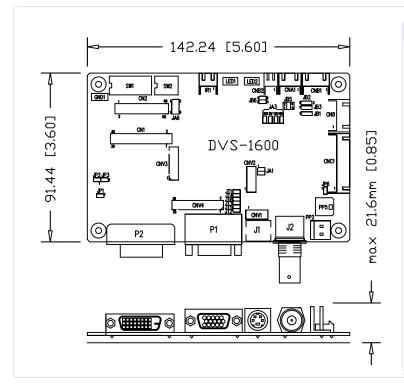

Connector Definitions			
CN1	LVDS panel signal		
CN2	TTL panel signal		
CN8	Serial Control (for firmware programming or		
	serial control only)		
CNA1	Auxiliary power output		
CNB1	Backlight inverter		
CNC1	OSD Function controls		
CNV1	Alternate video in		
CNV2	Reserved		
CNV3	Reserved		
CNV4	Reserved		
IR1	OEM only		
LED1	Dual color LED connector for controller status		
LED2	Dual color LED connector for backlight status		
P1	VGA analog input		
P2	DVI-D input		
PP2	Main power input (alternative)		
PP5	Main power input##		
J1	S-Video in		

## Accessories\*

Kit 60110-3	OSD Digital Button Board Kit
Kit 60121-3	OSD Vertical Membrane Kit
Kit 60125-3	OSD Horizontal Membrane Kit
416040010-3	Inverter Interface board
426013800-3	Power-Input Cable ##
426090200-3	RS-232 cable

<sup>\*</sup> See accessories page on website for details.

#### **Available Documentation**

Instruction Manual Revision control documentation Schematic diagrams (Subject to NDA)

Mechanical Drawings

Serial Port Programming Manual\*\*
Firmware Upgrade Manual\*\*

Composite Video in

MTBF Analysis\*\*

J2

# **Customer Engineering Services**

Digital View offers a wide range of customization for OEM customers. Services range from unique part number and configuration control, custom layouts and features.

Digital View offers managed product lifecycles with extended product lifetime options and EOL planning. US manufacturing is available on all Digital View products.

ASIA	USA	EUROPE
Digital View Ltd. 16th Floor Millennium City 3 370 Kwun Tong Road Kwun Tong, Hong Kong	Digital View Inc. 18440 Technology Drive Morgan Hill, CA 95037 USA	Digital View Limited. 6 Marylebone Passage, London, W1W 8EX UK
Tel: (852) 2861-3615 Fax: (852) 2520-2987 Email: hksales@digitalview.com	Tel: 1 (408) 782-7773 Fax: 1 (408) 782-7883 Email: ussales@digitalview.com	Tel: +44-(0)20-7631-2150 Fax: +44-(0)20-7631-2156 Email: uksales@digitalview.com

<sup>\*\*</sup> Available upon request.