

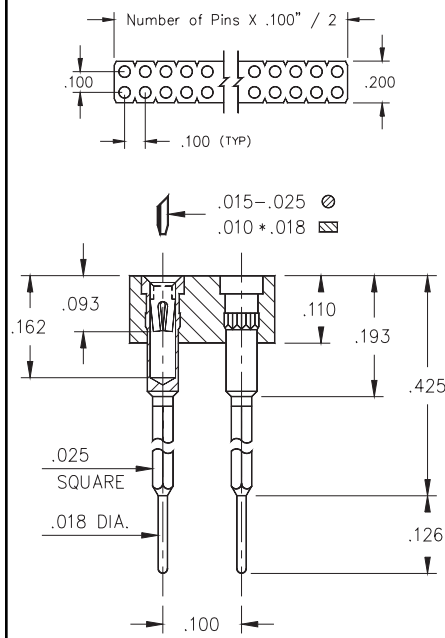


Fig. 1

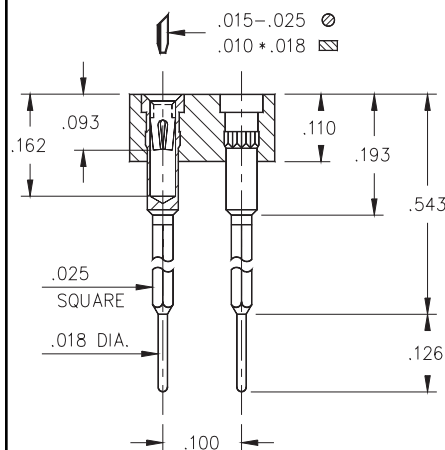


Fig. 2

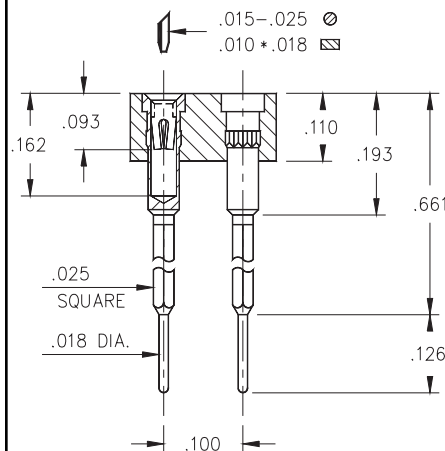


Fig. 3

- Wrapost / Solder tail combination for interconnect purposes are available in 3 lengths using pin numbers:

426...001 uses pin # 2601

426...002 uses pin # 2602

426...003 uses pin # 2603

See page 163 for details.

- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.

- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1

Series 426...001

1 Level Wrappost

426-XX-2_-41-001000

Specify # of pins

02-64

Fig. 2

Series 426...002

2 Level Wrappost

426-XX-2_-41-002000

Specify # of pins

02-64

Fig. 3

Series 426...003

3 Level Wrappost

426-XX-2_-41-003000

Specify # of pins

02-64



XX=Plating Code
See Below

For RoHS compliance
select plating code.

SPECIFY PLATING CODE XX=	13	93	43
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au	30μ" Au