

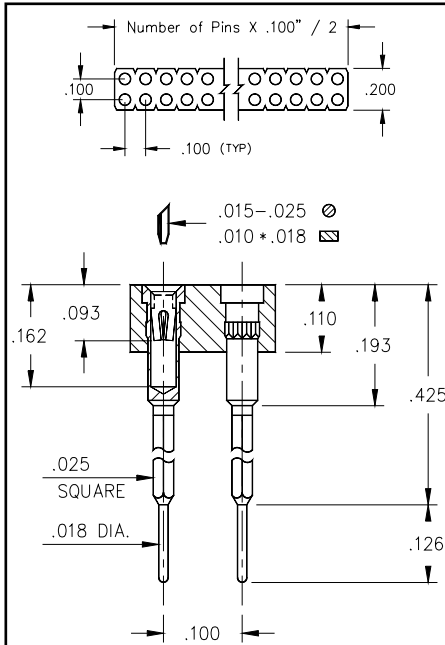


Fig. 1

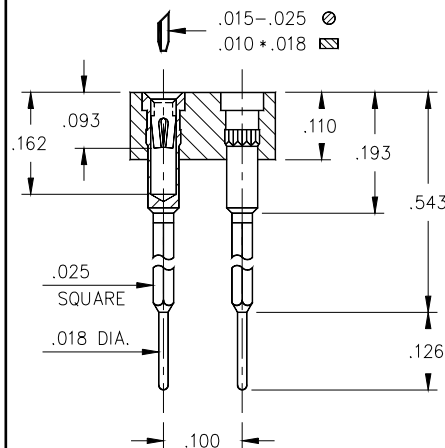


Fig. 2

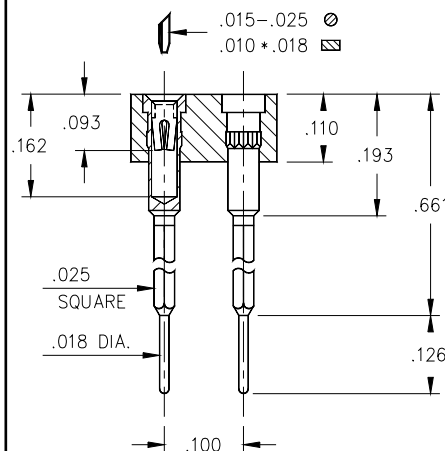


Fig. 3

- Wrapost/ solder tail combination for interconnect purposes: M-M# 2601, 2602 or 2603 pin receptacles. See page 163 for details.
- Hi-Rel, 4-finger #30 BeCu contact is rated at 3 amps. See page 208 for details.



Ordering Information

Fig. 1	Series 426...001	1 Level Wrapost
	426-XX-2_ -41-001	Specify # of pins → 02-64
Fig. 2	Series 426...002	2 Level Wrapost
	426-XX-2_ -41-002	Specify # of pins → 02-64
Fig. 3	Series 426...003	3 Level Wrapost
	426-XX-2_ -41-003	Specify # of pins → 02-64

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=	13	93
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb
Contact (Clip)	30μ" Au	30μ" Au