

Inlet filter, front side mounting, line switch 1-pole



Screw-On Version

C14

 70° C



Description

- Panel Mount:
Screw-on from front side
- 3 Functions:
Appliance Inlet Protection class I, Line switch 1-pole, Line-filter in standard version
- Quick connect terminals 6.3 x 0.8 mm
- Alternative: version without line filter [KEB1](#)
- We recommend for new applications the new type [DC12](#)

Approvals

- VDE License Number: 40004665 (FKS)
- UL License Number: E72928 (FKS)

Characteristics

- All single elements are already wired
- Line switch non-illuminated
- With EMC-shield
- Qualified for use in equipment according IEC/EN 60950

References

[General Product Information](#)

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Ratings IEC	1 - 10A @ Ta 40 °C / 250VAC; 50Hz
Ratings UL/CSA	1 - 10A @ Ta 40 °C / 125VAC; 60Hz
Leakage Current	standard < 0.5mA (250V / 60Hz)
Dielectric Strength	> 1.7kVDC between L-N > 2.7kVDC between L/N-PE Test voltage (2 sec)
Allowable Operation Temp.	-25 °C to 85 °C
Climatic Category	25/085/21 acc. to IEC 60068-1
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Quick connect terminals 6.3 x 0.8 mm
Panel Thickness s	Screw-on: max 8mm Mounting screw torque max 0.5Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	C14 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
Line Switch	Rocker switch 1 pole, non-illuminated, acc. to IEC 61058-1 Technical details
Line Filter	Standard Version, IEC 60939, IEC 60601-1, UL 1283, UL 544, EN 133 200, CSA C22.2 no. 8 Technical details
MTBF	> 2'100'000h acc. to MIL-HB-217 F

Dimensions


Length | 60.5 mm

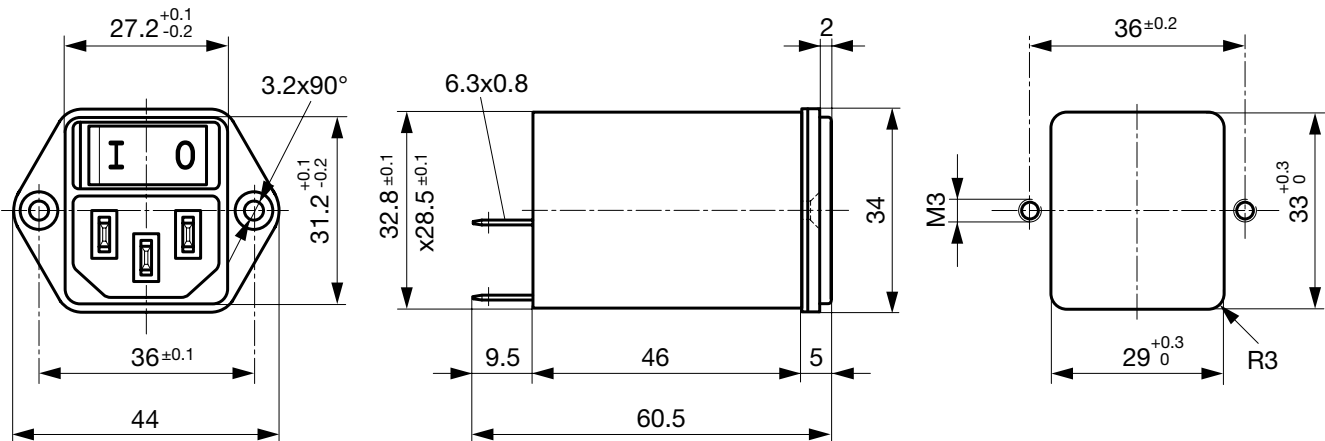

Technical Data of Filter-Components

Rated Current [A]	Filter-Type	Inductances L [mH]	Capacitance CX [nF]	Capacitance CY [nF]
1	Standard Version	2 x 10	68	2.2
2	Standard Version	2 x 4	68	2.2
4	Standard Version	2 x 1.5	68	2.2
6	Standard Version	2 x 0.8	68	2.2
10	Standard Version	2 x 0.3	68	2.2

Diagrams




- 1) Line
- 2) Load


Attenuation Loss

Standard version


1 A




2 A




4 A



6 A



10 A



--- differential mode ____ common mode

Variants

Rated Current [A]	Filter-Type	Order Number
1	Standard Version	4302.5001
2	Standard Version	4302.5002
4	Standard Version	4302.5003
6	Standard Version	4302.5004
10	Standard Version	4302.5005

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Packaging unit 10 Pcs

Accessory

Description

Assorted Covers
Rear Cover

0859.0075

Cord retaining kits
Cord retaining strain relieve

Countersunk, B

4700.0002

Passende Dose

Category / Description

Appliance Outlet



IEC appliance outlet F, screw-on mounting, front side, solder /quick connect terminal

4787

IEC appliance outlet F, screw-on mounting, front side, solder /quick connect terminal

4788

IEC appliance outlet F oder H, screw-on mounting, front side, solder/PCB/quick connect terminal

5091

IEC appliance outlet F oder H, screw-on mounting, front side, solder/quick connect terminal

5092

Connector



IEC cord connector C15, rewirable, straight

0101

IEC cord connector C15A, rewirable, straight

0102

IEC cord connector C15A, rewirable, straight

0102-G

IEC cord connector C15A, rewirable, angled

0112

IEC cord connector C13, rewirable, angled

4012

IEC cord connector C13, rewirable, angled

4013

IEC cord connector C13, rewirable, straight

4020

IEC cord connector C13, rewirable, straight

4021

IEC cord connector C13, rewirable, straight

4022

IEC cord connector C13, rewirable, angled

4300-06

...

Category / Description

Power Supply or Interconnection Cord



Power Cord with IEC Appliance Connector C13, angled, 70°C	0311
Power Cord with IEC Appliance Connector C13, angled, 70°C	3011
Power Cord with IEC Appliance Connector C13, angled, 70°C	3012
Power Cord with IEC Appliance Connector C13, angled, 70°C	3013
Power Cord with IEC Appliance Connector C13, 70°C	3020
Power Cord with IEC Appliance Connector C13, straight, 70°C	3027
Power Cord with IEC Appliance Connector C13, straight, 70°C	302U
Power Cord with IEC Appliance Connector C13, straight, 70°C	3030
Power Cord with IEC Appliance Connector C13, angled, 70°C	311L
Power Cord with IEC Appliance Connector C13, angled, 70°C	312L

...