



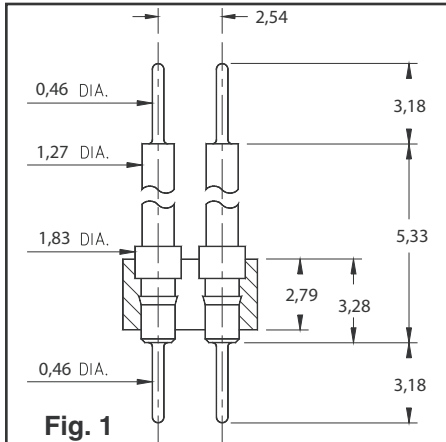

- Series 442 Interconnect Header strips come in four heights with 0,46 dia. pluggable solder tails at both ends.

442...591 uses pin #4259-1 (L = 5,33)
442...592 uses pin #4259-2 (L = 8,51)
442...593 uses pin #4259-3 (L = 14,86)
442...594 uses pin #4259-4 (L = 21,21)
See pages 170 for details.

- Insulators are high temp. thermoplastic.

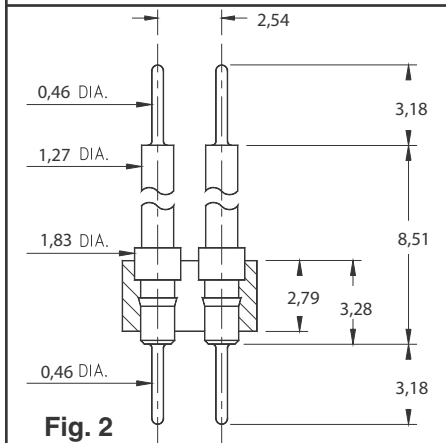

Ordering Information

Fig. 1

Series 442...591 0,46 / 0,46 Interconnect

442-XX-2__-00-591000

Specify # of pins → 02-64

Fig. 2

Series 442...592 0,46 / 0,46 Interconnect

442-XX-2__-00-592000

Specify # of pins → 02-64

Fig. 3

Series 442...593 0,46 / 0,46 Interconnect

442-XX-2__-00-593000



Specify # of pins → 02-64

Fig. 4

Series 442...594 0,46 / 0,46 Interconnect

442-XX-2__-00-594000

Specify # of pins → 02-64

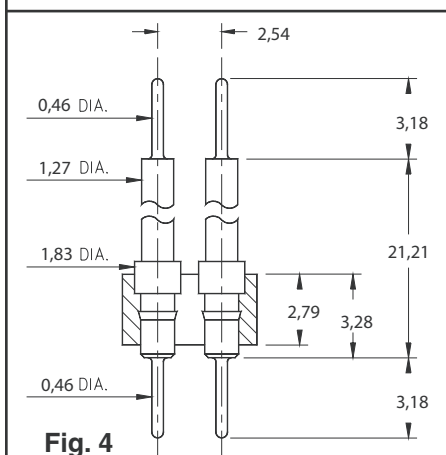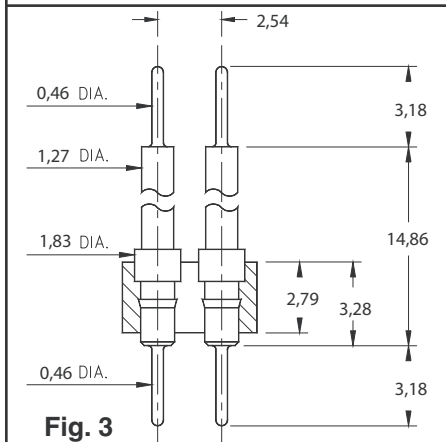

For RoHS compliance
select ◇ plating code.

XX=Plating Code
See Below

RoHS
2002/95/EC

SPECIFY PLATING CODE XX=

10◇

90

40◇

Pin Plating



0,25µm Au

5,08µm Sn/Pb

5,08µm Sn