

13 12 11 10 9 8 7 6 5 4 3 2 1

J

I

H

G

F





E

D

C

B

A

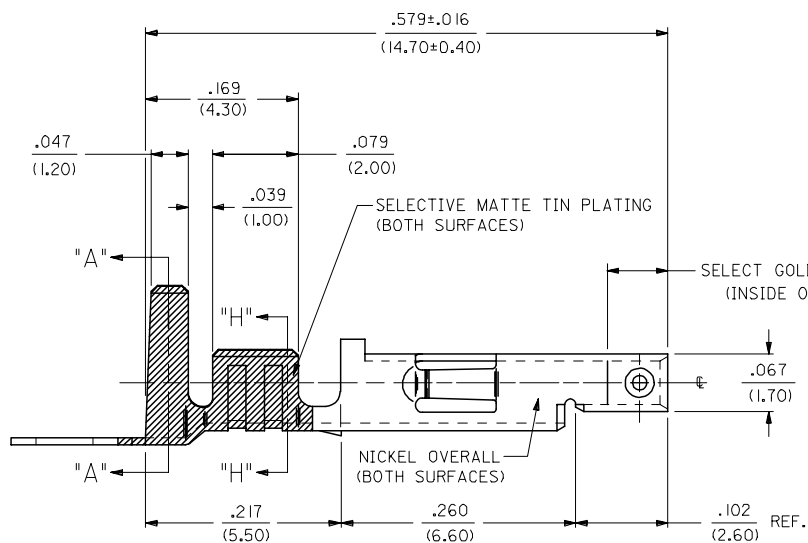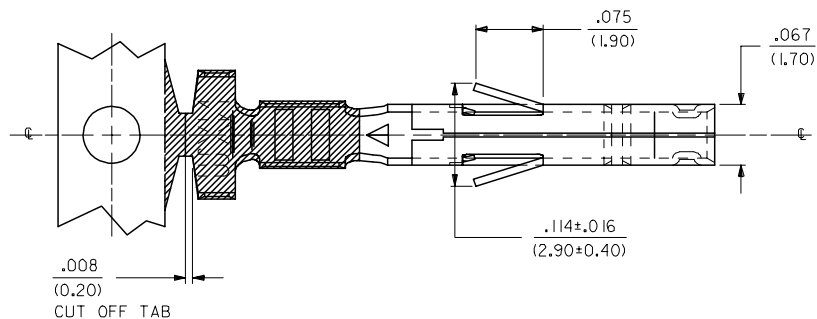

NOTES:

1. TERMINAL FOR USE WITH 5557 SERIES HOUSINGS.
2. MATES WITH 5558, 5566 AND 5569 SERIES CONNECTORS.
3. REFER TO DWG. NO. CS-5556*/5558* FOR CRIMP SPECIFICATIONS.
4. PRODUCT SPECIFICATION AND PROCESSING PARAMETERS: SEE PSX-44485-0001.


MATERIAL:

1. CDA 510 PHOS. BRONZE .0080±.0004/(0.203±0.010) THICK.

PLATING: PER SDES-88-***

- *2 = SELECTIVE GOLD PLATE .000030/(0.00076) MIN., AND SELECTIVE MATTE TIN .000100/(0.00254) OVER .000050/(0.00127) MIN. NICKEL OVERALL.
- *3 = SELECTIVE GOLD PLATE .000015/(0.00038) MIN., AND SELECTIVE MATTE TIN .000080/(0.00203) OVER .000050/(0.00127) MIN. NICKEL OVERALL.
- *4 = SELECTIVE GOLD PLATE .000050/(0.00127) MIN., AND SELECTIVE MATTE TIN .000100/(0.00254) OVER .000050/(0.00127) MIN. NICKEL OVERALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC." CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.



2	C1
1	C2
SHT.	REV.

REVISE NOTE 4 EC NO: UCP2006-1927 DRAWN: ADRIAN NOL 2006/02/17 CHKD: POLGAR 2006/02/17 APPR: JCOMERCIAL 2006/02/17 C2	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .010</td></tr><tr><td>2 PLACES</td><td>± 0.25</td><td>± .014</td></tr><tr><td>1 PLACE</td><td>± 0.36</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ±1/2°</td></tr></table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .010	2 PLACES	± 0.25	± .014	1 PLACE	± 0.36	± ---	ANGULAR ±1/2°			DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
					mm	INCH																				
				4 PLACES	± ---	± ---																				
				3 PLACES	± ---	± .010																				
				2 PLACES	± 0.25	± .014																				
1 PLACE	± 0.36	± ---																								
ANGULAR ±1/2°																										
DRAWN BY DATE GEP 08/08/94		HIGH CYCL'G TERM FEM CRIMP, MINI-FIT JR. BLANK-PLATE-FORM MOLEX MOLEX INCORPORATED																								
CHECKED BY DATE RJF 08/08/94																										
APPROVED BY DATE RJF 08/08/94																										
MATERIAL NO. SEE CHART		DOCUMENT NO. SD-44485-****				SHEET NO. 1 OF 2																				
SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																								

12 11 10 9 8 7 6 5 4 3 2 1

	13	12	11	10	9	8	7	6	5	4	3	2	1	
J	ITEM NO.		WIRE GAGE	QUANTITY PER REEL	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"	DIM. "G"	LEGEND: 44485 - * * * BASE NO. _____ CRIMP SIZE "1" = 18-24 "2" = 22-28 "3" = 16 "5" = 28-30 PLATING PER ES-88-*** _____ "2" = ES-88-537 "3" = ES-88-567 "4" = ES-88-570 CHAIN OR LOOSE "1" = CHAIN "2" = LOOSE			
	44485-1211	18-24 GA.	4,000	.142±.012	.177±.016	.035	.075±.012	.091±.016	.020					
	44485-1212			(3.60±0.30)	(4.50±0.40)	(0.90)	(1.90±0.30)	(2.30±0.40)	(0.50)					
X	44485-2211	22-28 GA.	6,000	.091±.012	.091±.016	.024	.071±.012	.065±.016	.016					
X	44485-2212			(2.30±0.30)	(2.30±0.40)	(0.60)	(1.80±0.30)	(1.65±0.40)	(0.40)					
X	44485-3211	16 GA.	4,000	.142±.012	.177±.016	.035	.091±.012	.106±.016	.024					
X	44485-3212			(3.60±0.30)	(4.50±0.40)	(0.90)	(2.30±0.30)	(2.70±0.40)	(0.60)					
X	44485-5211	28-30 GA.	6,000	.091±.012	.091±.016	.024	.050±.010	.044±.010	.010					
X	44485-5212			(2.30±0.30)	(2.30±0.40)	(.60)	(1.27±0.25)	(1.12±0.25)	(0.25)					
X	44485-1311	18-24 GA.	4,000	.142±.012	.177±.016	.035	.075±.012	.091±.016	.020					
X	44485-1312			(3.60±0.30)	(4.50±0.40)	(0.90)	(1.90±0.30)	(2.30±0.40)	(0.50)					
X	44485-2311	22-28 GA.	6,000	.091±.012	.091±.016	.024	.071±.012	.065±.016	.016					
X	44485-2312			(2.30±0.30)	(2.30±0.40)	(0.60)	(1.80±0.30)	(1.65±0.40)	(0.40)					
X	44485-3311	16 GA.	4,000	.142±.012	.177±.016	.035	.091±.012	.106±.016	.024					
X	44485-3312			(3.60±0.30)	(4.50±0.40)	(0.90)	(2.30±0.30)	(2.70±0.40)	(0.60)					
X	44485-5311	28-30 GA.	6,000	.091±.012	.091±.016	.024	.050±.010	.044±.010	.010					
X	44485-5312			(2.30±0.30)	(2.30±0.40)	(.60)	(1.27±0.25)	(1.12±0.25)	(0.25)					
X	44485-1411	18-24 GA.	4,000	.142±.012	.177±.016	.035	.075±.012	.091±.016	.020					
X	44485-1412			(3.60±0.30)	(4.50±0.40)	(0.90)	(1.90±0.30)	(2.30±0.40)	(0.50)					
X	44485-2411	22-28 GA.	6,000	.091±.012	.091±.016	.024	.071±.012	.065±.016	.016					
X	44485-2412			(2.30±0.30)	(2.30±0.40)	(0.60)	(1.80±0.30)	(1.65±0.40)	(0.40)					
X	44485-3411	16 GA.	4,000	.142±.012	.177±.016	.035	.091±.012	.106±.016	.024					
X	44485-3412			(3.60±0.30)	(4.50±0.40)	(0.90)	(2.30±0.30)	(2.70±0.40)	(0.60)					
X	44485-5411	28-30 GA.	6,000	.091±.012	.091±.016	.024	.050±.010	.044±.010	.010					
X	44485-5412			(2.30±0.30)	(2.30±0.40)	(.60)	(1.27±0.25)	(1.12±0.25)	(0.25)					
F														
E														
D														
C														
B														
A														
tb_frame_C_P_ME_T Rev. D 2004/04/02														

SEE SHEET ONE IEC NO: UCP2005-2253 DRAWN BY: DRWNL STEWART 2005/04/22 CHKD BY: POLGAR 2005/05/04 APPR: YMARULLI 2005/05/04	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY GEP	DATE 08/08/94	HIGH CYCL'G TERM FEM CRIMP, MINI-FIT JR. BLANK-PLATE-FORM MOLEX INCORPORATED			
			4 PLACES	± --- ± ---	CHECKED BY RJF	DATE 08/08/94				
			3 PLACES	± --- ± ---	APPROVED BY RJF	DATE 08/08/94				
2 PLACES		± --- ± ---	ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
1 PLACE		± --- ± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		2 OF 2	