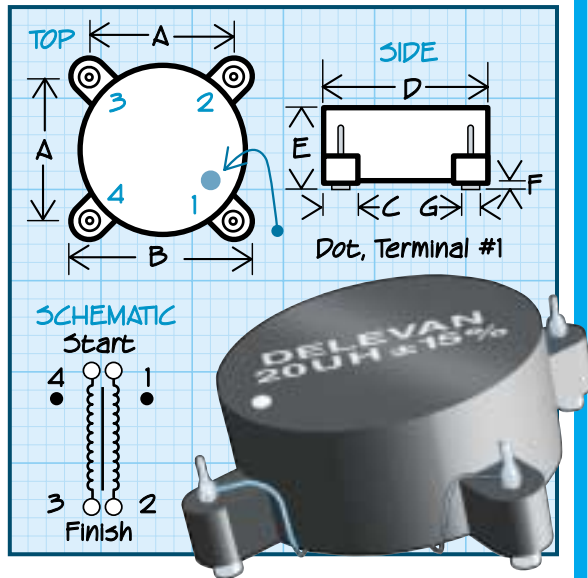


Surface Mount
High Current Power Toroids

Test Methods Solderability per MIL-STD-202, Method 208. Inductance tested at 10 KHZ and zero Amp DC. DC Resistance tested at 25°C

Mechanical Configuration A flat top surface mount case with excellent coplanarity of terminals.

Physical Parameters

	Inches	Millimeters
A	0.390 to 0.410	9.91 to 10.41
B	0.520 to 0.540	13.21 to 13.71
C	0.115 to 0.135	2.92 to 3.43
D	0.480 to 0.500	12.19 to 12.70
E	0.310 max.	7.87 max.
F	0.020 to 0.040	0.51 to 1.02
G	0.060 (Ref. only)	1.52 (Ref. only)

Electrical Configuration Two inductors per unit; internal terminals: #1(start) – #2(finish) & #4(start) – #3 (finish).

Series Externally connect #2 to #4.

Parallel Externally connect #1 to #4 and #2 to #3.

Operating Temperature Range -55°C to +125°C

Rated DC Current Based upon 20°C temperature rise from 25°C ambient and zero Amp DC

Maximum Power Dissipation at 25°C 0.313 Watts

Inductance Tolerance Tolerance is specified by suffixing an alpha character to the part number as follows: K = 10%, L = 15%. M = 20%. Units are normally supplied to the tolerance indicated in the tables.

Marking Parts are printed with Delevan, Inductance Value and Tolerance, and Dot at Terminal # 1.

DASH NUMBER*

0 AMPS DC PARALLEL
INDUCTANCE (μH)
TOLERANCERATED PARALLEL
DC CURRENT MAX. (AMPS)
PARALLEL DC
RESIST. MAX. (OHMS)0 AMPS DC SERIES
INDUCTANCE (μH)
TOLERANCERATED SERIES
DC CURRENT MAX. (AMPS)
SERIES DC RESISTANCE
MAX. (OHMS)

SERIES 4448 POWDERED IRON CORE

-02M	0.47	± 20%	7.90	0.005	2.00	± 20%	3.95	0.020
-04M	0.68	± 20%	7.20	0.006	3.00	± 20%	3.60	0.024
-06M	1.00	± 20%	5.90	0.009	4.00	± 20%	2.95	0.036
-08M	2.00	± 20%	4.60	0.014	8.00	± 20%	2.30	0.056
-10M	5.00	± 20%	3.30	0.027	20.0	± 20%	1.65	0.108
-12M	8.00	± 20%	3.00	0.033	32.0	± 20%	1.50	0.132
-14L	10.0	± 15%	2.50	0.047	40.0	± 15%	1.25	0.188
-16L	15.0	± 15%	2.30	0.057	60.0	± 15%	1.15	0.228
-18L	20.0	± 15%	1.90	0.085	80.0	± 15%	0.95	0.340
-20L	25.0	± 15%	1.60	0.116	100	± 15%	0.80	0.464
-22L	33.0	± 15%	1.30	0.166	132	± 15%	0.65	0.664
-24L	50.0	± 15%	1.20	0.202	200	± 15%	0.60	0.808
-26L	68.0	± 15%	1.10	0.238	272	± 15%	0.55	0.952
-28L	100	± 15%	0.72	0.565	400	± 15%	0.36	2.260
-30L	150	± 15%	0.64	0.696	600	± 15%	0.32	2.784
-32L	200	± 15%	0.60	0.810	800	± 15%	0.30	3.240
-34L	300	± 15%	0.54	1.003	1200	± 15%	0.27	4.012


SERIES 4448 FERROUS ALLOY CORE

-102M	0.47	± 20%	7.90	0.004	2.00	± 20%	3.95	0.016
-104M	0.68	± 20%	7.00	0.005	3.00	± 20%	3.50	0.020
-106M	1.00	± 20%	6.50	0.006	4.00	± 20%	3.25	0.024
-108M	2.00	± 20%	5.90	0.007	8.00	± 20%	2.95	0.028
-110M	5.00	± 20%	4.40	0.014	20.0	± 20%	2.20	0.056
-112M	8.00	± 20%	3.50	0.019	32.0	± 20%	1.75	0.076
-114L	10.0	± 15%	3.40	0.020	40.0	± 15%	1.70	0.080
-116L	15.0	± 15%	3.00	0.024	60.0	± 15%	1.50	0.096
-118L	20.0	± 15%	2.10	0.055	80.0	± 15%	1.05	0.220
-120L	25.0	± 15%	2.00	0.064	100	± 15%	1.00	0.254
-122L	33.0	± 15%	1.80	0.072	132	± 15%	0.90	0.288
-124L	50.0	± 15%	1.50	0.111	200	± 15%	0.75	0.444
-126L	68.0	± 15%	1.20	0.158	272	± 15%	0.60	0.632
-128L	100	± 15%	0.92	0.303	400	± 15%	0.46	1.212
-130L	150	± 15%	0.82	0.372	600	± 15%	0.41	1.488
-132L	200	± 15%	0.64	0.545	800	± 15%	0.32	2.180
-134L	300	± 15%	0.62	0.672	1200	± 15%	0.31	2.688

*Complete part # must include series # PLUS the dash #

For further surface finish information,
refer to TECHNICAL section of this catalog.

LAND PATTERN DIMENSIONS

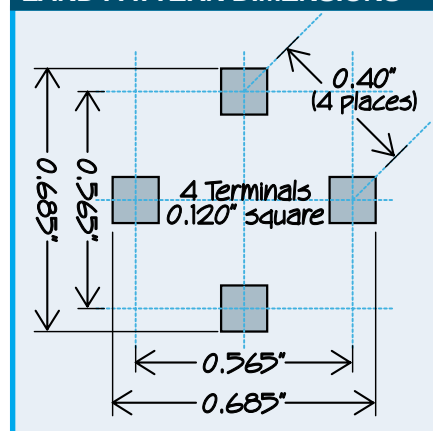

Inductance at Rated DC Current Minimum percent of measured zero Amp DC Inductance.

-02M to -34L = 60%; -102M to 134L = 50%

Packaging Tape & reel (24mm):

13" reel, 350 pieces max.; 7" reel not available