

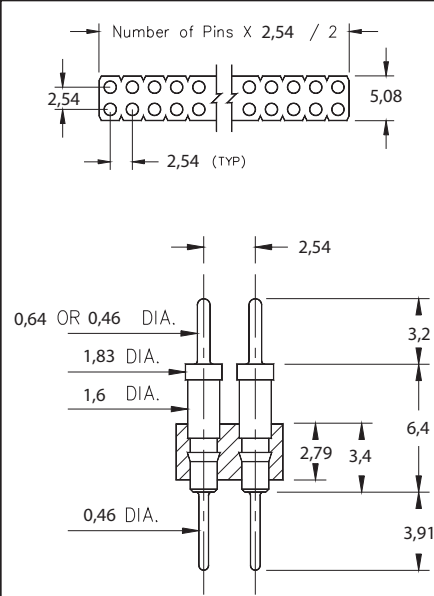


Fig. 1

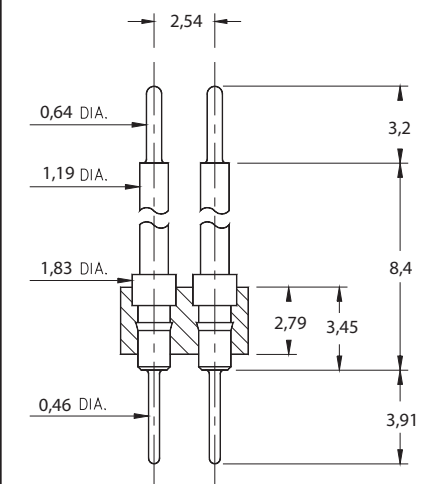


Fig. 2

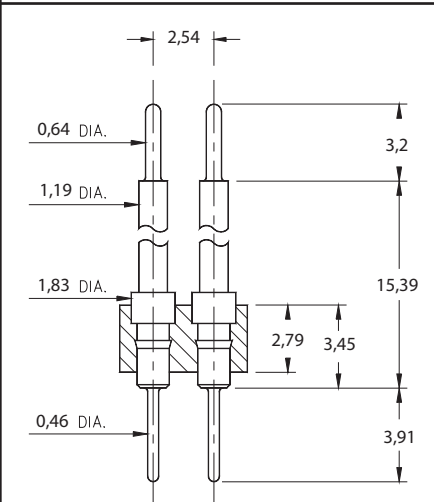


Fig. 3

- Series 451 Interconnect header strips come in three lengths with 0,46 dia. pluggable solder tails at one end and 0,64 dia. pins at the other, see series:
451...003 uses pin #5503
451...004 uses pin #5504
451...005 uses pin #5505
- 0,46 pluggable solder tails are available at both ends, please see series:
451...009 uses pin #5509
451...010 uses pin #5510
451...011 uses pin #5511
See pages 170 & 172 for details.
- Insulators are high temp. thermoplastic.



Ordering Information

Fig. 1

Series 451...003 0,46 / 0,64 Solder Tails

451-XX-2_ _-00-003000

Specify # of pins → 02-64

Series 451...009 0,46 / 0,46 Solder Tails

451-XX-2_ _-00-009000

Specify # of pins → 02-64

Fig. 2

Series 451...004 0,46 / 0,64 Solder Tails

451-XX-2_ _-00-004000

Specify # of pins → 02-64

Series 451...010 0,46 / 0,46 Solder Tails

451-XX-2_ _-00-010000

Specify # of pins → 02-64

Fig. 3

Series 451...005 0,46 / 0,64 Solder Tails

451-XX-2_ _-00-005000

Specify # of pins → 02-64

Series 451...011 0,46 / 0,46 Solder Tails

451-XX-2_ _-00-011000

Specify # of pins → 02-64




XX= Plating Code
See Below

For RoHS compliance
select plating code.

SPECIFY PLATING CODE XX=

10

Pin Plating



0,25µm Au