

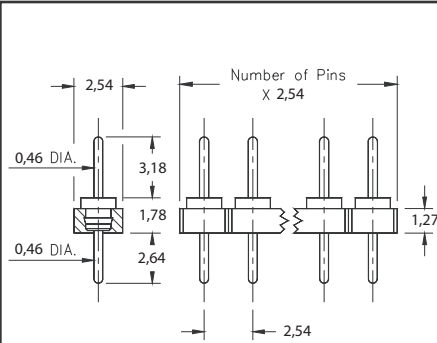


Fig. 1

- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available 1,78.
- Series 364 and 464 single and double row PCB interconnects offer 2,16 profile above board.
- Series 335 and 435 use MM #3516 pins. See page 170 for details.
- Series 364 and 464 use MM #6458 pins. See page 171 for details.
- Insulators are high temp. thermoplastic.

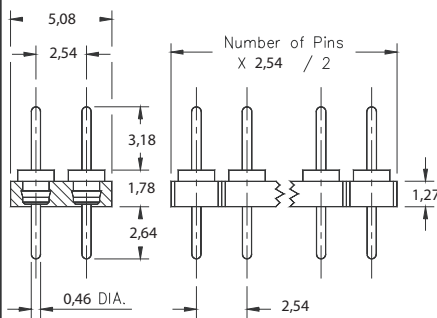
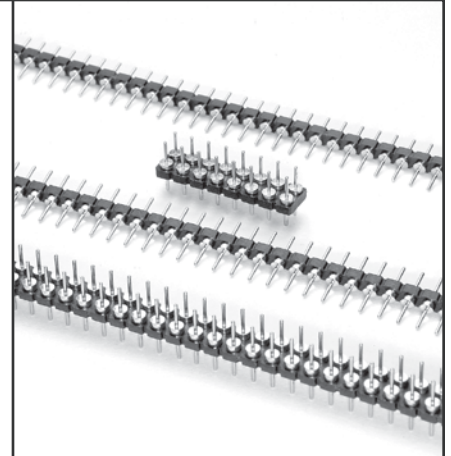


Fig. 2

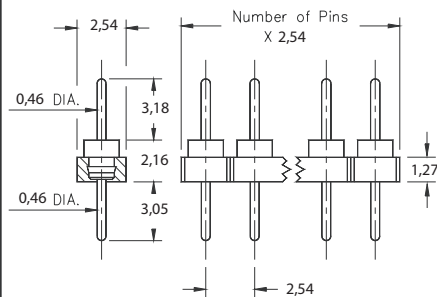


Fig. 3

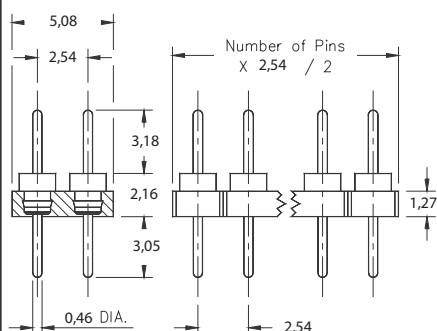


Fig. 4

Ordering Information

Fig. 1	Single Row	1,78 Profile Pin Header
	335-XX-1 _ _ -00-160000 Specify # of pins → 01-32	
Fig. 2	Double Row	1,78 Profile Pin Header
	435-XX-2 _ _ -00-160000 Specify # of pins → 02-72	
Fig. 3	Single Row	2,16 Profile Pin Header
	364-10-1 _ _ -00-580000 Specify # of pins → 01-32	
Fig. 4	Double Row	2,16 Profile Pin Header
	464-10-2 _ _ -00-580000 Specify # of pins → 02-72	

For RoHS compliance
 select ◊ plating code.

XX=Plating Code
See Below

RoHS
 2002/95/EC

SPECIFY PLATING CODE XX=	10 ◊	90	40 ◊	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	