


IEC appliance outlet F shuttered, snap-in mounting, front side, solder/quick connect terminal



4723

**Description**

- Panel Mount Snap-in version, from front side
- Connector shuttered, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- VDE License Number: 40010659
- UL License Number: E96454

Other versions on request

- For protection class II

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data



Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in: 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection class I
-------------------------	--


Dimensions

4723

Length | 35 mm

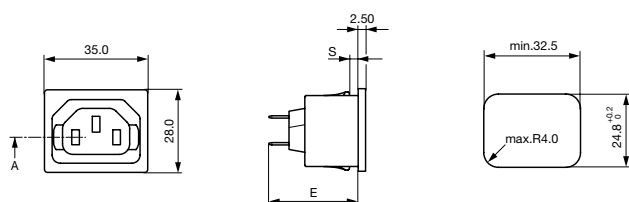

Shutter operation:
shutters opened by plug insertion



Shutter operation:
shutters closed when plug is removed

E: Solder terminals 3.5 x 0.8 mm: 28.4 mm
 E: SQuick connect terminals 4.8 x 0.8 mm: 31.1 mm
 E: Quick connect terminals 6.3 x 0.8 mm: 33.2 mm
 S: 1.0/1.2/1.5/2.0/2.5/3.0 mm

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Type	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
4723	Snap-in	1	Quick connect terminals 4.8 x 0.8 mm	4723.0100
4723	Snap-in	1.2	Quick connect terminals 4.8 x 0.8 mm	4728.0100
4723	Snap-in	1.5	Quick connect terminals 4.8 x 0.8 mm	4724.0100
4723	Snap-in	2	Quick connect terminals 4.8 x 0.8 mm	4725.0100
4723	Snap-in	2.5	Quick connect terminals 4.8 x 0.8 mm	4726.0100
4723	Snap-in	3	Quick connect terminals 4.8 x 0.8 mm	4727.0100
4723	Snap-in	1	Quick connect terminals 6.3 x 0.8 mm	4723.0000
4723	Snap-in	1.2	Quick connect terminals 6.3 x 0.8 mm	4728.0000
4723	Snap-in	1.5	Quick connect terminals 6.3 x 0.8 mm	4724.0000
4723	Snap-in	2	Quick connect terminals 6.3 x 0.8 mm	4725.0000
4723	Snap-in	2.5	Quick connect terminals 6.3 x 0.8 mm	4726.0000
4723	Snap-in	3	Quick connect terminals 6.3 x 0.8 mm	4727.0000
4723	Snap-in	1	Solder terminals 3.8 x 0.8 mm	4723.0300
4723	Snap-in	1.2	Solder terminals 3.8 x 0.8 mm	4728.0300
4723	Snap-in	1.5	Solder terminals 3.8 x 0.8 mm	4724.0300
4723	Snap-in	2	Solder terminals 3.8 x 0.8 mm	4725.0300
4723	Snap-in	2.5	Solder terminals 3.8 x 0.8 mm	4726.0300
4723	Snap-in	3	Solder terminals 3.8 x 0.8 mm	4727.0300

Class II product also available on request

Cord retaining clamps and insulation covers see accessories

Packaging unit

100 Pcs

Accessory

Description



[Assorted Covers](#)
Rear Cover

0859.0047



[Cord retaining kits](#)
Cord retaining strain relieve

Flat head, E 4700.0005

Flat head, G 4700.0007

Mating Inlets/Plugs

Category / Description

[Interconnection Cord](#)

Power Cord with IEC Appliance Plug E, angled, 70°C 0607

Power Cord with IEC Appliance Plug E, angled, 70°C 0608

Power Cord with IEC Appliance Plug E, straight, 70°C 0609

Power Cord with IEC Appliance Plug G, angled, 70°C 607B

Power Cord with IEC Appliance Plug G, angled, 70°C 608B

Power Cord with IEC Appliance Plug G, straight, 70°C 609B



Plug Connector

IEC plug connector E, rewirable, straight, max. cable diameter 8.5 mm	4732
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4733
IEC plug connector E, rewirable, straight, max. cable diameter 10 mm	4735
IEC plug connector E, rewirable, angled, max. cable diameter 10 mm	4736
IEC plug connector E, rewirable, straight	9009
IEC plug connector E, rewirable, angled	9013
IEC plug connector E, rewirable, angled	P685