


Plug Coupler IEC C20 / IEC J, Screw-on Mounting



Rear side

**Description**

- Panel Mount:
Screw-on from front or rear-side
- Appliance Inlet, Pin temperature 70 °C, Protection class I

Approvals

- UL License Number: E96454

References

[General Product Information](#)

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Ratings IEC	16 A / 250 VAC; 50 Hz
Ratings UL/CSA	20 A / 125 VAC; 60 Hz
Dielectric Strength	> 4 kVAC between L-N > 6 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529 from rear-side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Panel Thickness s	Screw-on: Mounting screw torque max 0.5 Nm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	C20 acc. to IEC/EN 60320-1 and J acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16 A, Protection class I
-------------------------	--

Dimensions

Length | 53 mm

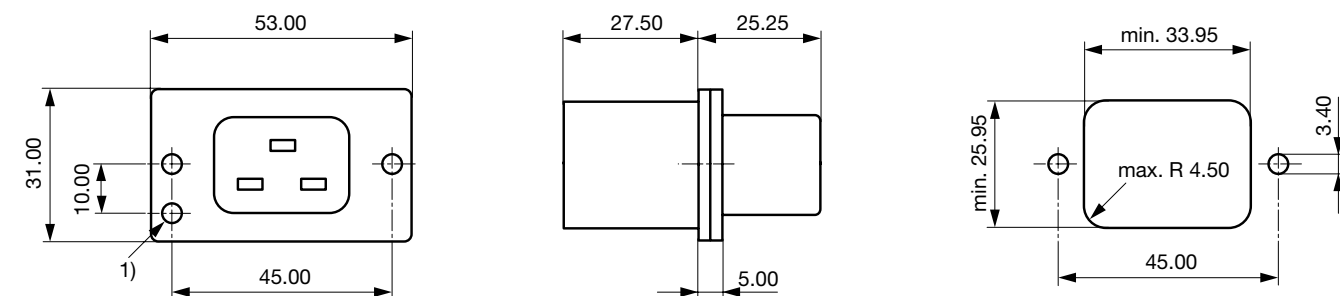

1) Orientation hole

Variants

Panel mounting	Panel Thickness s [mm]	Order Number
Screw-on	8	4730.0100

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Packaging unit

100 Pcs

Mating Inlets/Plugs

Category / Description

Plug



IEC Plug I, Cord Connector (Rewireable), Straight	0106
IEC Plug I, Cord Connector (Rewireable), Straight	0922
IEC Plug I, Cord Connector (Rewireable), Angled	1611
IEC Plug I, Cord Connector (Rewireable), Straight	1612
IEC Plug I, Cord Connector (Rewireable), Angled	4789
IEC Plug I, Cord Connector (Rewireable), Straight	4796

Mating Outlets/Connectors

Connector



IEC Connector C19, Rewireable, Straight	0104
IEC Connector C19, Rewireable, Angled	1651
IEC Connector C19, Rewireable, Straight	1652
IEC Connector C19, Rewireable, Angled	4790
IEC Connector C19, Rewireable, Straight	4795



Power Cord

Power Cord with IEC Connector C19, Straight	1654
---	------



Power Supply or Interconnection Cord

Divers Power Supply and Interconnection Cords 10 A	4300.0920
Diverse Netzanschluss- oder Netzweiterverbindungsleitung 16 A	6009.5195