

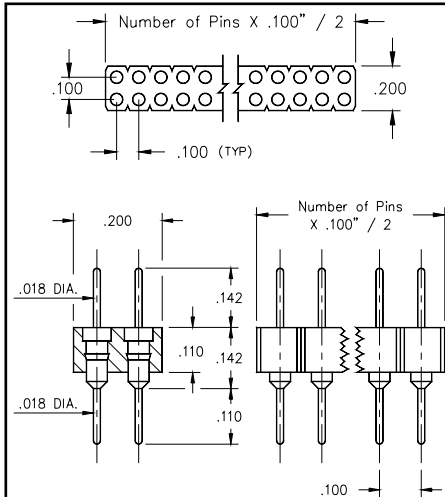


Fig. 1

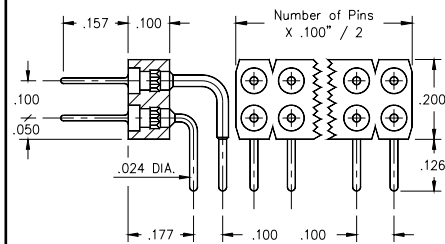


Fig. 2

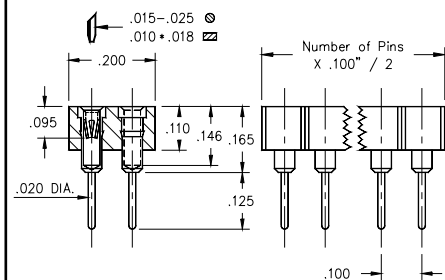


Fig. 3

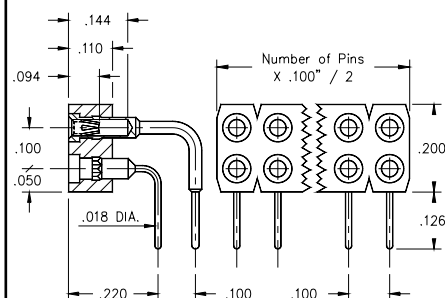


Fig. 4

- Series 4XX sockets are available with straight and right angle solder tails.
- Series 450 & 499...009 use MM# 3404 & 5011/5113 pins respectively. (See pages 170 & 172 for details)
- Series 410 & 499...003 use MM# 1001 & 1103/1602 pins respectively. (See pages 134-136 for details)
- Hi-Temp thermoplastic insulator available upon request.



Ordering Information

Fig. 1	Series 450...006	Straight Pin Header
	450-XX-2__-00-006	Specify # of pins → 02-64
Fig. 2	Series 499...009	Right Angle Pin Header
	499-XX-2__-10-009	Specify # of pins → 02-64

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10μ" Au	200μ" Sn/Pb		

Fig. 3	Series 410...001	Straight Socket
	410-XX-2__-41-001	Specify # of pins → 02-64
Fig. 4	Series 499...003	Right Angle Socket
	499-XX-2__-10-003	Specify # of pins → 02-64

*XX= Plating Code
See Below*

SPECIFY PLATING CODE XX=	13		93	
Sleeve (Pin)	10μ" Au		200μ" Sn/Pb	
Contact (Clip)	30μ" Au		30μ" Au	