



CONTACT CONFIGURATION

DPDT

| SWITCH FUNCTION |        |         |
|-----------------|--------|---------|
| PDS. 1          | PDS. 2 | PDS. 3  |
|                 |        |         |
| DN              | NONE   | DN      |
| 2-1,5-4         | OPEN   | 2-3,5-6 |

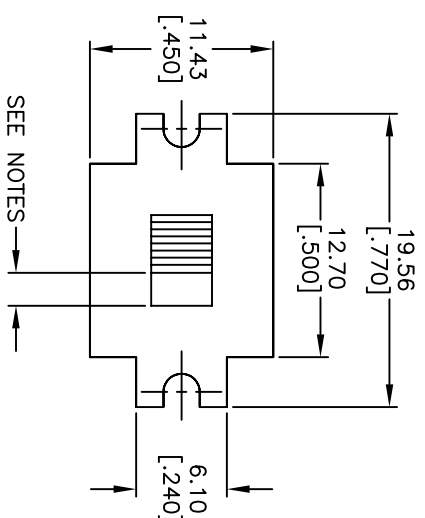



NOTES:  
BRACKET CROPPED  
FOR CLARITY.



VIEW A-A

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A@120V AC OR 28V DC, 2A@250V AC
5. FIXED AND MOVING: COPPER ALLOY W/ SILVER PLATE
6. CONTACT RESISTANCE: 10mΩ TYP
7. INSULATION RESISTANCE: 1,000 MΩ min.
8. ELECTRICAL LIFE: 30,000 ACTUATIONS @ FULL LOAD
9. OPERATING TEMP: -30°C TO 85°C
10. TRAVEL: 2.16 MM
11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
12. 2002/95/EC (ROHS) COMPLANT

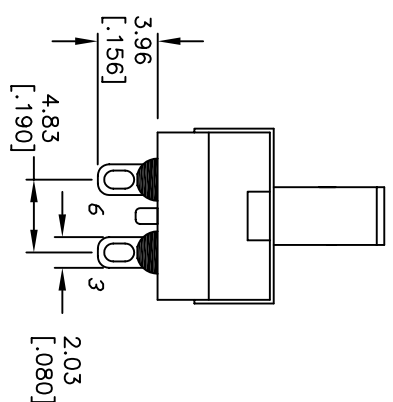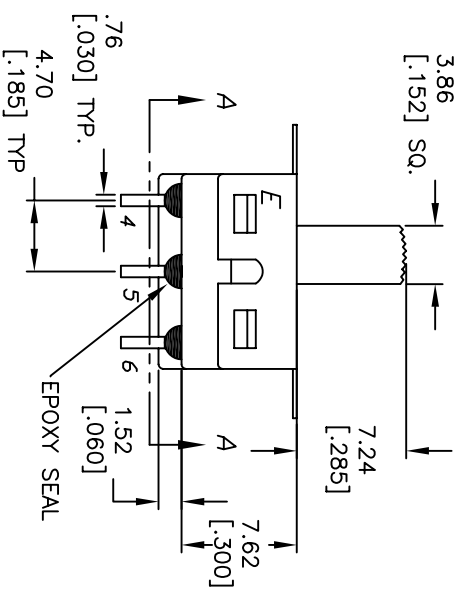

|                                                                                                              |         |                             |         |
|--------------------------------------------------------------------------------------------------------------|---------|-----------------------------|---------|
| E-SWITCH™                                                                                                    |         |                             |         |
| B                                                                                                            | 17311   | FIXED NOTE 4, ADDED NOTE 12 | TN      |
| A                                                                                                            | 13750   | RELEASED FOR PRODUCTION     | AR      |
| REV.                                                                                                         | ECN No. | DESCRIPTION                 | DATE    |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |         | SCALE                       | DATE    |
|                                                                                                              |         | 2:1                         | 5/21/07 |
|                                                                                                              |         | DR                          | TN      |
|                                                                                                              |         | DWG                         | T521021 |
|                                                                                                              |         | REV                         | B       |