


CONTACT CONFIGURATION


DPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-1,5-4	OPEN	2-3,5-6

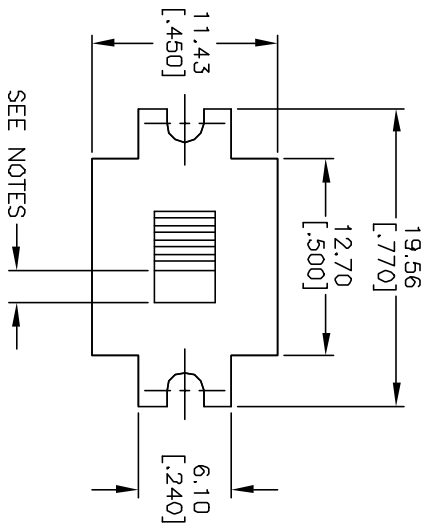



SEE NOTES -

NOTES:
BRACKET CROPPED
FOR CLARITY.



VIEW A-A

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 0.4VA@20V (AC OR DC)
 5. FIXED AND MOVING: COPPER ALLOY W/ SILVER PLATE
 6. CONTACT RESISTANCE: 10mΩ TYP
 7. INSULATION RESISTANCE: 1,000 MΩ min.
 8. ELECTRICAL LIFE: 30,000 ACTUATIONS @ FULL LOAD
 9. OPERATING TEMP: -30°C TO 85°C
 10. TRAVEL: 2.16 MM
 11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL

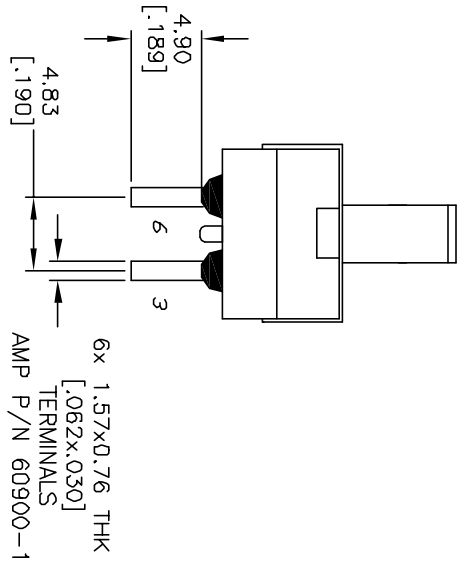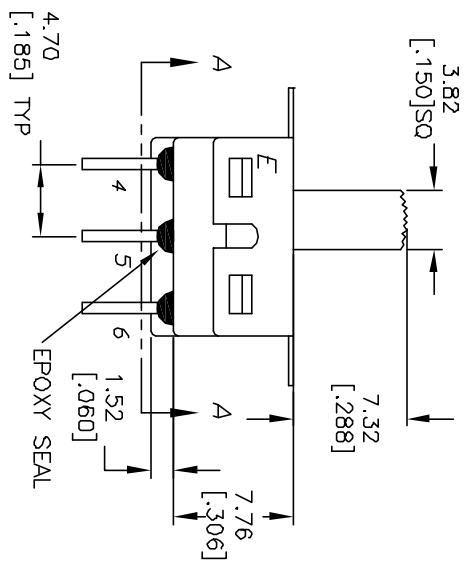

TITLE			
500 SDP-1 S2 M3 Q E B			
E-SWITCH®			
REV.	ECN No.	DESCRIPTION	DATE
A	11817	RELEASED FOR PRODUCTION	11/07/01
SCALE	DATE	DR	DWG
2:1	11/07/01	CJC	TS21014
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			REV
			A