


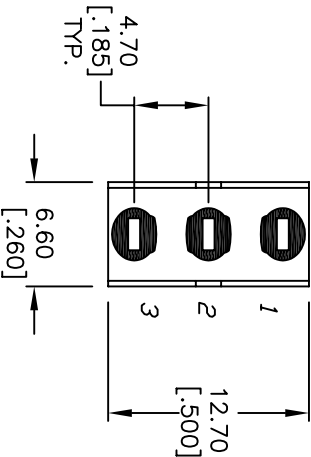
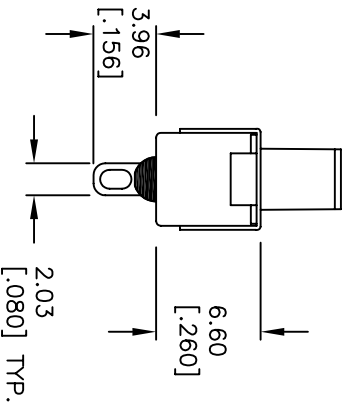

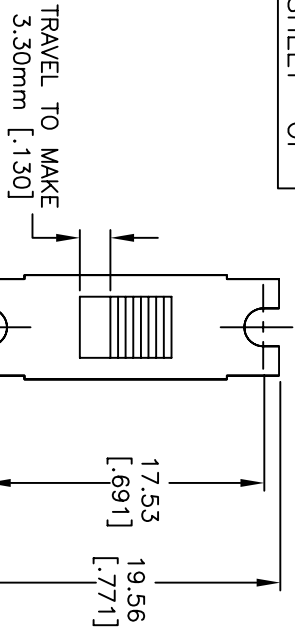


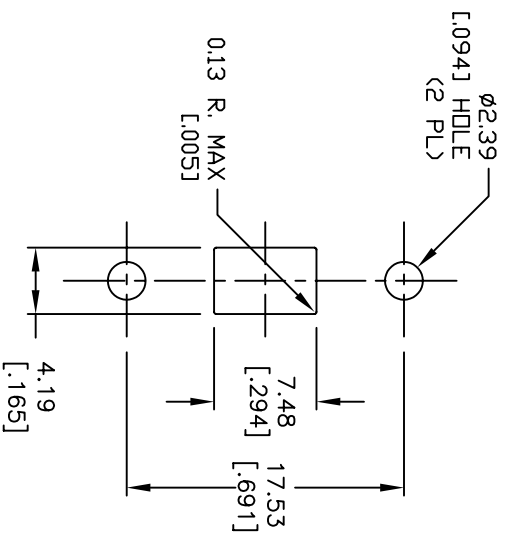

Nylon (UL 94HB)

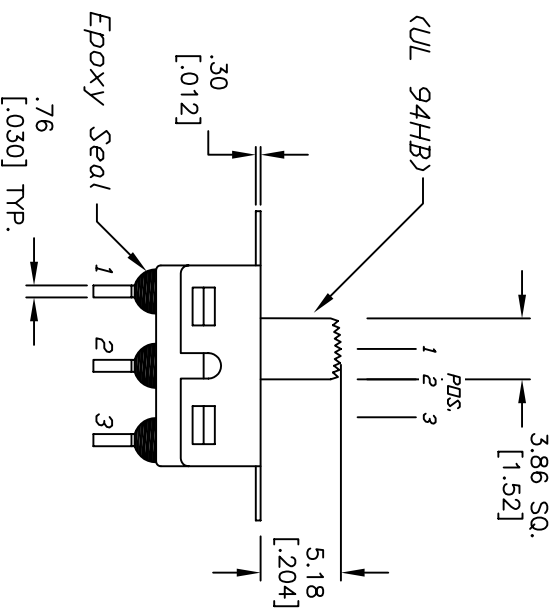

RECOMMENDED PANEL CUTOUT



CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC: 2A @250VAC
5. CONTACT MATERIAL: Copper Alloy w/Silver plate
6. ELECTRICAL LIFE: 30,000 ACTUATIONS @Full Load
7. INSULATION RESISTANCE: 1000 Mega Ohms min.
8. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL.
9. OPERATING TEMPERATURE: -30°C TO 85°C
10. 2002/95/EC (ROHS) COMPLIANT

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DIFF	DN	
2-1	DPEN	2-3	

E-SWITCH®

C	15970	UPDATE SWITCH TRAVEL DIM.	4/18/06	CT	TITLE 500 SSP-3 S1 M1 Q E B		
B	15901	EDIT PANEL DIM, ADD RCHS	3/27/06	PH			
A	12100	RELEASED FOR PRODUCTION	4/29/02	CJB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 4/29/02	DR CJB
					DWG T511204		REV C