


3406/3407




Basic Part Number	Shoulder Height V
3406-0	8,89
3407-0	15,24

340X-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

0315




Basic Part Number	Head Height K	Stand-off Height S
0315-0	0,76	4,83
0315-1	1,02	10,92

0315-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole
Pin material is Ph Br 544 (B2)

5503/5509




Basic Part Number	Pin Diameter H
5503-0	0,64
5509-0	0,46

550X-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

5504/5505




Basic Part Number	Standoff Height S
5504-0	8,41
5505-0	15,39

550X-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

3409




Basic Part Number	Pin Length A
3409-1	5,33
3409-2	10,67

3409-X-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole


5011



5011-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

5113

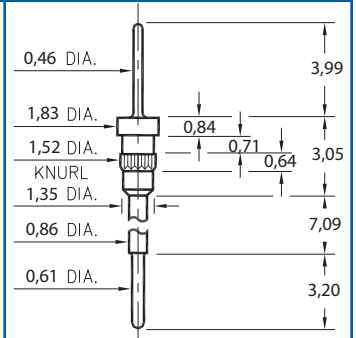

5113-0-00-XX-00-00-03-0

Press-fit in 1,45 mounting hole

SPECIFICATIONS

PIN MATERIAL:
Brass Alloy 360, 1/2 Hard
(Except where noted)

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: $\pm 0,13$
DIAMETERS: $\pm 0,05$
ANGLES: $\pm 2^\circ$

ORDER CODE: XXXX - X - 00 - XX - 00 - 00 - 03 - 0

BASIC PART #

SPECIFY PIN FINISH:

- 01 5,08 μm TIN/LEAD OVER NICKEL
- 80 5,08 μm TIN OVER NICKEL $\diamond$
- 15 0,25 μm GOLD OVER NICKEL $\diamond$
- 21 0,51 μm GOLD OVER NICKEL $\diamond$
- 34 1,27 μm GOLD OVER NICKEL $\diamond$

