

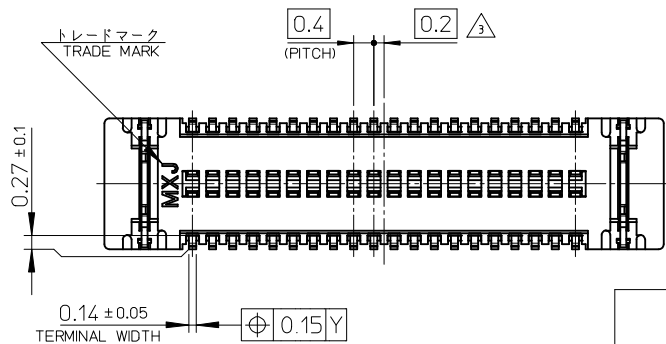

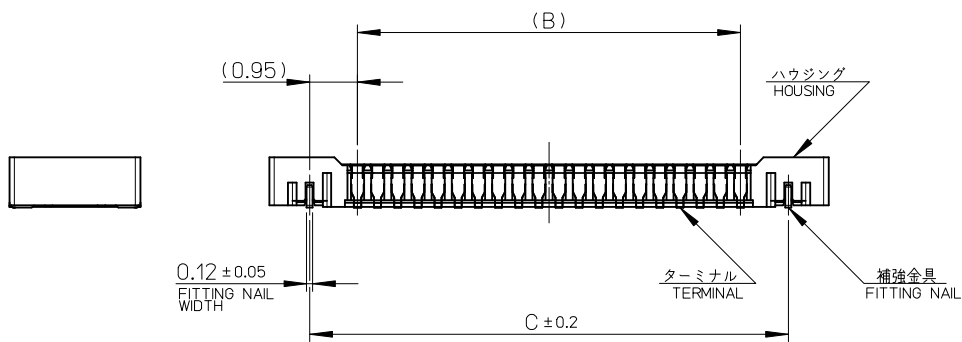


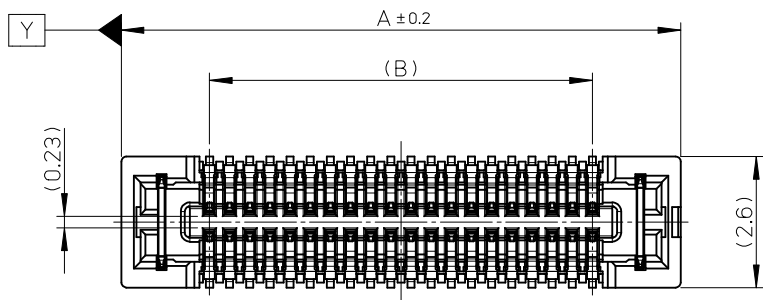

17.5	15.6	19.1	502426-8010	502426-8019	80
14.3	12.4	15.9	502426-6410	502426-6419	64
13.5	11.6	15.1	502426-6010	502426-6019	60
11.5	9.6	13.1	502426-5010	502426-5019	50
10.3	8.4	11.9	502426-4410	502426-4419	44
9.5	7.6	11.1	502426-4010	502426-4019	40
7.9	6.0	9.5	502426-3210	502426-3219	32
6.7	4.8	8.3	502426-2610	502426-2619	26
5.9	4.0	7.5	502426-2210	502426-2219	22
5.5	3.6	7.1	502426-2010	502426-2019	20
4.3	2.4	5.9	502426-1410	502426-1419	14
C	B	A	EMBOSSED TAPE	MATERIAL No.	CKT.
			ORDER No. オーダー番号		
			MODEL No. : 502426-**19		

REVISED EC NO: J2009-0819 DRWN:YAOYAGI CHKD:YUHASSEGAWA APPR:NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY RTAKEUCHI	DATE 2007/10/03	TITLE 0.4 B-TO-B CONN. HGT=1.0 W=2.6 REC ASSY				
		10 OVER 30 UNDER	± ---	CHECKED BY MSASAO	DATE 2007/10/03					
		30 OVER	± ---	APPROVED BY MSASAO	DATE 2007/10/03	MOLEX INCORPORATED				
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.				SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-502426-001				1 OF 2
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

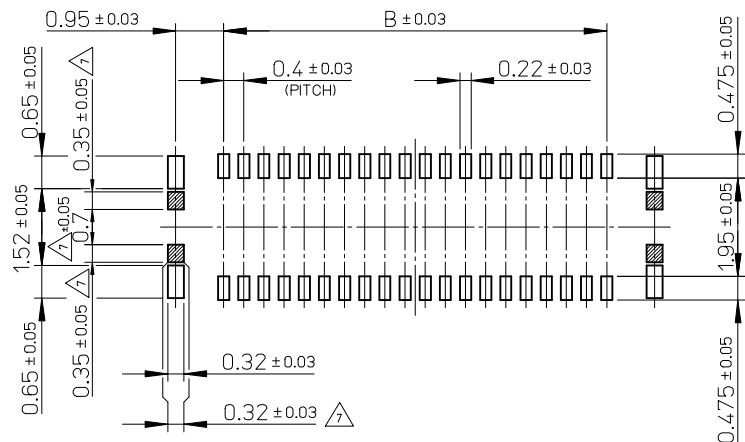

P.C.BOARD PATTERN LAYOUT
(REFERENCE)

注記 NOTES

1. 使用材料 MATERIAL

ハウジング：液晶ポリマー（ LCP ） ガラス充填 UL94V-0（ 黒 ）
HOUSING: LIQUID CRYSTAL POLYMER (GLASS FILLED) UL94V-0 (COLOR: BLACK)
ターミナル：りん青銅（t=0.1）
TERMINAL： PHOSPHOR BRONZE (t=0.1)
金具：りん青銅（t=0.12）
FITTING NAIL： PHOSPHOR BRONZE (t=0.12)

2. メッキ仕様 PLATING

ターミナル TERMINAL

金メッキ 0.1 マイクロメートル以上
GOLD 0.1MICROMETER MINIMUM
下地メッキ：ニッケルメッキ 1.0 マイクロメートル以上
UNDER PLATING： NICKEL 1.0MICROMETER MINIMUM
※コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.
※封孔処理品

金具 FITTING NAIL

フラッシュ金メッキ
FLASH Au PLATING
下地メッキ：ニッケルメッキ 1.0 マイクロメートル以上
UNDER PLATING： NICKEL 1.0MICROMETER MINIMUM

△3 { 全極数 / 2 } = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.

4. 嵌合相手： 502430 シリーズ
MATE WITH： 502430 SERIES.

5. テール平坦度は、 0.08 以下
テール及び金具の平坦度は、 0.1 以下
TAIL COPLANARITY TO BE 0.08MAXIMUM.
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1MAXIMUM.


6. ELV 及び RoHS適合品
ELV AND RoHS COMPLIANT.

△7 斜線部はパターン書込み禁止範囲と半田禁止範囲を示す。
ただし、斜線部に補強金具と同一配線を配置する場合はレジストを施し、この部分に半田は無きこと。
NO PATTERN CIRCUIT AND NO SOLDER ALLOWED IN THE SHADED AREA.
HOWEVER, IF NEEDED TO ADD A TRACE OF THE SAME CIRCUIT, PUT THE SOLDER-RESIST,
YET NO SOLDER ALLOWED IN THE AREA.


REVISED EC NO: J2009-0819 DRWN:YAYAGI 2009/01/24 CHKD:YUASEGAWA 2009/02/18 APPR:NUKITA 2009/02/18	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY RTAKEUCHI	DATE 2007/10/03	TITLE 0.4 B-TO-B CONN. HGT=1.0 W=2.6 REC ASSY				
		10 OVER 30 UNDER	± ---	CHECKED BY MSASAO	DATE 2007/10/03					
		30 OVER	± ---	APPROVED BY MSASAO	DATE 2007/10/03	MOLEX INCORPORATED				
		ANGULAR	± --- °	MATERIAL NO. SEE SHEET 1		DOCUMENT NO. SD-502426-001			SHEET NO. 2 OF 2	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
		FIG	REV							

注記 NOTES


- 製品詳細寸法については製品単体図面を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING.
- 梱包数量 : 3000 個/リール
NUMBER OF CONNECTORS : 3000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

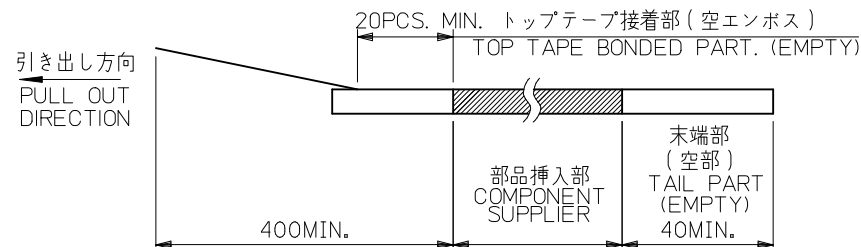

- 材料 MATERIAL
キャリアテープ (CARRIER TAPE) : ポリスチレン (POLYSTYRENE)
トップテープ (TOP TAPE) : PET , OTHER
リール (REEL) : ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- ELV 及び RoHS適合品
ELV AND RoHS COMPLIANT

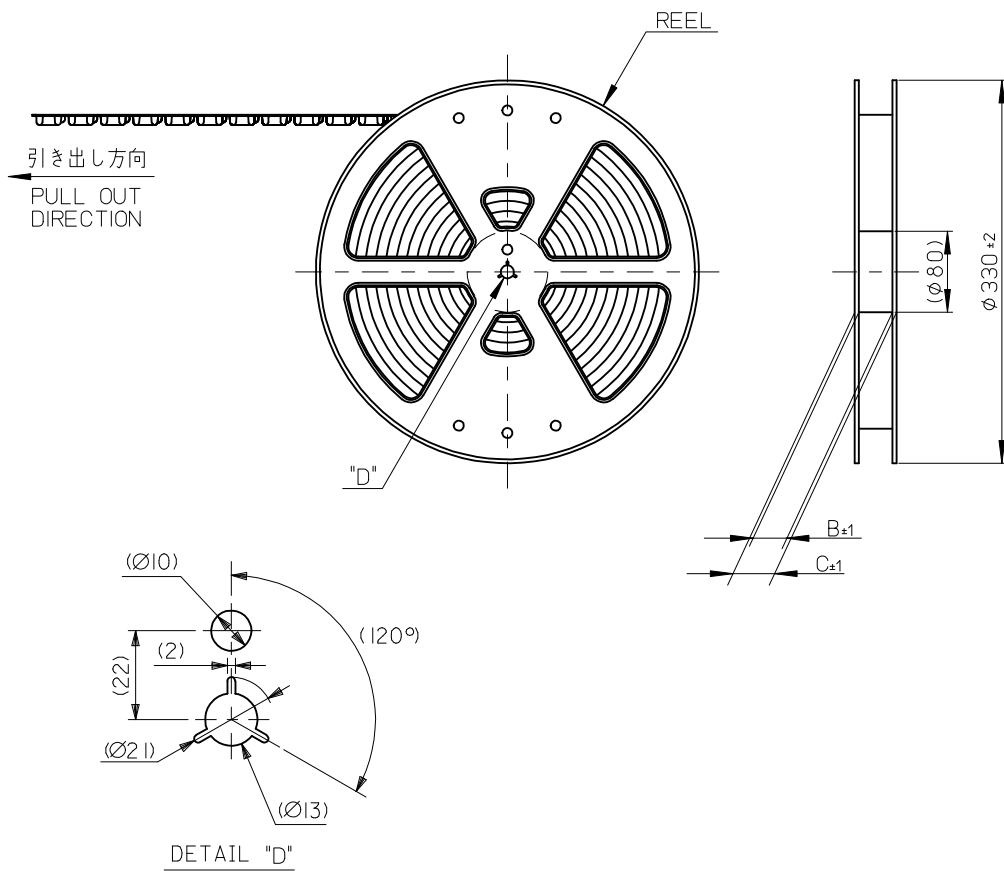

REVISED	EC NO: J2009-0819 DRWN: YAOYAGI CHKD: YUASEGAWA APPR: NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	DEL NO. 502426-002 THIRD ANGLE PROJECTION
			10 UNDER ± ---		DRAWN BY DATE RTAKEUCHI 2007/10/03		TITLE 0.4 B-TO-B CONN. HGT=1.0 REC ASSY EMBSTP PKG		
			10 OVER 30 UNDER ± ---		CHECKED BY DATE MSASAO 2007/10/03				
			30 OVER ± ---		APPROVED BY DATE MSASAO 2007/10/03		MOLEX MOLEX INCORPORATED		
			ANGULAR ± --- °		MATERIAL NO.				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-502426-002		1 OF 4
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

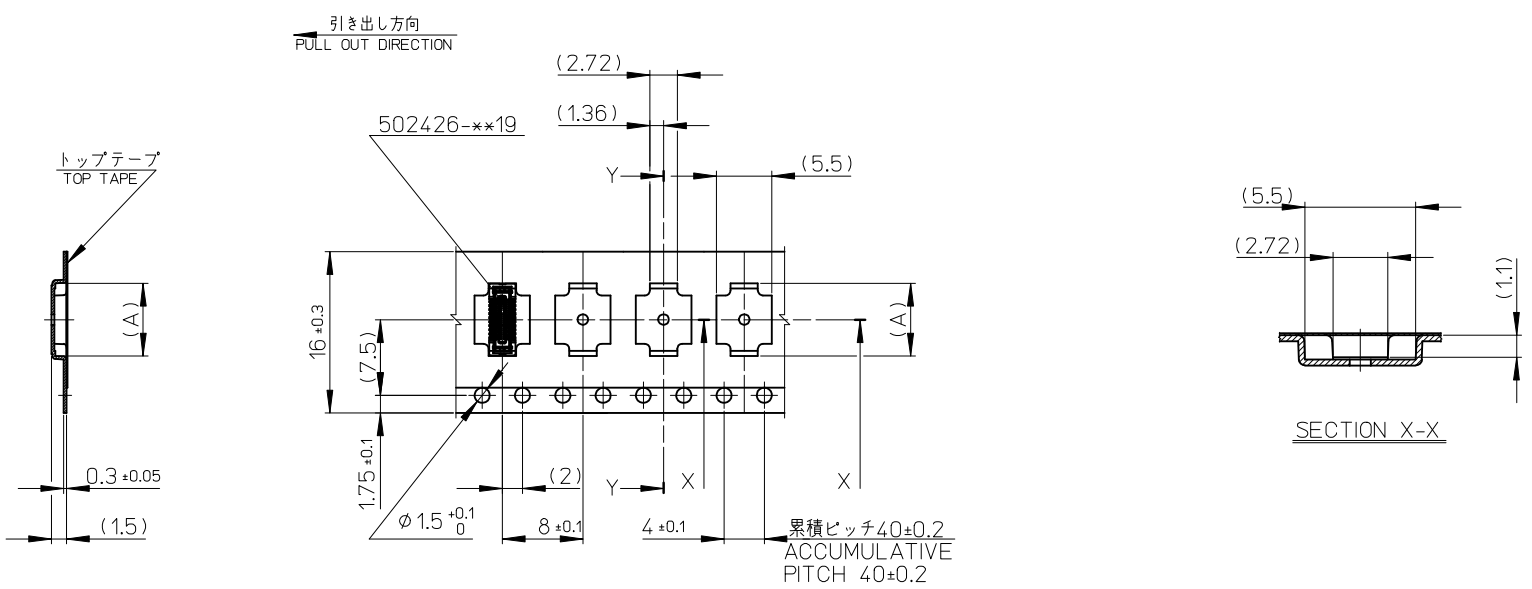

SECTION Y-Y

SECTION X-X

16mm 幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	21.4	17.4	8.42	502426-2610		26
			7.62	502426-2210		22
			7.22	502426-2010		20
			6.02	502426-1410		14
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL No.		CKT.
				MODEL No.	502426-**10	

REVISED

EC NO: J2009-0819

DRWN: YAOYAGI

CHKD: YUASEGAWA

APPR: NUKITA

2009/01/21

2009/02/18

2009/02/18

DESCRIPTION

REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER ± ---

10 OVER 30 UNDER ± ---

30 OVER ± ---

ANGULAR ± --- °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY RTAKEUCHI

CHECKED BY MSASAO

APPROVED BY MSASAO

DATE 2007/10/03

DATE 2007/10/03

DATE 2007/10/03

MATERIAL NO.

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

TITLE
0.4 B-TO-B CONN. HGT=1.0
REC ASSY EMBSTP PKG

MOLEX INCORPORATED

DOCUMENT NO.
SD-502426-002

SHEET NO.
2 OF 4

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D

C

B

A

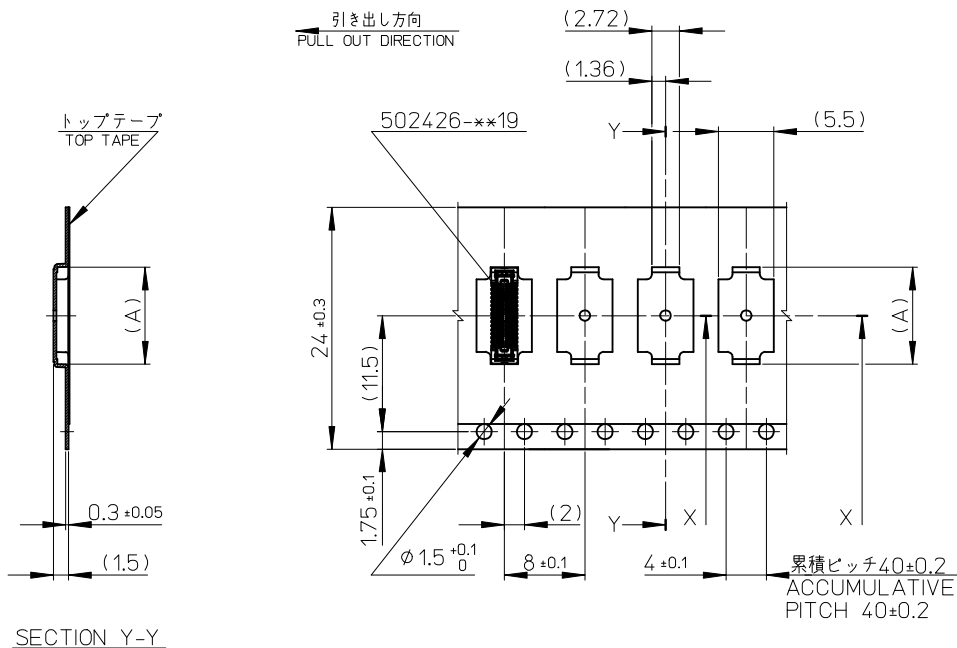

24mm 幅キャリアテープ
24mm WIDTH CARRIER TAPE

24	29.4	25.4	16.02	502426-6410		64
			15.22	502426-6010		60
			13.22	502426-5010		50
			12.02	502426-4410		44
			11.22	502426-4010		40
			9.62	502426-3210		32
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL No.		CKT.
				MODEL No.	502426-**10	

REVISED EC NO: J2009-0819 DRWN:YAOYAGI CHKD:YUASEGAWA APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	± ---	DRAWN BY RTAKEUCHI	DATE 2007/10/03	TITLE 0.4 B-TO-B CONN. HGT=1.0 REC ASSY EMBSTP PKG		
		10 OVER 30 UNDER	± ---	CHECKED BY MSASAO	DATE 2007/10/03			
		30 OVER	± ---	APPROVED BY MSASAO	DATE 2007/10/03	 MOLEX INCORPORATED		
		ANGULAR	± --- °	MATERIAL NO.				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-502426-002		
REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10

9

8

7

6

5

4

3

2

1

F



E

D

C

B

A

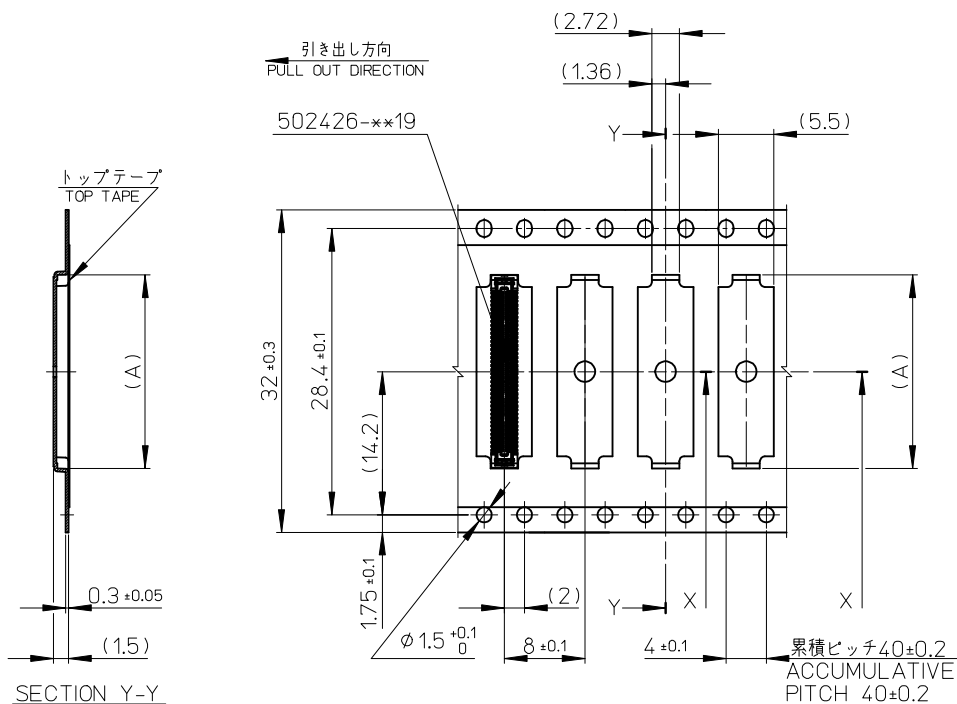

32mm 幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	37.4	33.4	19.22	502426-8010	80
キャリアテープ幅 CARRIER TAPE WIDTH		C	B	(A)	MODEL No. 502426-**10

REVISED EC NO.: J2009-0819 DRWN: YAOYAGI CHKD: YUASEGAWA APPR: NUKITA 2009/01/21 2009/02/18 2009/02/18	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER ± ---		DRAWN BY DATE RTAKEUCHI 2007/10/03		TITLE 0.4 B-TO-B CONN. HGT=1.0 REC ASSY EMBSTP PKG			
		10 OVER 30 UNDER ± ---		CHECKED BY DATE MSASAO 2007/10/03					
		30 OVER ± ---		APPROVED BY DATE MSASAO 2007/10/03		MOLEX MOLEX INCORPORATED			
		ANGULAR ± --- °		MATERIAL NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-502426-002		4 OF 4	
		REV		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9

8

7

6

5

4

3

2