




DIMENSIONS

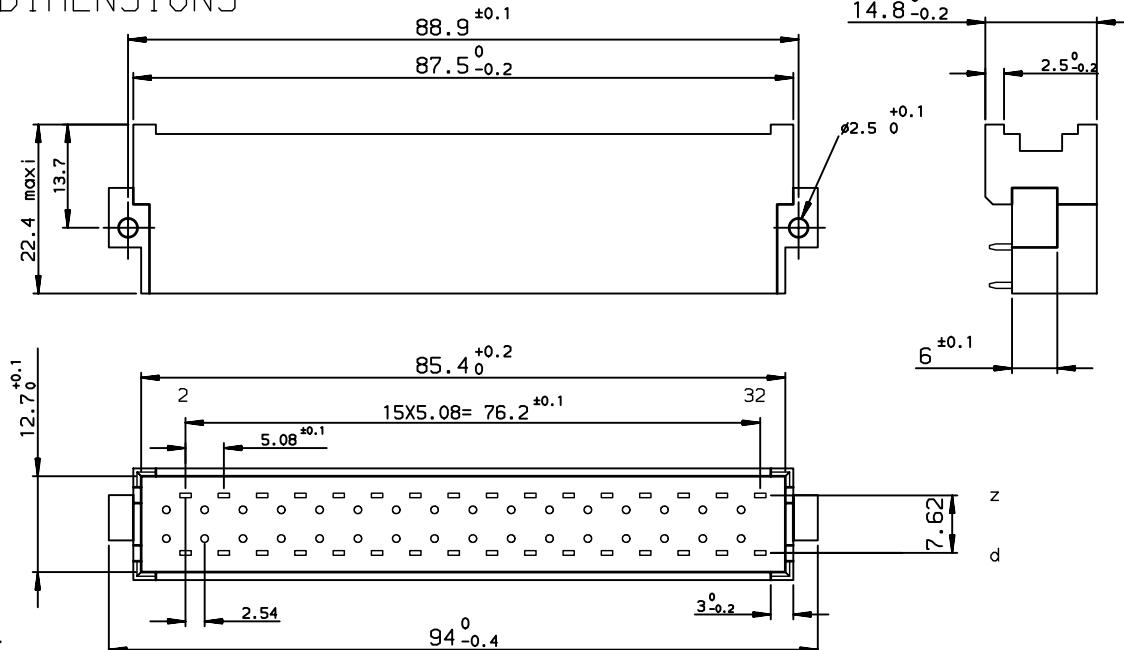

TERMINATION

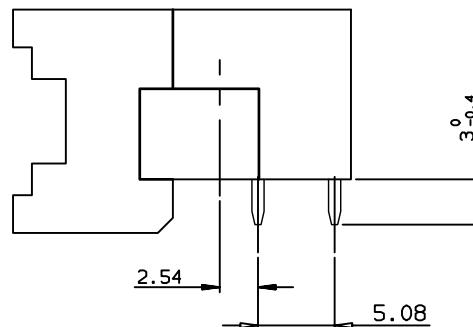

P. C. CARD DRILLING

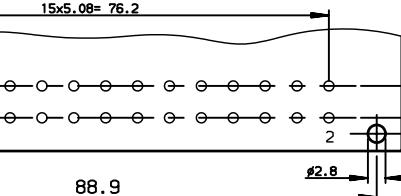

ELECTRICAL DATA

- Current at AMB. 5.5 A at 20° / 4 A at 70°
 - Contact resistance <15mA according to DIN 41640 Teil 4 test 2a
 - Insulation resistance $\geq 10 \text{ M}\Omega$ according to DIN 41640 teil 7 test 3a
 - TEST VOLTAGE according to DIN 41640 teil 21
 contact/contact 1550 V
 contact/ground 2500 V

MECHANICAL DATA

- Insertion force $\leq 75\text{N}$
 - Mechanical endurance 400 matings unmatings according to DIN41640 teil 21
 - Material insulator Polycarbonate UL94V0
 - Material contacts Bronze
 - Finishing contact surface Gold over nickel Lead Free
 - Finishing termination Lead-Free
 - Shock $\leq 30\text{mA}$ according to DIN 41640 Teil 14 test 6c
 - Vibration 10-500Hz/5g according to DIN 41640 Teil 15

ENVIRONMENTAL DATA

- Climatic category According to DIN 41612 - class 2
 - Corrosion According to DIN 41612 - class 2

PERFORMANCES AS PER DIN 41612 STYLE F CLASS 2

NOTE RoHS INFORMATION

- The "LF" products meet European Union Directives and other country regulations as described in GS-22-008.
- The housing will withstand exposure to 260°C peak temperature for 3.5 seconds in a wave solder application with a 1.6mm minimum thick circuit board.
- For the right angled versions, like the current lead versions, it's recommended to use high temperature adhesive or metallic device, to protect the nearest plastic part in contact with of the solder wave, to avoid any visual plastic deterioration.

LEAD-FREE PART-NUMBER

5159009326354101LF

European Views

www.fciconnect.com				surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	
				TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	PESSON	2006/02/22	ANGULAR	LINEAR	0.X	± 0.1	size A3
Eng	PESSON	2006/02/22	LINEAR		0.XX	± 0.1	
Chr	LEGARE	2006/02/22	0.XX $\pm 2^\circ$		0.XXX	± 0.1	ECN LS07-0288
Appr	LEGARE	2006/02/22	Product family DIN POWER		Spec ref	-	
FCI				MALE CONNECTOR 2 ROW 32 CONTACTS			
				catalog no -			
				dig no C01-5159-0016			
				Rev. E			
				CUSTOMER sheet 1 of 1			