
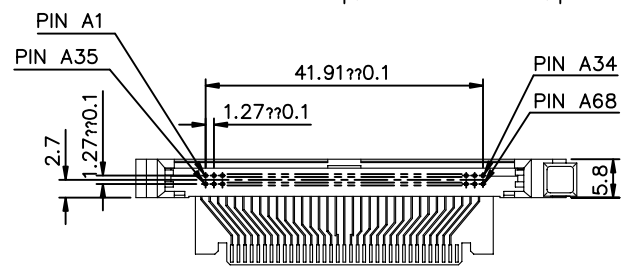
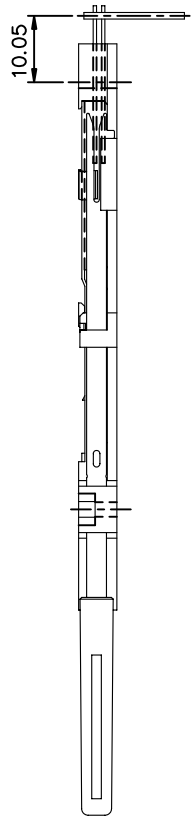


Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
Droits de reproduction BERG ELECTRONICS by

All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.
Copyright BERG ELECTRONICS by

PRODUCT NO.
52224-055HA
52224-055HALF

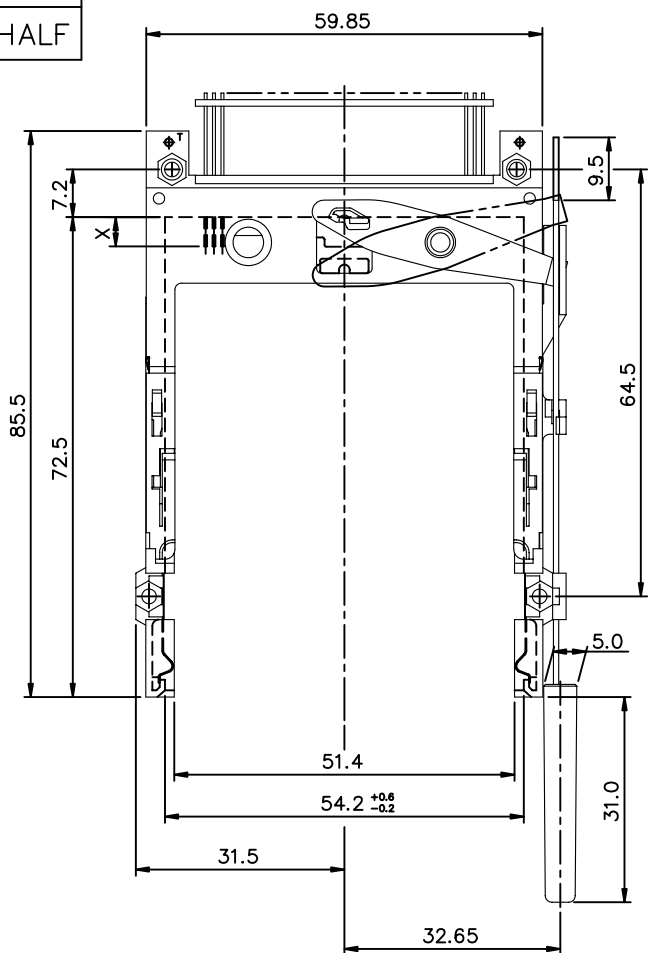



NOTES:

- 8mm MIN. CARD EJECT.
- EJECT TRAVEL: 9.5mm
- MATERIAL
 - HEADER ASS'Y
PLASTIC : HOUSING ...LCP UL94V-O BLACK
PIN : PHOSPHOR BRONZE
PCB : FR4
 - EJECT MECHANISM ASS'Y
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-O BLACK
: PUSH BUTTON: POLYPHTHARAMID UL94V-O BLACK

PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
UNDER PLATING : 0.5 um MIN. Ni
CONTACT AREA : 0.1 um MIN. GOLD OVER
0.5 um MIN. Pd-Ni
SOLDER TAIL : 2.5 um MIN. Sn-Pb (TIN LEAD OPTION)
SOLDER TAIL : 2.5 um MIN. PURE TIN (LEAD FREE OPTION)
- PUSH ROD LOCATION AND P.C.B. SIDE ARE AS APPEARS INSTALLED.
- DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68



- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
rev.	ecn no.	dr	date	linear	± 0.30	projection		title EJECTOR HEADER ASS'Y 68POS. FOR TYP 1/2/3	
A	T90060	WL	02/10/99						
B	T20166	WL	05/30/02	angles	± 2°			product family PCMCIA code	
C	N05-0119	WB	04/27/05						
		dr	WENDY CHEN	02/02/99	unit	mm/inch		size dwg no.	
		enrg	LEIF SHEN	02/02/99	scale	A3		52224	
		chr	JOSEPH HSIA	02/02/99					
		appd	JENN TSAO	02/02/99				sheet 1 OF 4	
sheet	revision	C	B	B	B				
index	sheet	1	2	3	4				

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
Droits de reproduction BERG ELECTRONICS by

All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.
Copyright BERG ELECTRONICS by

PRODUCT NO.
52224-050HA
52224-050HALF

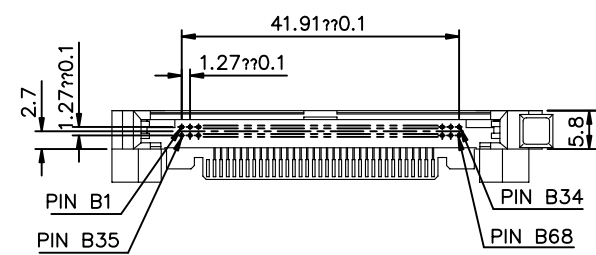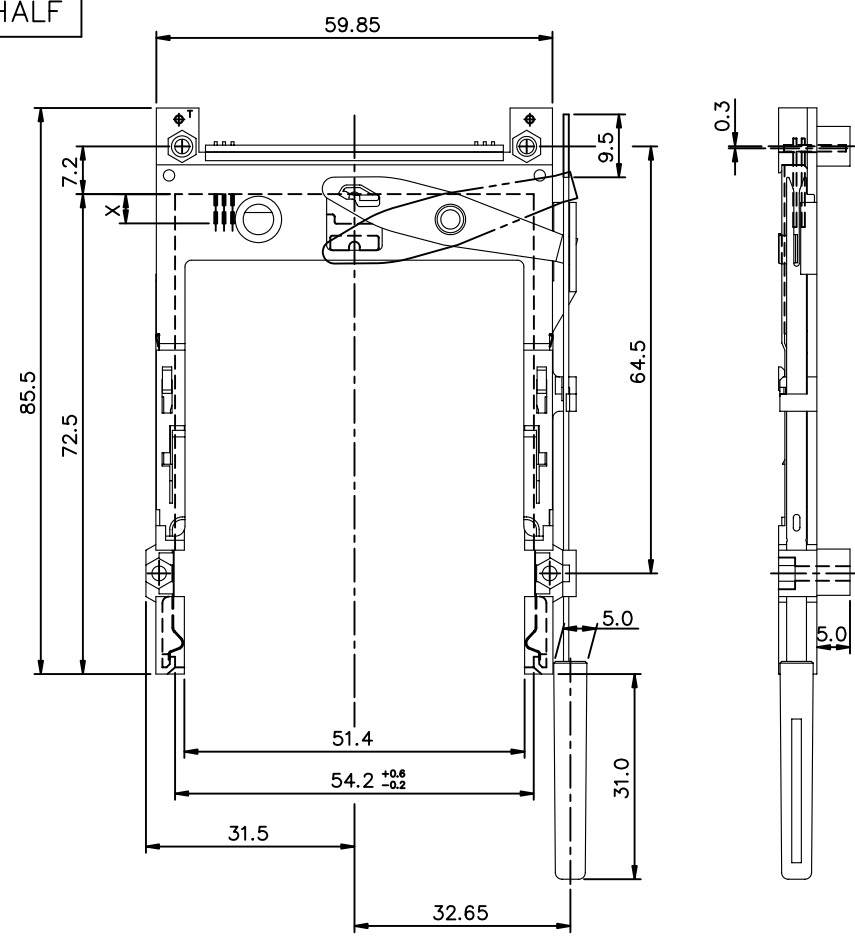

- NOTES:
- 8mm MIN. CARD EJECT.
 - EJECT TRAVEL: 9.5mm
 - MATERIAL
 - HEADER ASS'Y
PLASTIC : HOUSING ...LCP UL94V-O BLACK
PIN : PHOSPHOR BRONZE
PCB : FR4
 - EJECT MECHANISM ASS'Y
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-O BLACK
: PUSH BUTTON: POLYPHTHARAMID UL94V-O BLACK

PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
 - FINISH (PIN)
UNDER PLATING : 0.5 um MIN. Ni
CONTACT AREA : 0.1 um MIN. GOLD OVER
0.5 um MIN. Pd-Ni
SOLDER TAIL : 2.5 um MIN. Sn-Pb (TIN LEAD OPTION)
SOLDER TAIL : 2.5 um MIN. PURE TIN (LEAD FREE OPTION)
 - PUSH ROD LOCATION AND P.C.B. SIDE ARE AS APPEARS INSTALLED.
 - DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68

- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION


mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com		
rev.	ecn no.	dr	date	linear	± 0.30		projection 	title EJECTOR HEADER ASS'Y 68POS. FOR TYP 1/2/3		
C										
				angles	± 2°					
		dr	WENDY CHEN	02/02/99	unit	mm/inch		product family	PCMCIA	code
		enr	LEIF SHEN	02/02/99				size	dwg no.	sheet 2 OF
		chr	JOSEPH HSIA	02/02/99	scale	1.2:1		A3	52224	
		appd	JENN TSAO	02/02/99						
sheet	revision									
index	sheet									

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.
Copyright BERG ELECTRONICS bv

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.
Copyright BERG ELECTRONICS bv

PRODUCT NO.
52224-125JA
52224-125JALF

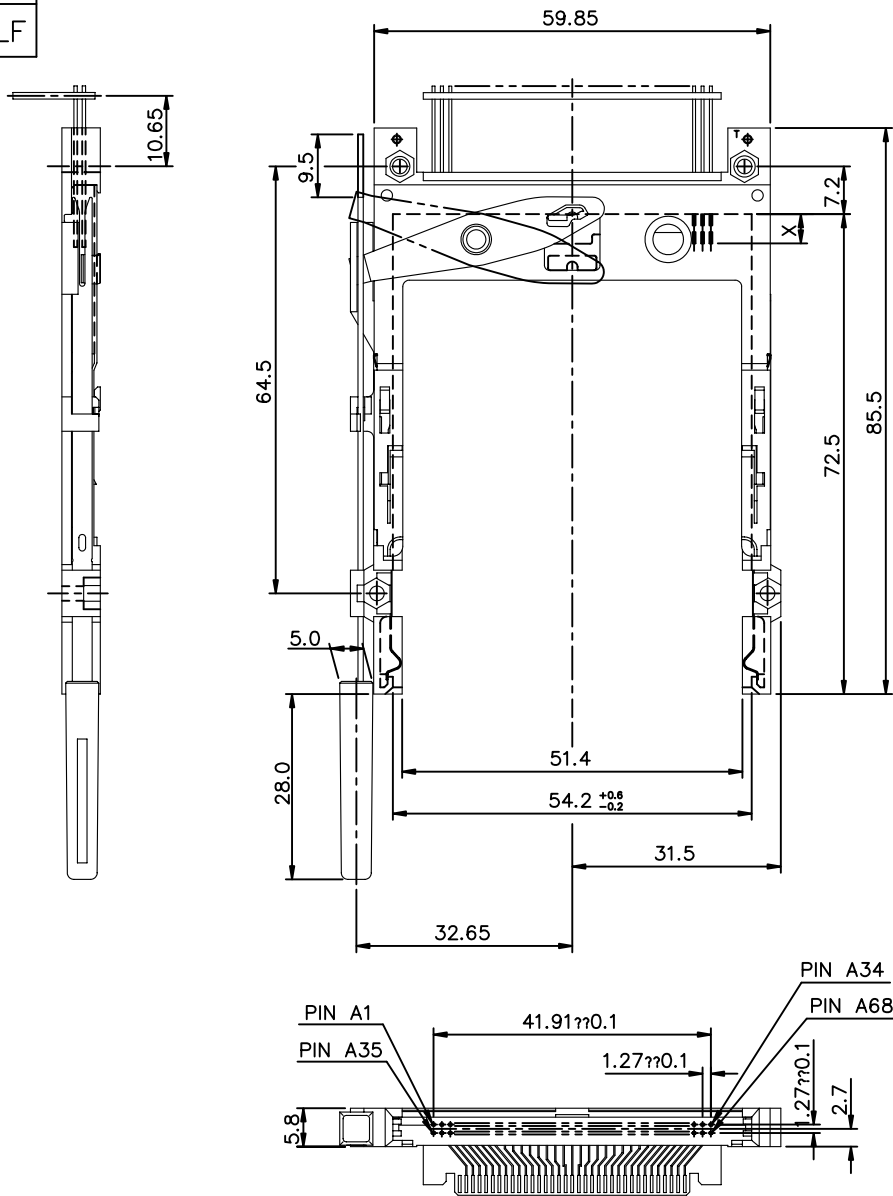

NOTES:




- 8mm MIN. CARD EJECT.
 - EJECT TRAVEL: 9.5mm
 - MATERIAL
 - HEADER ASS'Y
PLASTIC : HOUSING ...LCP UL94V-O BLACK
PIN : PHOSPHOR BRONZE
PCB : FR4
 - EJECT MECHANISM ASS'Y
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-O BLACK
: PUSH BUTTON: POLYPHTHARAMID UL94V-O BLACK
PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
 - FINISH (PIN)
UNDER PLATING : 0.5 um MIN. Ni
CONTACT AREA : 0.1 um MIN. GOLD OVER
0.5 um MIN. Pd-Ni
SOLDER TAIL : 2.5 um MIN. Sn-Pb (TIN LEAD OPTION)
SOLDER TAIL : 2.5 um MIN. PURE TIN (LEAD FREE OPTION)
 - PUSH ROD LOCATION AND P.C.B. SIDE ARE AS APPEARS INSTALLED.
 - DIM "X"
- | | | |
|----------|---------|------------------|
| 4.25±0.1 | 3.5±0.1 | 5.0±0.1 |
| OTHERS | 36,67 | 1,17,34,35,51,68 |
- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
 - LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION

mat'l code		tolerance unless otherwise specified		CUSTOMER COPY		A FCI www.fciconnect.com	
rev.	ecn no.	dr	date	linear	± 0.30	projection	title
C				angles	± 2°		EJECTOR HEADER ASS'Y 68POS. FOR TYP 1/2/3
		dr	WENDY CHEN	02/02/99	unit	product family	PCMCIA
		enr	LEIF SHEN	02/02/99	mm/inch	code	
		chr	JOSEPH HSIA	02/02/99	scale	size	dwg no.
		appd	JENN TSAO	02/02/99	1.2:1	A3	52224
sheet	revision						sheet
index	sheet						3 OF

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire.
Droits de reproduction BERG ELECTRONICS bv

All rights strictly reserved. Reproduction or issue to third parties in any form without written authority from the proprietor.
Copyright BERG ELECTRONICS bv

PRODUCT NO.
52224-120JA
52224-120JALF

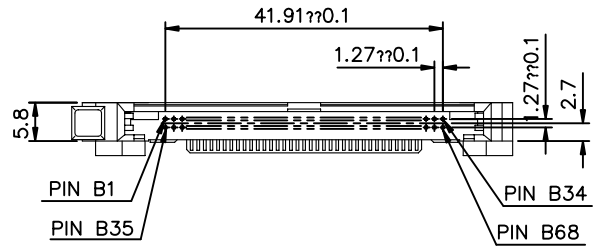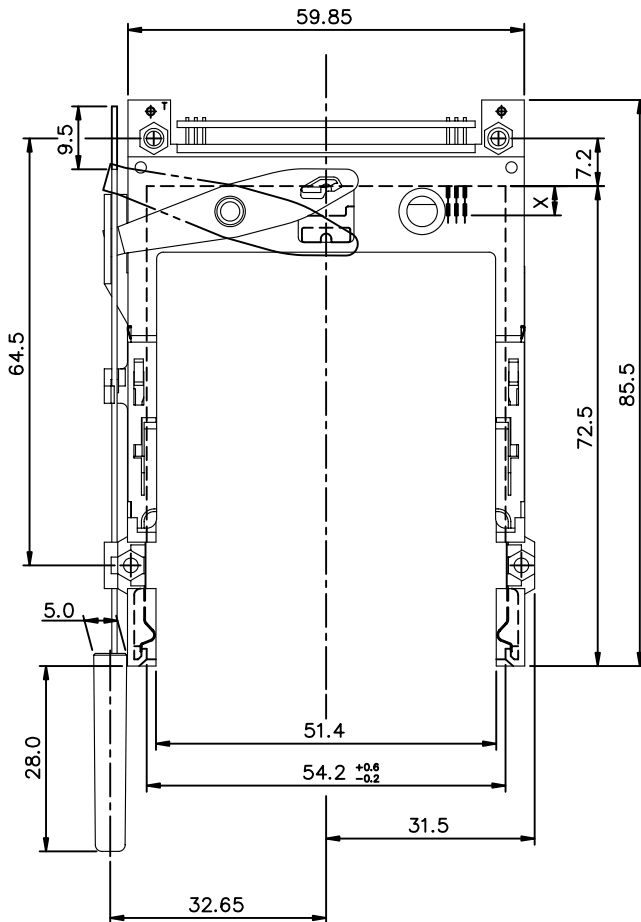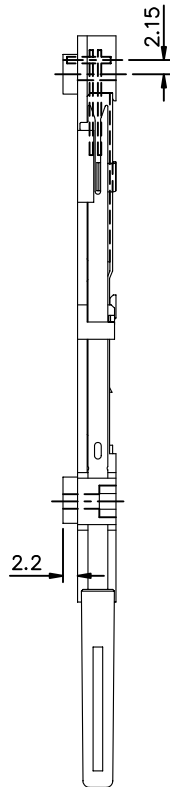

NOTES:

- 8mm MIN. CARD EJECT.
- EJECT TRAVEL: 9.5mm
- MATERIAL
 - HEADER ASS'Y
PLASTIC : HOUSING ...LCP UL94V-O BLACK
PIN : PHOSPHOR BRONZE
PCB : FR4
 - EJECT MECHANISM ASS'Y
PLASTIC : GUIDE: POLYPHTHARAMID UL94V-O BLACK
: PUSH BUTTON: POLYPHTHARAMID UL94V-O BLACK

PLATE : STAINLESS
EMI CONTACT: PHOSPHOR BRONZE
- FINISH (PIN)
UNDER PLATING : 0.5 um MIN. Ni
CONTACT AREA : 0.1 um MIN. GOLD OVER
0.5 um MIN. Pd-Ni
SOLDER TAIL : 2.5 um MIN. Sn-Pb (TIN LEAD OPTION)
SOLDER TAIL : 2.5 um MIN. PURE TIN (LEAD FREE OPTION)
- PUSH ROD LOCATION AND P.C.B. SIDE ARE AS APPEARS INSTALLED.
- DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68
- IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		www.fciconnect.com	
rev.	ecn	no.	dr	date	linear	± 0.30	projection	title	
C								EJECTOR HEADER ASS'Y	
					angles	± 2°		68POS. FOR TYP 1/2/3	
			dr	WENDY CHEN	02/02/99	unit		product family	PCMCIA
			enr	LEIF SHEN	02/02/99	mm/inch		code	
			chr	JOSEPH HSIA	02/02/99	scale		size	dwg no.
			appd	JENN TSAO	02/02/99	1.2:1	A3	52224	sheet 4 OF
sheet	revision								
index	sheet								