
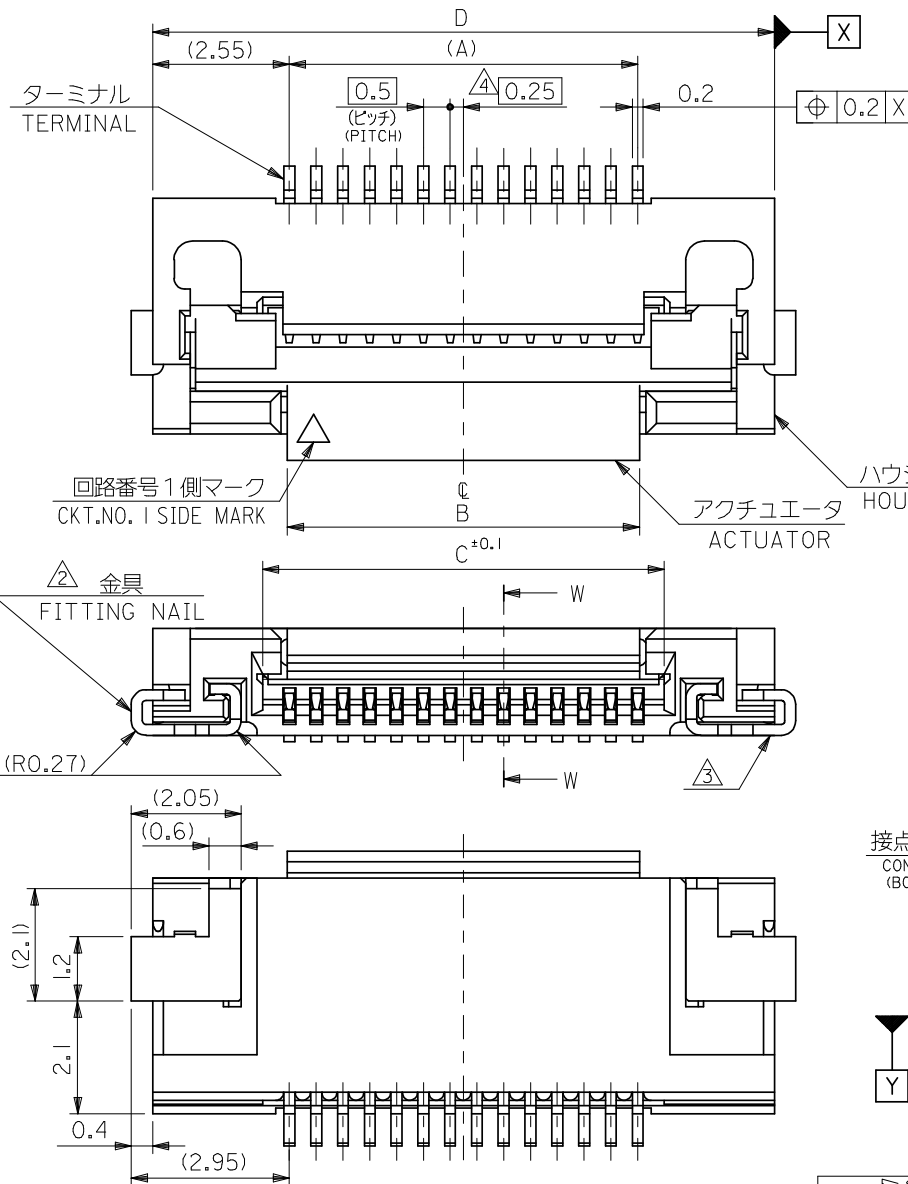


アクチュエータを開口した状態
WHEN ACTUATOR IS OPEN

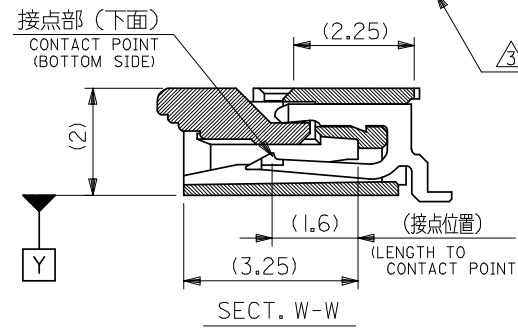

注記 NOTES

1. 使用材料 MATERIAL

ハウジング : 46ナイロン, UL94V-0
HOUSING : 46NYLON

アクチュエータ : PPS, UL94V-0
ACTUATOR

ターミナル : リン青銅 (t=0.2), ニッケル下地錫ビスマスメッキ
TERMINAL : PHOS-BRO, TIN-BISMUTH OVER NICKEL PLATED

金具 : リン青銅 (t=0.2), ニッケル下地錫メッキ
FITTING NAIL : PHOS-BRO, TIN OVER NICKEL PLATED

△ パターンはくり止め用金具
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.

△ ソルダータール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面 Y
に対し上方向 0.05 MAX. 下方向 0.2 MAX. とする。
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM Y
UPPER DIRECTION: 0.05 MAX., LOWER DIRECTION: 0.2 MAX.


△ 偶数極に適用。

APPLY FOR EVEN CIRCUIT.

5. 本製品は52892-**-17の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52892-**-17

19.6	15.5	14.57	14.5	52892-3095	52892-3019	30
18.6	14.5	13.57	13.5	-2895	-2819	28
17.6	13.5	12.57	12.5	-2695	-2619	26
16.6	12.5	11.57	11.5	-2495	-2419	24
15.6	11.5	10.57	10.5	-2295	-2219	22
14.6	10.5	9.57	9.5	-2095	-2019	20
14.1	10.0	9.07	9.0	-1995	-1919	19
13.6	9.5	8.57	8.5	-1895	-1819	18
13.1	9.0	8.07	8.0	-1795	-1719	17
12.6	8.5	7.57	7.5	-1695	-1619	16
12.1	8.0	7.07	7.0	-1595	-1519	15
11.6	7.5	6.57	6.5	-1495	-1419	14
11.1	7.0	6.07	6.0	-1395	-1319	13
10.6	6.5	5.57	5.5	-1295	-1219	12
10.1	6.0	5.07	5.0	-1195	-1119	11
9.6	5.5	4.57	4.5	-1095	-1019	10
8.6	4.5	3.57	3.5	52892-0895	52892-0819	8
D	C	B	(A)	EMBOSSD TAPE ORDER No. オーダー番号	MATERIAL NO.	極数 CIRCUIT

REVISED EC NO: J2008-4308 DRWN: NABEI CHKD: THARUYAMA APPR: NUKITA	DESCRIPTION 2008/06/27 2008/06/30 2008/06/30	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY M. NABEI	DATE 2004/01/09	TITLE 0.5 FPC CONN ASSY ZIF SMT RA(BTM CONT) E/O -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. SASAO	DATE 2004/01/09					
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 2004/01/09	MOLEX INCORPORATED				
		ANGULAR ±3 °	MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52892-040		1 OF 3			
B	REV	SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

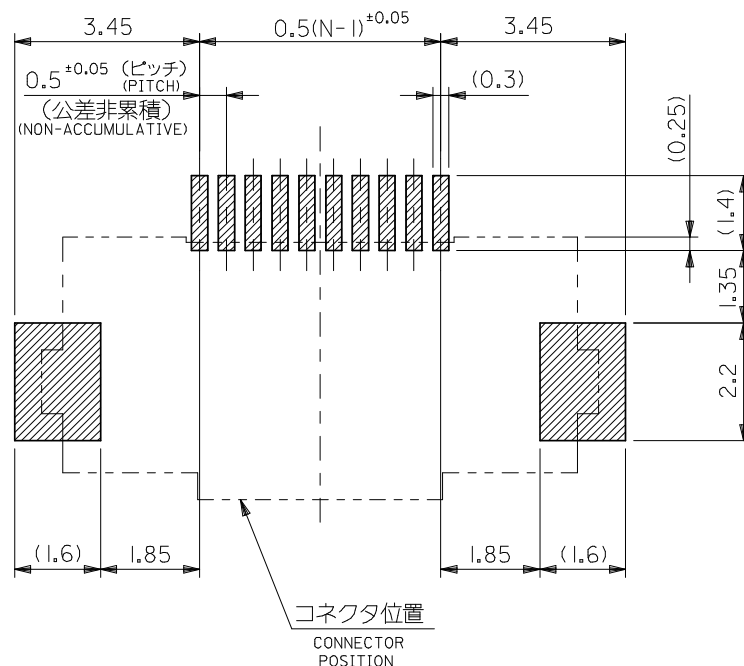


参考基板レイアウト
RECOMMENDED P.C.BOARD
PATTERN DIMENSION (REF.)


(マウント面)
(MOUNTING SIDE)

注記 NOTES

- △ R0. 3は、FPCの導体部にかからないこと。
R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.

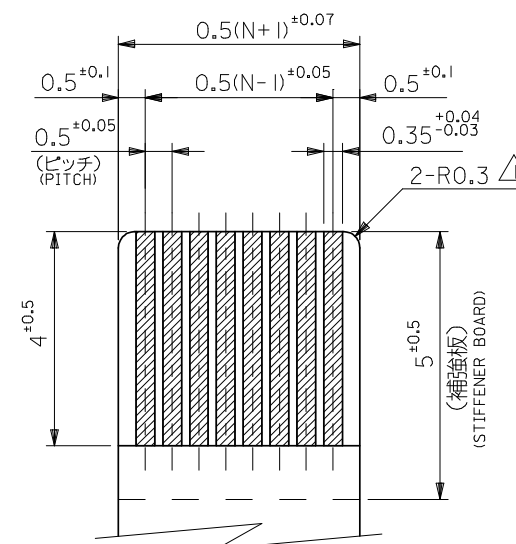

適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION
(仕上がり厚さ: $0.3^{+0.03}$)
(THICKNESS: $0.3^{+0.03}$)

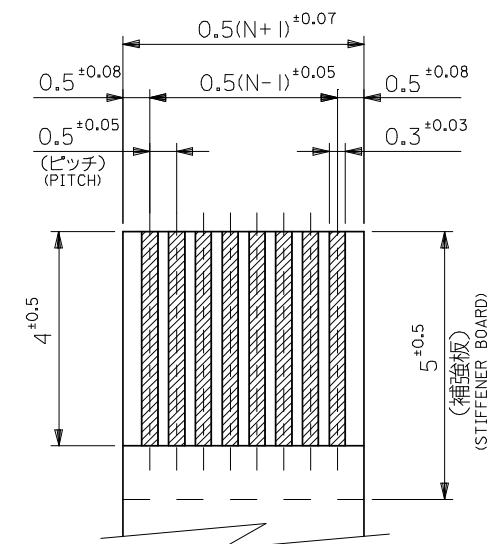

適合FFC推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION
(仕上がり厚さ: $0.3^{+0.03}$)
(THICKNESS: $0.3^{+0.03}$)

2. FPCについて：

打抜き方向は導体側から補強板側を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPCs

RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.

RECOMMENDED MATERIAL:

STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

REVISED EC NO: J2008-4308 DRWN: NABEI CH'KD: THARYAMA APPR: NUKITA	DESCRIPTION 2008/06/27 2008/06/30 2008/06/30	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER ± 0.2		DRAWN BY DATE M. NABEI 2004/01/09		TITLE 0.5 FPC CONN ASSY ZIF SMT RA(BTM CONT) E/O -LEAD FREE-			
		10 OVER 30 UNDER ± 0.25		CHECKED BY DATE M. SASAO 2004/01/09					
		30 OVER ± 0.3		APPROVED BY DATE M. SASAO 2004/01/09					
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1		SD-52892-040		2 OF 3	
	REV		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F

E

D

C

B

A

ターミナル
TERMINAL

回路番号1側マーク
CKT.NO. 1 SIDE MARK

金具
FITTING NAIL

ハウジング
HOUSING



アクチュエータ
ACTUATOR

金型変更に伴う形状変更品形状図


APPLY CHANGED FORM AT CHANGED DIE

注記 NOTES



△ 18極以上は2ヶ所、10～16極はハウジングセンター上に1ヶ所とする。
18 CKTS & MORE THAN 18 CKTS PLACED 2 POINT.
10 ~16 CKTS PLACED 1 POINT ON HOUSING CENTER.

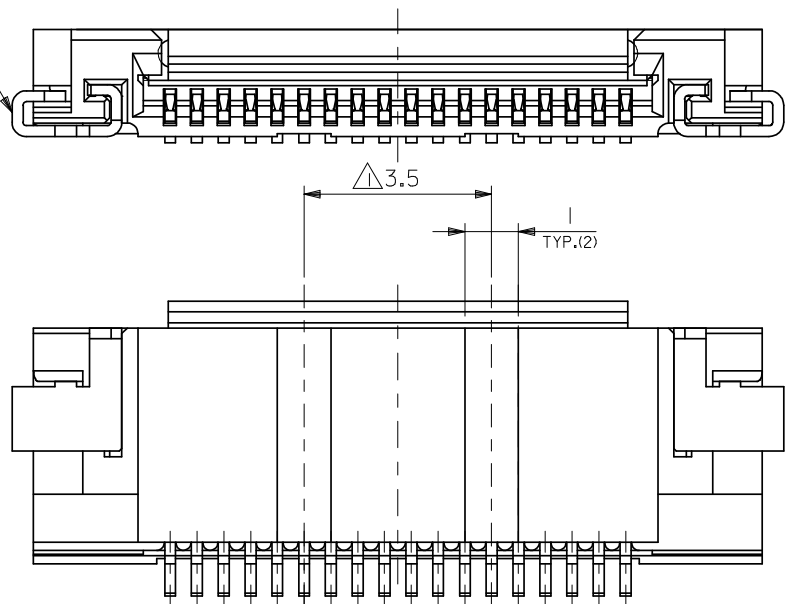

REVISED EC NO: J2008-4308 DRWN:NABEI CHKD:THARUYAMA APPR:NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		10 UNDER ±0.2		DRAWN BY DATE M. NABEI 2004/01/09		TITLE 0.5 FPC CONN ASSY ZIF SMT RA(BTM CONT) E/O -LEAD FREE-					
		10 OVER 30 UNDER ±0.25		CHECKED BY DATE M. SASAO 2004/01/09							
		30 OVER ±0.3		APPROVED BY DATE M. SASAO 2004/01/09		MOLEX MOLEX INCORPORATED					
		ANGULAR ±3 °		MATERIAL NO. SEE SHEET 1						DOCUMENT NO. SD-52892-040	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					




1. 製品詳細寸法については図面 SD-52892-040 を参照下さい。
RE DETAILED DIMENSION, SEE SD-52892-040
2. 梱包数量：1000個/リール
NUMBER OF CONNECTORS : 1000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

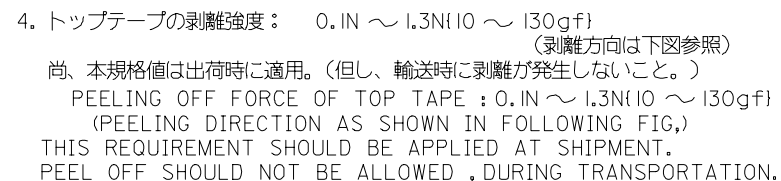

6.本製品は52892-**90の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52892-**90

tb_frame_A3_J_ME_S
Rev. D 2004/04/02

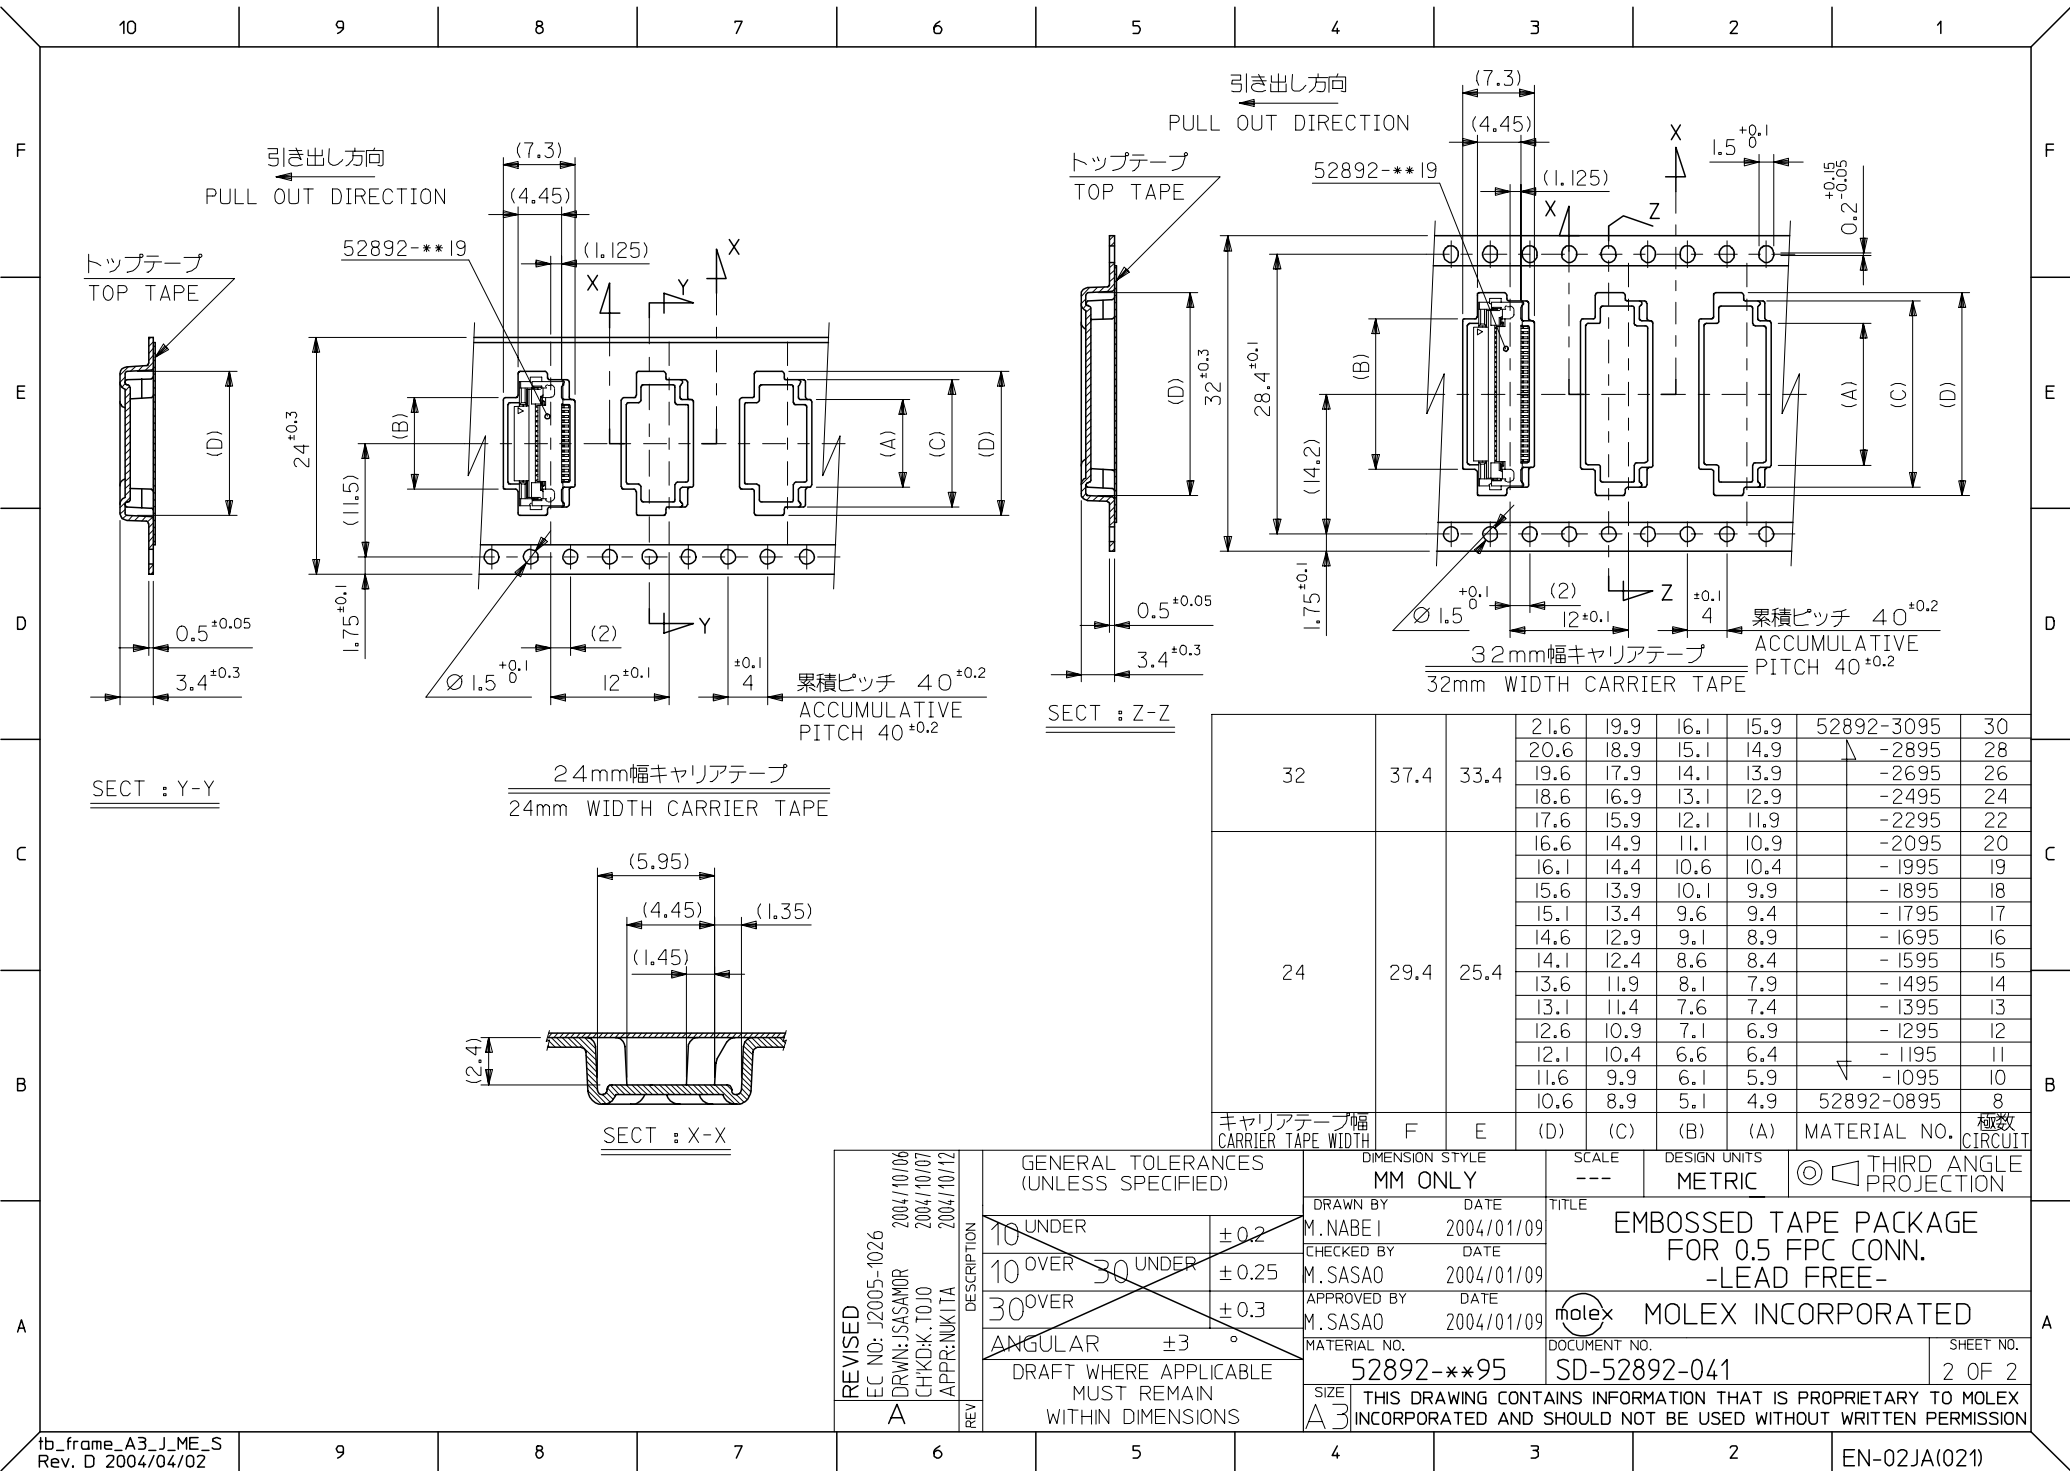

32	37.4	33.4	21.6	19.9	16.1	15.9	52892-3095	30
			20.6	18.9	15.1	14.9	-2895	28
			19.6	17.9	14.1	13.9	-2695	26
			18.6	16.9	13.1	12.9	-2495	24
			17.6	15.9	12.1	11.9	-2295	22
			16.6	14.9	11.1	10.9	-2095	20
			16.1	14.4	10.6	10.4	-1995	19
			15.6	13.9	10.1	9.9	-1895	18
			15.1	13.4	9.6	9.4	-1795	17
			14.6	12.9	9.1	8.9	-1695	16
24	29.4	25.4	14.1	12.4	8.6	8.4	-1595	15
			13.6	11.9	8.1	7.9	-1495	14
			13.1	11.4	7.6	7.4	-1395	13
			12.6	10.9	7.1	6.9	-1295	12
			12.1	10.4	6.6	6.4	-1195	11
			11.6	9.9	6.1	5.9	-1095	10
			10.6	8.9	5.1	4.9	52892-0895	8
			キャリアテープ幅 CARRIER TAPE WIDTH				MATERIAL NO.	極数 CIRCUIT
			F	E	(D)	(C)	(B)	(A)
			(D)	(C)	(B)	(A)	MATERIAL NO. 極数 CIRCUIT	

REVISED EC NO: J2005-1026 DRWN: ISASAMOR CHKD: TOJO APPR: NUKITA 2004/10/06 2004/10/07 2004/10/12	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER ±0.2		DRAWN BY DATE M.NABEI 2004/01/09		TITLE EMBOSSD TAPE PACKAGE FOR 0.5 FPC CONN. -LEAD FREE-				
		10 OVER 30 UNDER ±0.25		CHECKED BY DATE M.SASAO 2004/01/09						
		30 OVER ±0.3		APPROVED BY DATE M.SASAO 2004/01/09		MOLEX MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO. 52892-**95						DOCUMENT NO. SD-52892-041
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						