



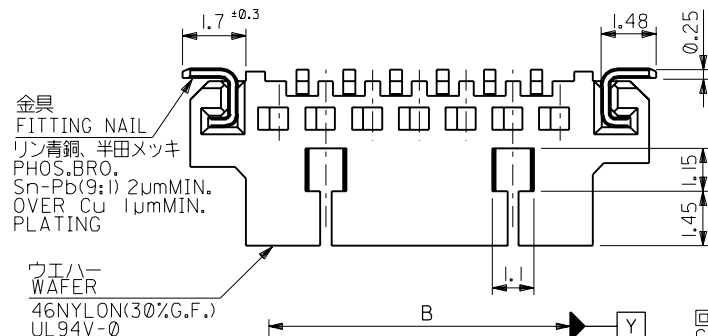

注記 NOTES

1. 嵌合相手: 51021 シリーズ MATE WITH: 51021 SERIES
- △ 水平面上においての、ウェハー底面 [W] とソルダーテール及びフィッティングネイル底面とのズレ量を示す。
MISALIGNMENT OF SOLDER TAIL & FITTING NAIL FROM [W]
- △ 偶数極にのみ適用。APPLY EVEN CIRCUIT PRODUCTS.
- △ ロック窓は、2、3極は1ヶ所、4極以上は2ヶ所とする。
LOCKING WINDOW: ONE PLACE FOR 2&3 CKTS.
TWO PLACES FOR MORE THAN 4 CKTS.

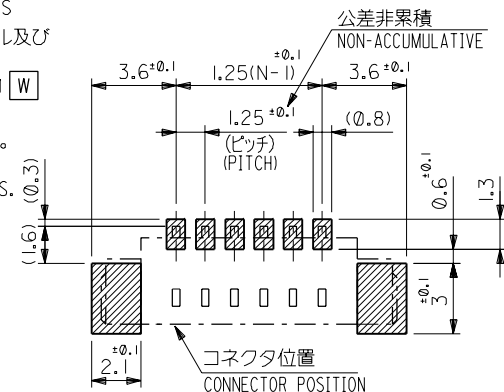

23.9	23.5	20.5	18.6	19.3	17.5	53398-1510	15
22.65	22.25	19.25	17.35	18.05	16.25	-1410	14
21.4	21	18	16.1	16.8	15	-1310	13
20.15	19.75	16.75	14.85	15.55	13.75	-1210	12
18.9	18.5	15.5	13.6	14.3	12.5	-1110	11
17.65	17.25	14.25	12.35	13.05	11.25	-1010	10
16.4	16	13	11.1	11.8	10	-0910	9
15.15	14.75	11.75	9.85	10.55	8.75	-0810	8
13.9	13.5	10.5	8.6	9.3	7.5	-0710	7
12.65	12.25	9.25	7.35	8.05	6.25	-0610	6
11.4	11	8	6.1	6.8	5	-0510	5
10.15	9.75	6.75	4.85	5.55	3.75	-0410	4
8.9	8.5	5.5	3.6	4.3	2.5	-0310	3
7.65	7.25	4.25	2.35	3.05	1.25	53398-0210	2
F	E	D	C	B	A	ENG. NO.	極数 NO. OF CKTS.

F	変更 REVISED	WC2000-0636	K.K.	00/3/30
E	変更 REVISED	WC800-08	H.J.	91/7/5
D	変更 REVISED	U31030	H.H.	93/10/13
C	変更 REVISED	U30753	K.T.	93/7/29
B	変更 REVISED	U30610	K.T.	93/6/18
A	変更 REVISED	U30230	K.T.	93/3/10
0	新規作成 RELEASED	U20942	K.T.	92/10/12
角 度	ANGLE	+3°		
30°以上 OVER		+0.3		
10°以上 30°未満 OVER		+0.25		
10°未満 未過 UNDER		+0.2		
角 度	ANGLE	+3°		
30°以上 OVER		+0.3		
10°以上 30°未満 OVER		+0.25		
10°未満 未過 UNDER		+0.2		
角 度	ANGLE	+3°		
30°以上 OVER		+0.3		
10°以上 30°未満 OVER		+0.25		
10°未満 未過 UNDER		+0.2		
角 度	ANGLE	+3°		
30°以上 OVER		+0.3		
10°以上 30°未満 OVER		+0.25		
10°未満 未過 UNDER		+0.2		

