


5365 Series T-1 Right Angle 2 Wide LED Assembly

DESCRIPTION AND FEATURES

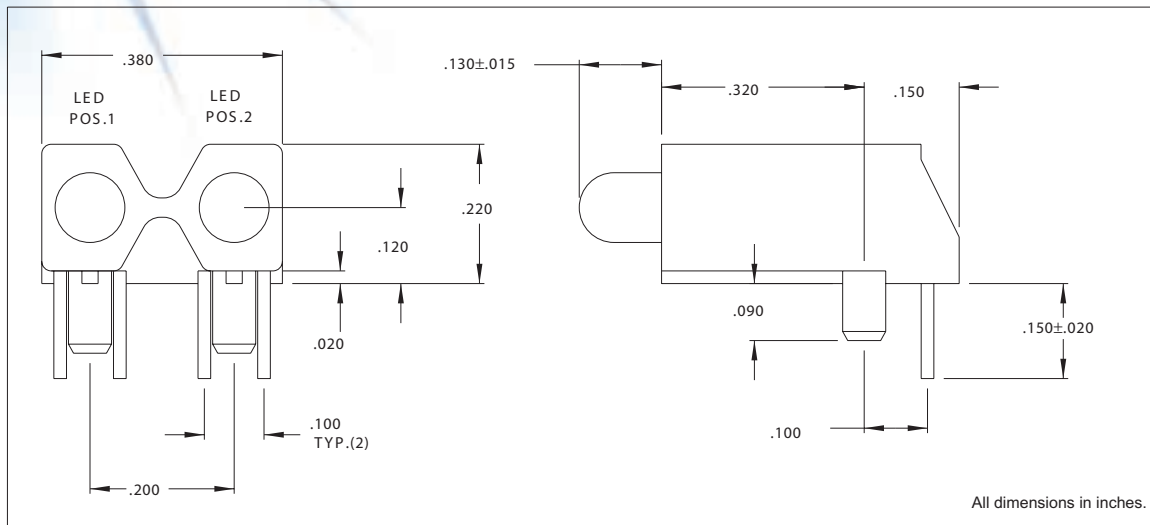

Features

- 2 T-1 LEDs mounted in single block.
- Height and spacing alignment saves assembly cost.

Housing: Black Nylon, UL94V-0

Note: Alternate LEDs are also available in this package as a standard variation.

Mounting hole pattern on page 1-X7.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

Part Number	E mitted Color	Typical Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage		Reverse Breakdown Voltage Min. (V)	Peak Wavelength (nm)	Peak Forward Current at 1MS-300 PPS (A)
					Typ. (V)	Max. (V)			
5365F1;1	Red/Red	10	10	30	2.0	3.0	5	650	.1
5365F5;5	Green/Green	16	10	30	2.2	3.0	5	562	.09
5365F7;7	Yellow/Yellow	6.3	10	30	2.1	3.0	5	585	.1