



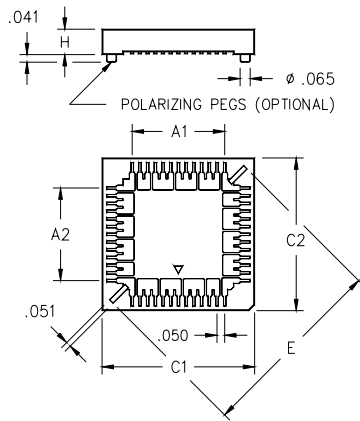


- Note: End stackable.
- Designed for JEDEC type devices.
- Open frame design in solder area improves results of IR soldering and facilitates visual inspection of solder pads.
- The brown PPS (Ryton R-4) insulator has optional polarizing pegs (PP).
- PLCC chip extraction tool available, see page 96.

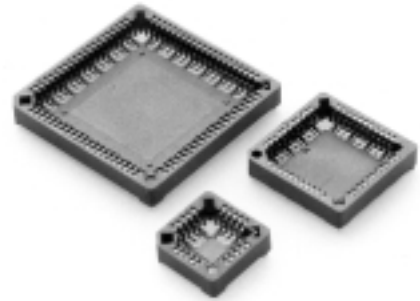

SURFACE MOUNT

PCB LAYOUT FOR SURFACE MOUNT

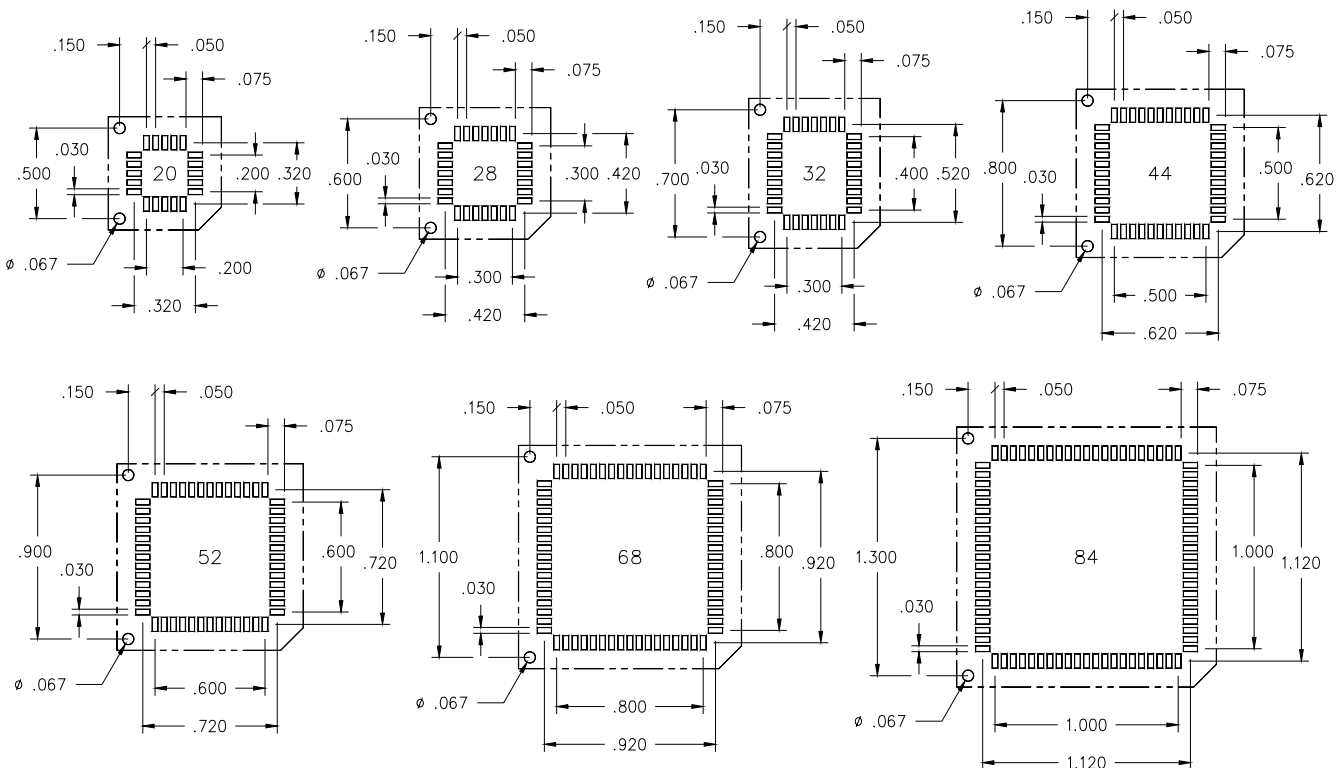

AVAILABLE PACKAGED IN TUBES OR ON TAPE AND REEL PER EIA-481

No. of Pins	ORDERING INFORMATION	A1	A2	C1	C2	E	H	Qty. per Tube	Tape Width mm	Qty. per Reel
20	540-99-020-17-400X0X	.200	.200	.585	.585	.657	.180	34	24	490
28	540-99-028-17-400X0X	.300	.300	.685	.685	.799	.180	29	32	400
32*	540-99-032-17-400X0X	.300	.400	.650	.766	.885	.168	26	32	400
44	540-99-044-17-400X0X	.500	.500	.885	.885	1.082	.180	22	44	250
52	540-99-052-17-400X0X	.600	.600	1.000	1.000	1.224	.180	20	44	250
68	540-99-068-17-400X0X	.800	.800	1.202	1.202	1.507	.180	16	44	250
84	540-99-084-17-400X0X	1.000	1.000	1.400	1.400	1.791	.180	14	56	250
X= 0 Without PP X= 0 Tube Packaged X= 2 With PP X= 4 Tape and Reel										

ALL SERIES 540 CONTACTS ARE PLATED TIN/LEAD. SEE PAGE 96 FOR TECHNICAL SPECIFICATIONS.