


THROUGH BOARD MOUNT




- Note: End stackable.
- Series 540 PLCC sockets are designed to accept JEDEC type MS-016 & MS-018 leaded plastic substrates.
- Body has polarizing features for both substrate and socket insertion.
- Contacts of highly reliable design safely hold the substrate in place by positive spring action.
- PLCC chip extraction tool available. See page 96.

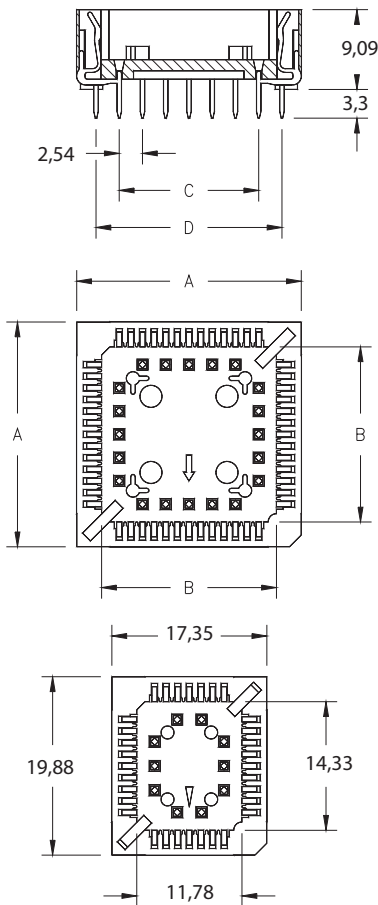

PRINTED CIRCUIT DRILLING PATTERNS (TOP VIEW)

0,76 dia. min. mounting holes

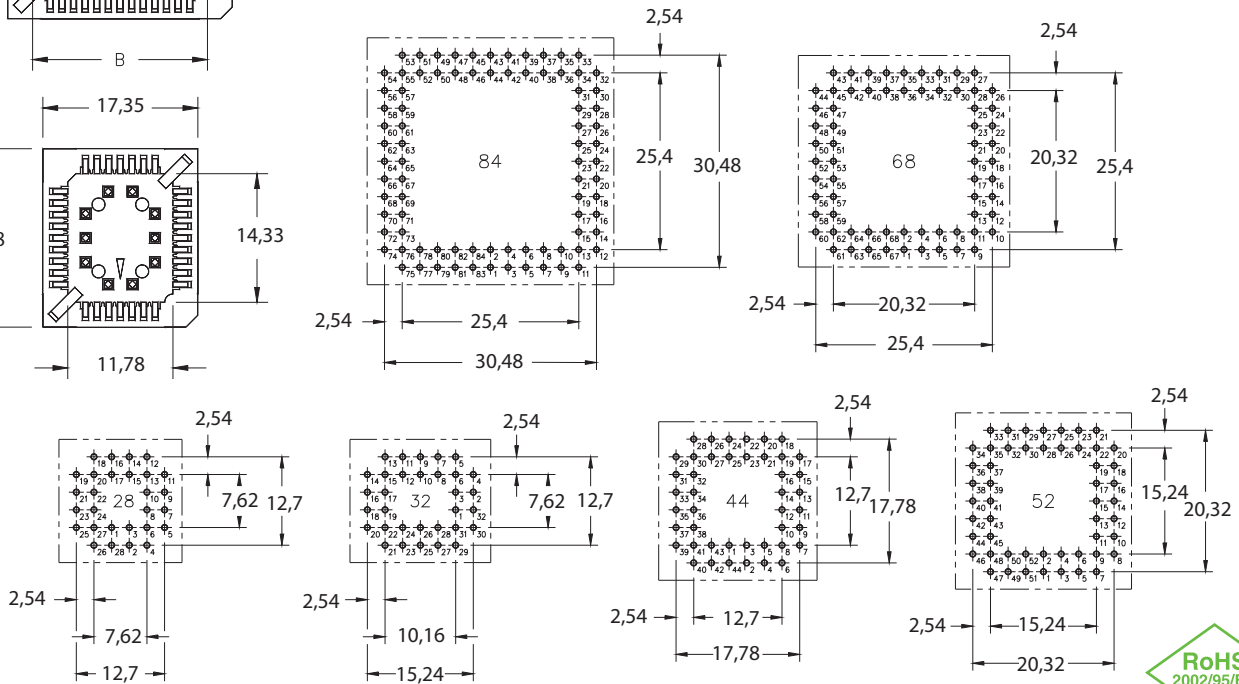

No. of Pins	ORDERING INFORMATION	- A -	- B -	- C -	- D -	Quantity per Tube
28	540-44-028-24-000000	17,53	11,68	7,62	12,7	29
32*	540-44-032-24-000000	19,9 / 17,3	14,3 / 11,8	10,2 / 7,62	15,2 / 12,7	25
44	540-44-044-24-000000	22,61	16,76	12,7	17,78	22
52	540-44-052-24-000000	25,15	19,3	15,24	20,32	20
68	540-44-068-24-000000	30,23	24,38	20,32	25,4	16
84	540-44-084-24-000000	35,31	29,46	25,4	30,48	14

Plating Code

*RECTANGULAR

44 = 3,81µm Sn ◇