



This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

PRODUCT NUMBER

55003-X 01 ZZZ LF

"LEAD FREE" (OPTIONAL)






SPECIAL LOAD PATTERN
SEE SHEET 4

SIZE (1 MOD)

PLATING PERFORMANCE
LEVEL, SEE SHEET 2

BASE NUMBER


MATING LENGTH
DIM A±0.20
SEE NOTE 12

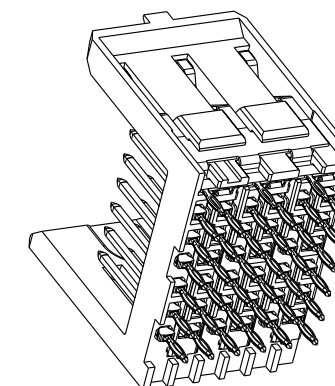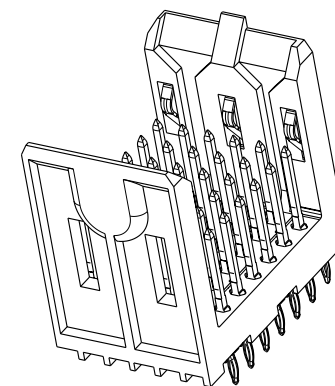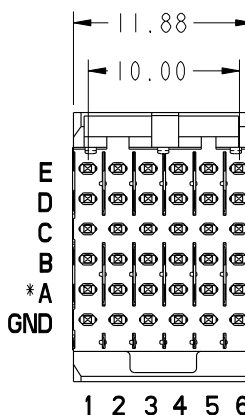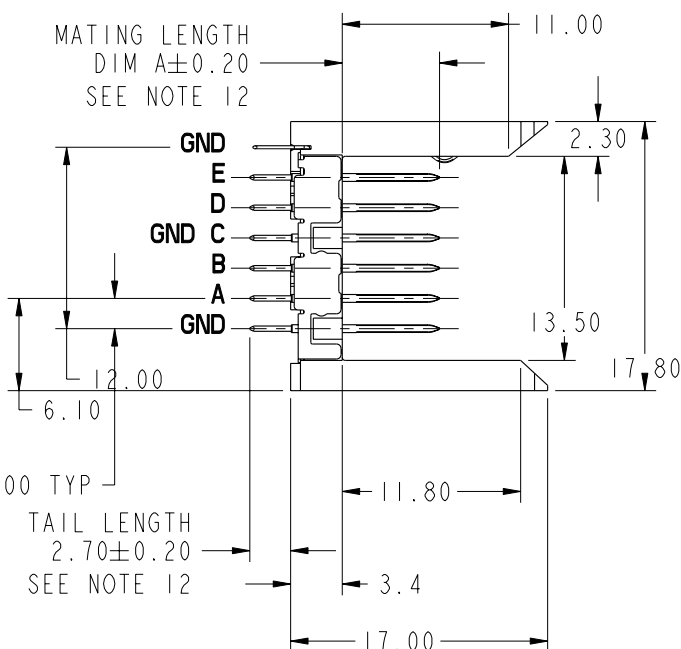

*ROW C INFORMATION

ODD NUMBER COLUMNS WITHIN ROW C ARE COMMONED
TO GROUND INTERNALLY WITHIN THE HOUSING. THE
EVEN NUMBER COLUMNS WITHIN ROW C ARE NOT.
FOR MAXIMUM PERFORMANCE IT IS RECOMMENDED THESE
EVEN COLUMNS BE GROUND COMMONED WITHIN PCB.

SEE NOTE 11

mat'l code SEE NOTE 3				tolerances unless otherwise specified			CUSTOMER		FCi www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3		projection 	title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SPECIAL LOAD STD	product family METRAL 4000	code 213
H	V06-0492	DCH	2006-05-23		0.XX ±0.13					
J	V07-0164	DCH	2007-03-02	.XXX ±.051						
K	V07-0686	HTB	2007-11-19	angles	0° ±2°					
L	V08-0039	HTB	2008-01-25		dr	E. KROPER.	2001-01-12	MM ←————→	size A	dwg no 55003
-	-	-	-	enrg	J. VOLSTROF	2001-01-12				
F	V05-0771	VS	2005-09-04	chr	J. VOLSTROF	2001-01-12	scale 1:1			
G	V06-0146	DAI	2006-02-21	appd	J. VOLSTROF	2001-01-12				
sheet index	revision sheet	L	L	L	L	L				
		1	2	3	4					

Pro/E

3

cage code 22526

4

PDM: Rev:L

STATUS:Released

Printed: Dec 16, 2008



PRODUCT NUMBER	PLATING PERFORMANCE LEVEL
55003-101ZZZ	TELCORDIA CO
55003-101ZZZLF	TELCORDIA CO
55003-501ZZZ	TELCORDIA UE
55003-501ZZZLF	TELCORDIA UE
55003-901ZZZ	TELCORDIA CO
55003-901ZZZLF	TELCORDIA CO



NOTES:

- SEE APPLICATION SPECIFICATION GS-20-014 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS. SEE PRODUCT SPECIFICATION GS-12-184.
- UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
- HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE
STRIPLINE SHIELD MATERIAL: PHOSPHOR BRONZE
- DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
FOR USE WITH METRAL 4000 RECEPTACLES.
DIM A : 5.00mm MIN, 6.50mm MAX FOR ROWS A,B,D,E
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS C
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROWS GND
FOR USE WITH METRAL 1000 RECEPTACLES
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS A,B,C,D,E
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND
- THE MIN PCB THICKNESS FOR FRONT PLUG-UP APPLICATIONS IS 1.6mm.
- THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
- CURRENT RATING : 1 AMP PER PIN

8. TEMPERATURE RANGE : -55°C TO +105°C

9. P/N 55003-X01ZZZ SHOWN.

- AVOID TRACES ON TOP OF BOARD DUE TO EXPOSED GROUND SHIELD.
- FOR FRONT PLUG-UP APPLICATIONS, THE EVEN NUMBERED PINS IN ROW "C" CAN BE USED FOR POWER AS WELL AS FOR GROUND. IF THE SURROUNDING PINS ARE NOT USED FOR POWER, THEN EACH PIN CAN CARRY 3 AMPS. IF THE SURROUNDING PINS ARE USED FOR POWER, THEN EACH PIN CAN CARRY 1 AMP. WHEN THE SURROUNDING PINS ARE USED ONLY FOR LOW SPEED SIGNALS, THEN THE EVEN NUMBERED "C" ROW PINS CAN ALSO BE USED FOR LOW SPEED SIGNALS.
- AFTER INSERTION INTO, CIRCUIT BOARD WITH QUALIFIED TOOL.
- PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- FOR LEAD FREE PART NUMBERS, ADD AN 'LF' SUFFIX.
EXAMPLE: 55003-X01002LF.
- PLATING INFORMATION: PLATING ON CONTACT AREA MEETS THE PERFORMANCE LEVELS SHOWN IN TABLE ON THIS SHEET.
PLATING ON "LF" TAILS IN Sn. PLATING ON ALL OTHER TAILS IS SnPb.
EQUIVALENT PRECIOUS METAL PLATING MAY BE SUBSTITUTED.

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com			
ltr	ecn no.	dr	date	linear	0.X ±0.3	COPY		title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SPECIAL LOAD STD.			
L					0.XX ±0.13	projection 					
					.XXX ±.051						
				angles	0° ±2°	 scale 1:1		product family METRAL 4000 code			
				dr	E. KROPER. 2001-01-12			size		213	
				enrg	J. VOLSTROF 2001-01-12			dwg no			sheet 2
				chr	J. VOLSTORF 2001-01-12			55003			
				appd	J. VOLSTROF 2001-01-12						
sheet index	revision sheet										

Pro/E

cage code 22526

PDM: Rev:L


STATUS: Released

Printed: Dec 16, 2008




PRODUCT NUMBER
SEE SHEETS 1, 2, 4

PRESS-FIT HOLES	OPTION 1 SnPb PLATING	OPTION 2 COPPER	OPTION 3 IMMERSION Ag
FINISHED HOLE DIAMETER	0.45-0.55	0.48-0.57	0.48-0.57
DRILLED HOLE SIZE	0.60±0.02	0.60±0.02	0.60±0.02
COPPER PLATING THICKNESS	0.025 MIN-0.050 MAX.	0.025 MIN-0.050 MAX.	0.025 MIN-0.050 MAX.
HOLE PLATING	0.005-0.015 SnPb	NONE	.0002 - .0006 Ag

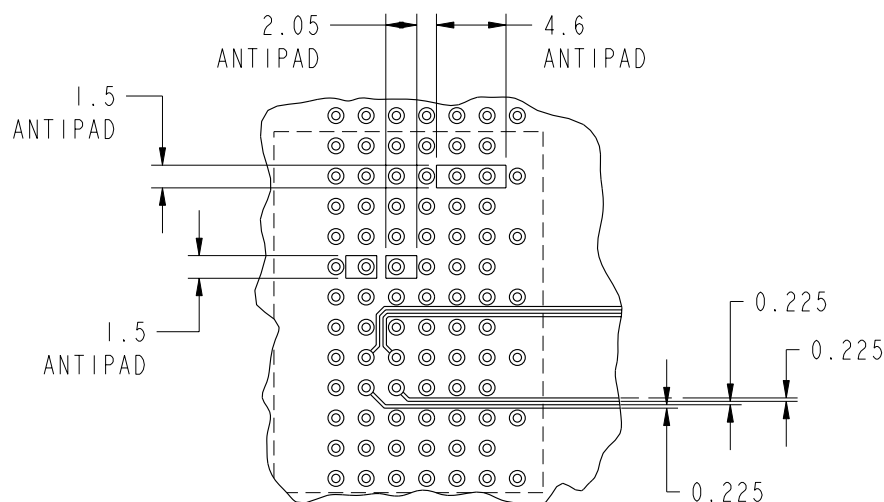

RECOMMENDED TRACK AND ANTIPAD DIMENSIONS
SCALE 2:1

RECOMMENDED PCB HOLE PATTERN
(COMPONENT SIDE) SEE NOTE 10

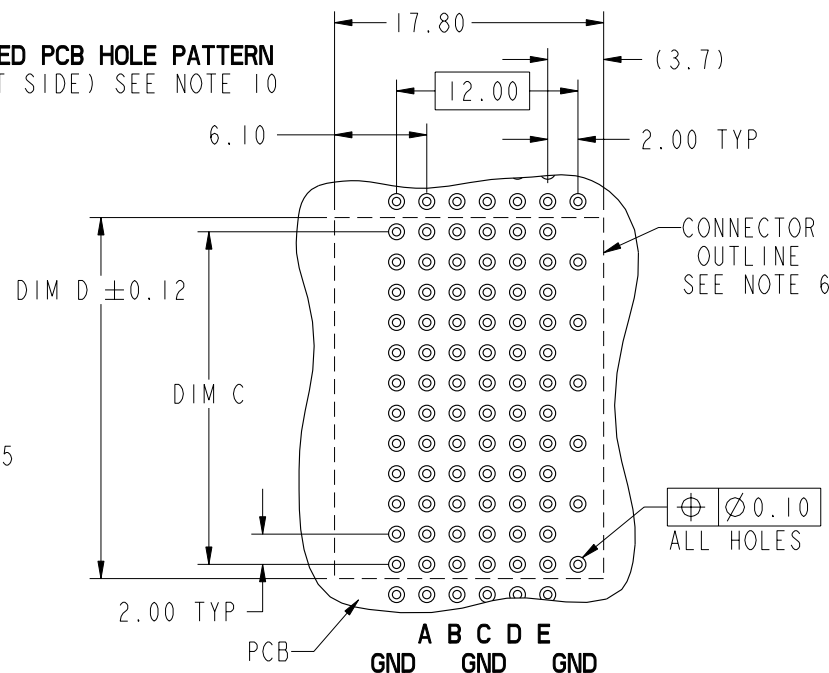

mat'l code SEE NOTE 3				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecm no.	dr	date	linear	0.X ±0.3	projection 	COPY	title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SPECIAL LOAD STD.	product family METRAL 4000
L					0.XX ±0.13				
					.XXX ±.051				
				angles	0° ±2°	MM 	scale 1:1	size A	dwg no 55003
				dr	E. KROPER. 2001-01-12				
				enrg	J. VOLSTROF 2001-01-12				
				chr	J. VOLSTORF 2001-01-12	A	3	sheet 3	code 213
				appd	J. VOLSTROF 2001-01-12				
sheet index	revision sheet								

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.



SPECIAL LOAD PATTERNS

PRODUCT #	ROW	PIN CODES
55003-X01002 SEE NOTE 14 LEAD FREE OPTION	E	03
	D	
	C	
	B	
	A	
	GND	02

PRODUCT #	ROW	PIN CODES
55003-X01003 SEE NOTE 14 LEAD FREE OPTION	E	02
	D	
	C	
	B	
	A	
	GND	

PRODUCT #	ROW	PIN CODES
55003-X01004 SEE NOTE 14 LEAD FREE OPTION	E	02
	D	
	C	
	B	
	A	
	GND	NONE

PRODUCT #	ROW	PIN CODES
55003-X01005 SEE NOTE 14 LEAD FREE OPTION	E	01
	D	
	C	
	B	
	A	
	GND	

DIM A	PIN CODES
5.00	01
5.75	02
6.50	03
7.25	04
8.00	*19

* CURRENTLY NOT AVAILABLE

mat'l code SEE NOTE 3				tolerances unless otherwise specified				CUSTOMER		 www.fciconnect.com				
ltr	ecn no.	dr	date	linear	0.X ±0.3				projection 	title VERTICAL SIGNAL HDR 5 ROW P.F. 30 POS. SPECIAL LOAD STD				
L					0.XX ±0.13									
					.XXX ±.051									
				angles	0° ±2°				 scale 1:1	product family		METRAL 4000		code
				dr	E. KROPER.	2001-01-12		size		dwg no		213		
				enrg	J. VOLSTROF	2001-01-12				sheet				
				chr	J. VOLSTROF	2001-01-12				4				
				appd	J. VOLSTROF	2001-01-12								
sheet index		revision sheet												

cage code 22526

Pro/E

3

4

PDM: Rev:L

STATUS: Released

Printed: Dec 16, 2008