

DWG. NO. SD-55246-001

E

D

C

B


DO NOT SCALE DRAWING

8 7 6 5 4 3 2 1

注)
NOTES

- △ ボタンストロークが 6mm の時、カード飛び出し量は(3.25mm)。
WHEN BUTTON PUSH STROKE IS 6mm, CARD OUT BY (3.25mm).
2. 適合 HEADER ASS'Y : 55244-5021
APPLICABLE HEADER ASS'Y : 55244-5021

No.	品名 NAME	材料 MATERIAL	仕上げ FINISH	個数 PIECE
1	METAL SHELL	ステンレス鋼 t 0.3 STAINLESS STEEL t 0.3	—	1
2	ROD	ステンレス鋼 t 0.8 STAINLESS STEEL t 0.8	—	1
3	LEVER	ステンレス鋼 t 0.4 STAINLESS STEEL t 0.4	—	1
4	TOP BUTTON	ガラス入りポリエスチル UL94V-0 PBT G.F. UL94V-0	—	1
5	BASE BUTTON	ポリカーボネート UL94V-0 色 : 黒色 POLYCARBONATE UL94V-0 COLOR: BLACK	—	1
6	PIN	黄銅 BRASS	—	1

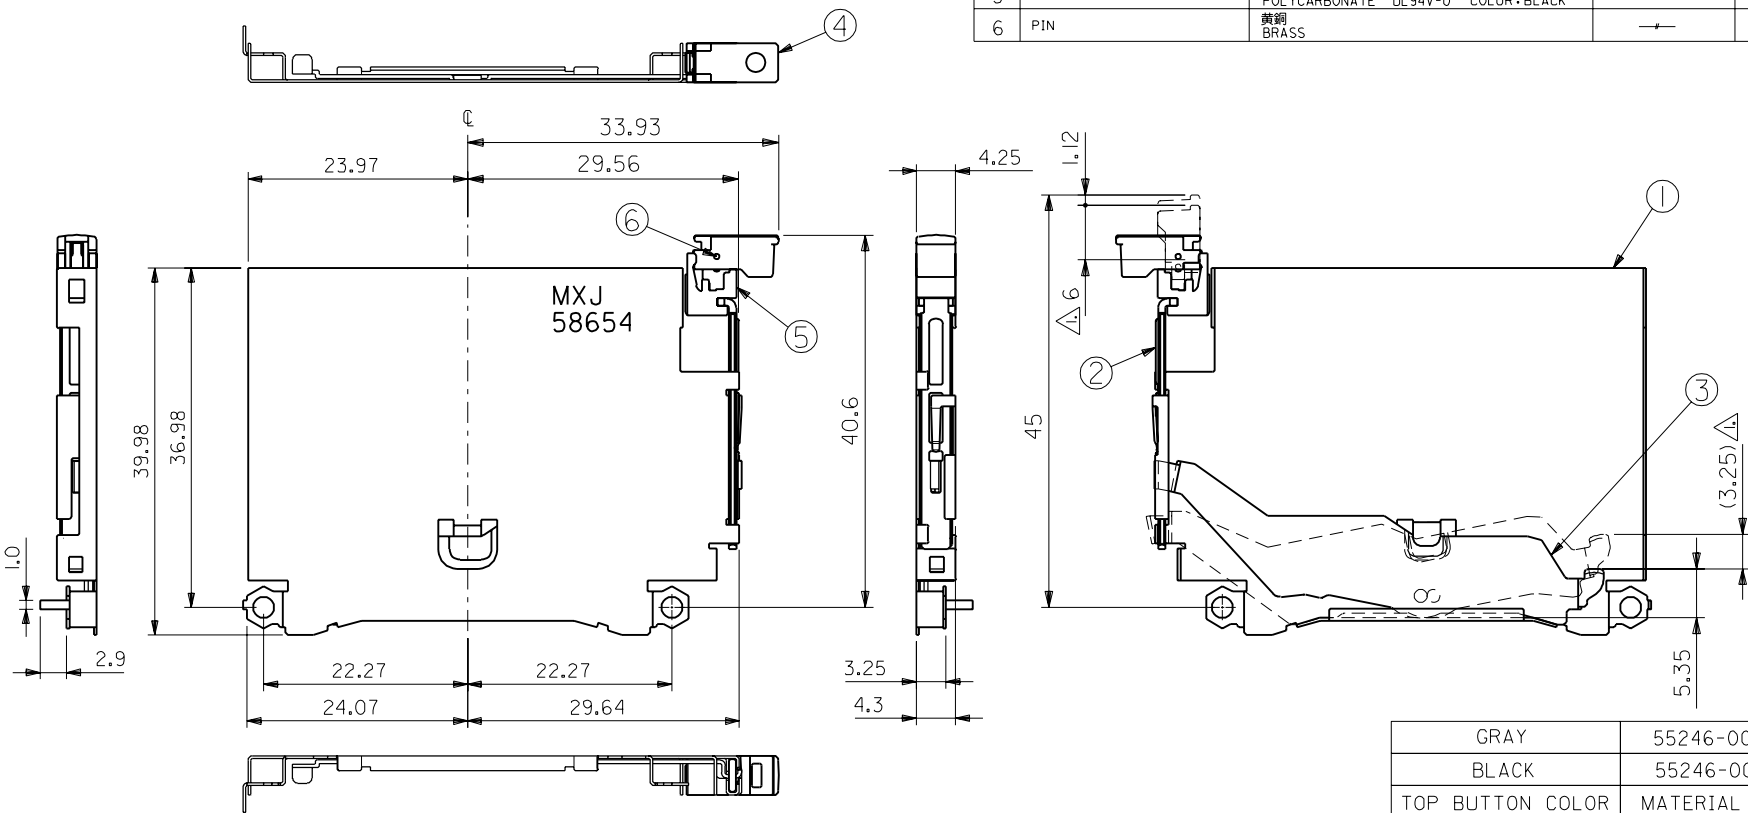

GRAY	55246-0015
BLACK	55246-0011
TOP BUTTON COLOR	MATERIAL No.

EC NO. DRWN: CHK: APPR:	REVISED EC NO. JD90086 DRWN: THANYU '98/07/15 CHK: MSASAO '98/07/15 APPR: HIKESUGI '98/07/15	REVISED EC NO. JD81537 DRWN: THANYU '98/05/14 CHK: MSASAO '98/05/14 APPR: HIKESUGI '98/05/14	RELEASED EC NO. JD81080 DRWN: THANYU '98/02/06 CHK: MSASAO '98/02/06 APPR: HIKESUGI '98/02/06	DESCRIPTION REV	MATERIAL 材料	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 2-1	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION	☐ mm INCH	☐ INCH mm	☒ mm ONLY	REVISE ON CAD ONLY
					SEE CHART	10 UNDER 未満	+0.2	DRAWN BY & DATE T. Hanaya '98/02/06	TITLE: CF CARD CONN. EJECT MECHANISM METAL SHELL ASS'Y (FOR LEFT SIDE BUTTON) MOLEX INCORPORATED					
					FINISH 仕 上 げ	10 OVER 以上	30 UNDER 未満	+0.25						CHECKED BY & DATE H. Sasaki '98/02/06
					WIRE RANGE 適用電線範囲	30 OVER 以上		+0.3						APPROVED BY & DATE H. Sasaki '98/02/06
					INS. RANGE 被覆外径	ANGLE 角度	+3°	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						SIZE B