

PRODUCT NUMBER	NUMBER OF POS.	DIM"C"	DIM"D"	NB. OF TER.	CONTACT PLACED IN CAVITY												
					1	2	3	4	5	6	7	8	9	10	11	12	13
56600-Y01(LF)	1 x 13	30.48	32.94	7	x		x		x		x		x		x		x

{ TABLE ACCORDING VIEW A }

PRODUCT NUMBER
56600-YXXLF

WHEN NEEDED, SUFFIX LETTER "LF"
INDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 5

NUMBER OF POSITIONS

PLATING CODE

3= 0.76µm GOLD ON CONTACT AREA.

3.81µm TIN-LEAD ON TAIL.

4= 5µm TIN-LEAD ON CONTACT AREA.

3.81µm TIN-LEAD ON TAIL.

WHEN SUFFIX "LF" IS REQUIRED, 2µm MIN MATTE
TIN OVER 1.27 MIN Ni IS SUPPLIED INSTEAD OF SnPb.

NOTES:

- 1 - HOUSING: THERMOPLASTIC GLASS FILLED
FLAME RETARDANT PER UL 94 V-0 COLOR: GREY.
- 2 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 - PRODUCT PACKED IN PLASTIC TUBE.
- 4 - RECOMMENDED IR PROFILE PER TA842.
- 5 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.


b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDS
MAX IN A CONVECTION, INFRA-RED OR VAPOR
PHASE OR REFLOW OVEN.



c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-22-008

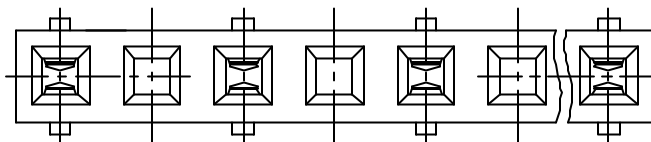

VIEW A

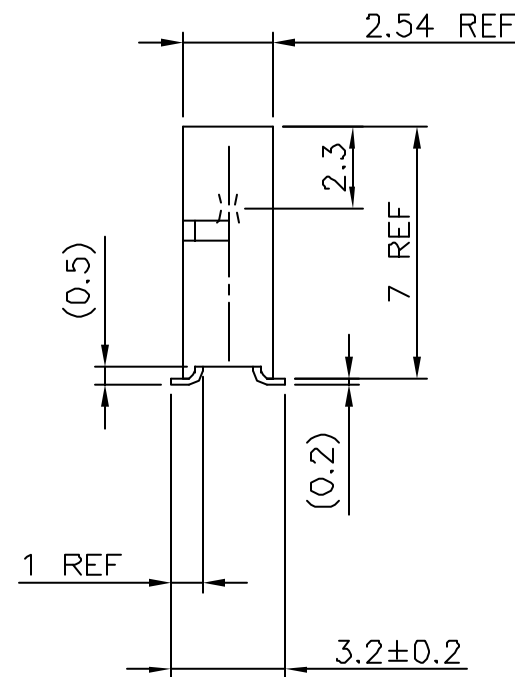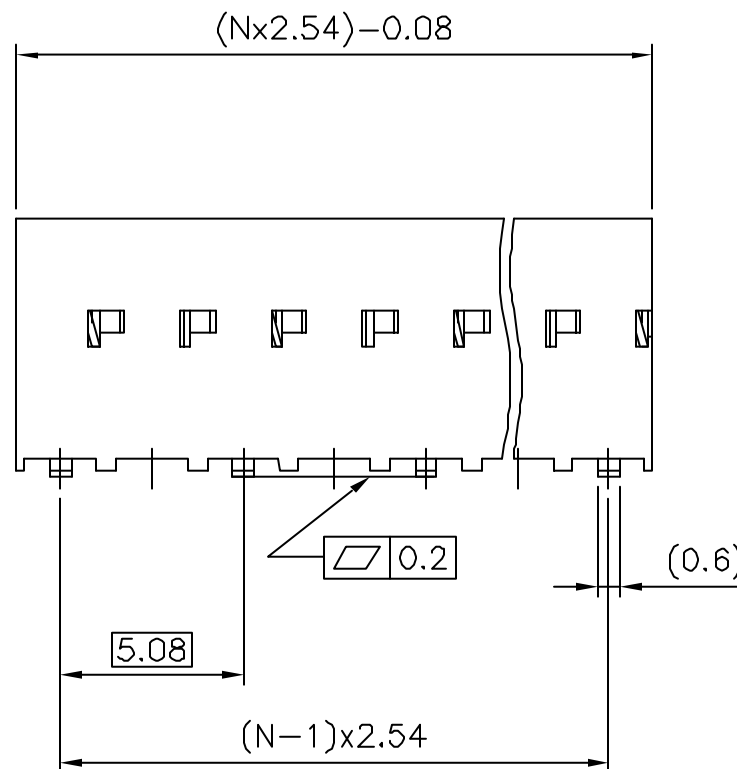

mat'l. code SEE NOTES				surface ISO 1302	tolerance ISO 406 ISO 1101	projection mm	product family Dubox			
Ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title BtB recept.SMT			
A	F10732	PNZ	01.12.14	angles	Linear		Vert SR selct. load			
B	F03-0284	DLE	03.10.07	±2'		scale 5:1	dwg no		sheet 1 of 2	size
C	F04-0347	DLE	04.11.09				56600			A3
D	F06-0204	DLE	06.06.19	dr	D.LEGRAND	01.12.14	type			
E	F06-0288	DLE	06.09.28	engr	P.NIZZI	01.12.14	CUSTOMER			
				chr	D.LEGRAND	01.12.14	Drawing			
				appd	PNZ	01.12.14				
sheet index	revision sheet	E	B	1	2					

