
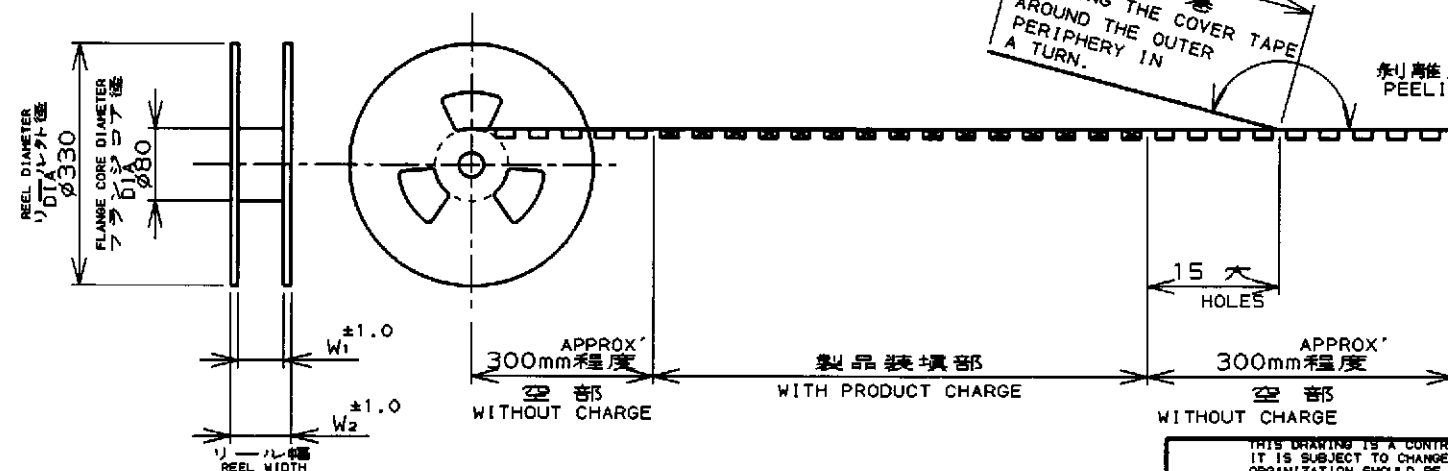


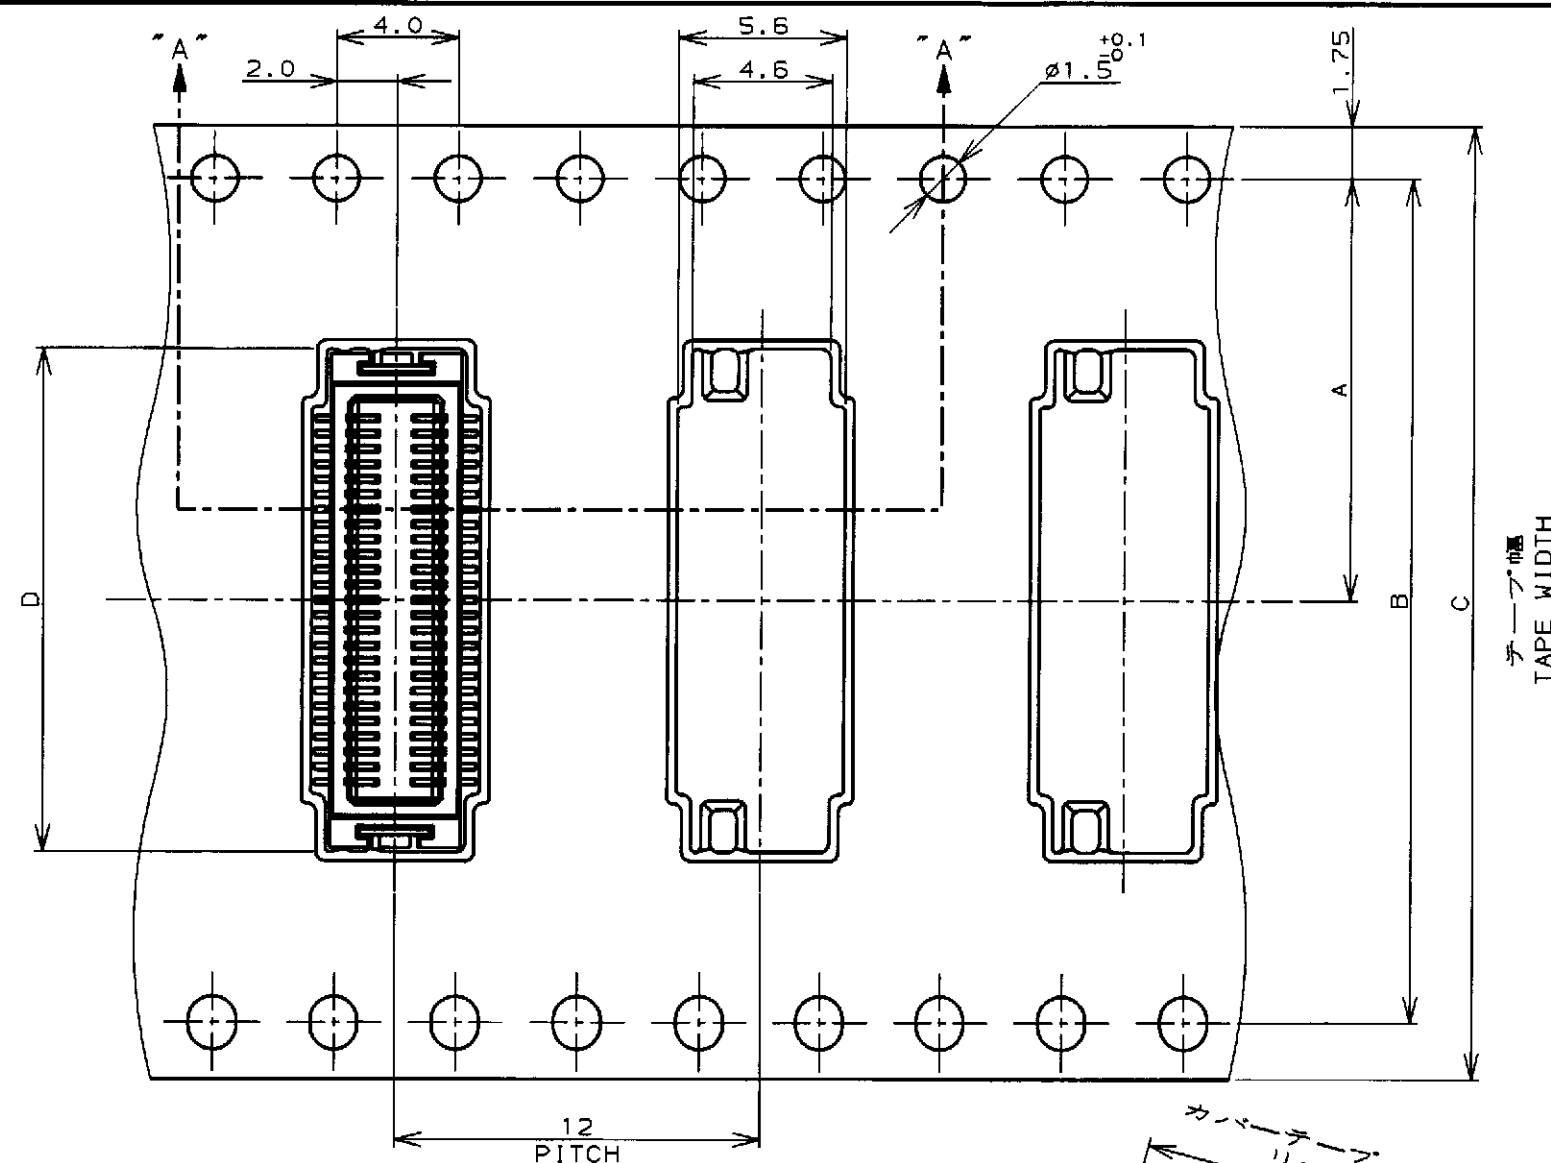

カバーテープ
リリーフ部
外周一巻
WEEDING THE COVER TAPE
AROUND THE OUTER
PERIPHERY IN
A TURN.

剝離角度, 165°~180°
PEELING ANGLE.

15
HOLES


APPROX.
300mm 程度
空部
WITHOUT CHARGE

製品装填部
WITH PRODUCT CHARGE

APPROX.
300mm 程度
空部
WITHOUT CHARGE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
単位: 概
mm



MATERIAL
材料

TOLERANCES UNLESS
OTHERWISE SPECIFIED

一般公差
10% : ±0.2
30% : ±0.25
100% : ±0.3
ANGLE : ±3°

FINISH
仕上

36.7	33.5	19.1	32	28.4	14.2	↑	60	6- ↑ -0	6- ↑ -0
20.7	17.5	9.1	16	7.5	1000	20	2-316112-0	2-316117-0	
W ₂	W ₁	D	C	B	A	数量 (ヶ) QTY/REEL	極数 Pos.	コネクタ型番 (ネラ状) CONNECTOR P/N (L/P)	リール巻 コネクタ型番 TAPING P/N

INSTRUCTION SHEET
取扱説明書
411-5808

OWN
Y. NAKAZAWA
2/28 '97

CHK
K. ASAKAWA
4/7 '97

APVD
S. Kato
12/18

PRODUCT SPEC
製品規格
108-5496

APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

WIRE RANGE
包含電線断面積

INSULATION DIA
被覆外径

AMP

名称

ON TAPING (EMBOSS)

0.5mm PITCH Fine Mate CONN.

TAB ASSEMBLY (V-TYPE)

SIZE

CAGE CODE

DRAWING NO
番号
C= 316117

RESTRICTED TO

SCALE
尺度

SHEET
1

OF
2

REV
B

REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
0		作成	FJ00-0061-97	2/28 '97	Y. N	K. A
A		改訂	FJ00-2247-98	12/3 '98	Y. N	K. A
B		改訂	FJ00-2287-98	12/10 '98	Y. N	K. A

注記:


△ 指示穴は 50極品のみ適用。

NOTE:

△ THESE HOLES ARE APPLIED TO 50Pos. ONLY.

引出し方向

TOP OF REEL

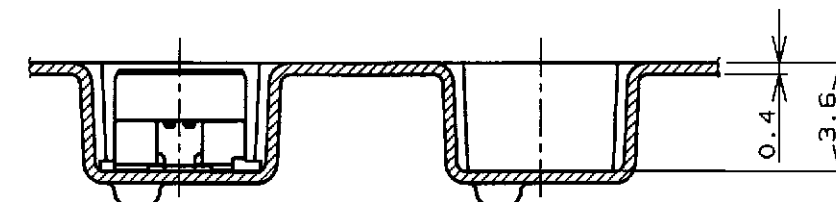

SECT. "A" - "A"

