

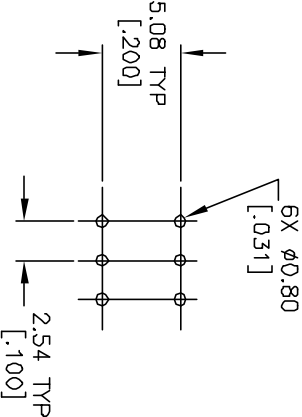


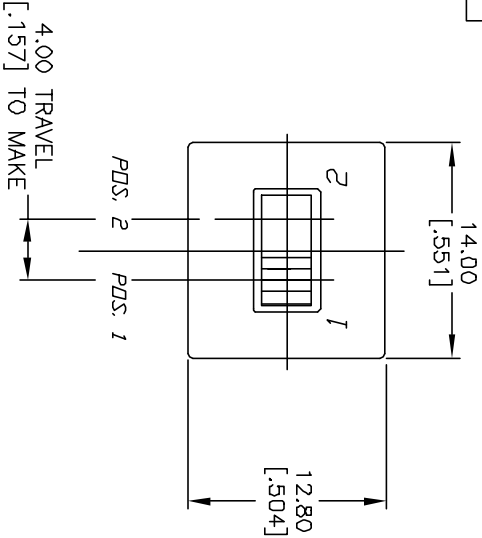

RECOMMENDED P.C.B. LAYOUT



CONTACT CONFIGURATION

SWITCH FUNCTION	
PDS. 1	PDS. 2
DN	DN
2-1,5-4	2-3,5-6

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 5A@ 120VAC OR 28VDC 1A@ 250 VAC
5. FIXED TERM & MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE
6. CONTACT RESISTANCE: 10MΩ MAX
7. MECHANICAL LIFE: 20,000 OPERATIONS
8. INSULATION RESISTANCE: 1000 MΩ UNDER 500V
9. OPERATING TEMP: -40°C TO 85°C
10. BREAKING CAPACITY: 1A 30VDC

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	11718	REVISED, AND REDRAWN	10/09/01	CJC

TITLE				
600 DP1 S1 M2 Q E				
SCALE	DATE	DR	DWG	REV
2:1	10/09/01	CJC	T620004	B

E-SWITCH®