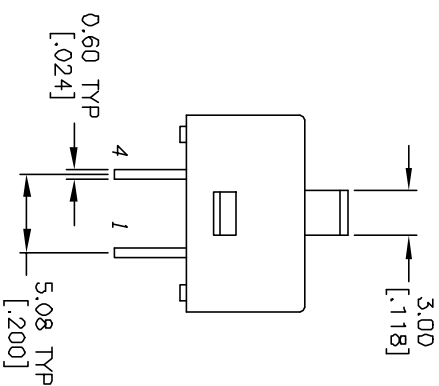
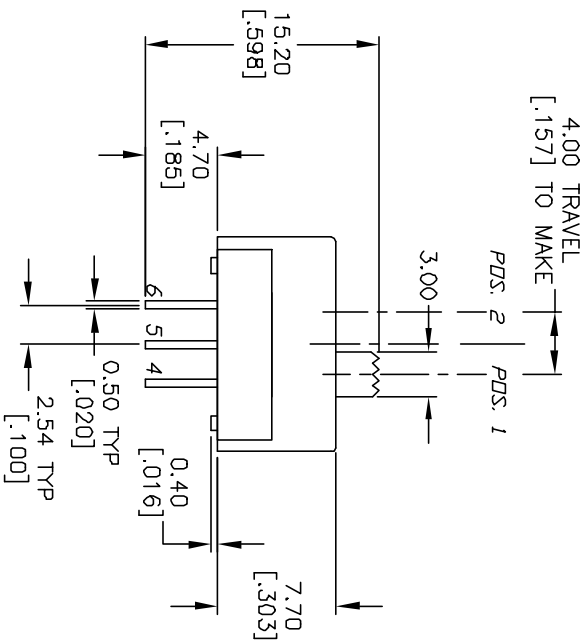
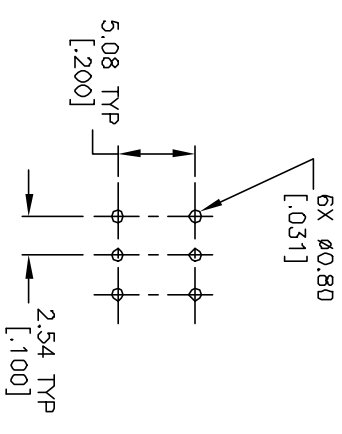
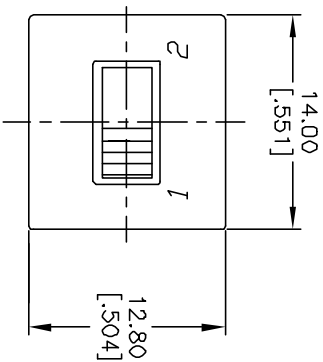


CIRCUIT: DPDT

CONTACT CONFIGURATION

SWITCH FUNCTION	
POS. 1	POS. 2
DN	DN
2-1,5-4	2-3,5-6

NOTES:

1. ALL DIMENSIONS IN MM. [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.4 VOLT-AMPS(VA) MAX@20V MAX (AC OR DC)
- ▲5. FIXED TERM & MOVING CONTACT:
COPPER ALLOY W/GOLD PLATE OVER NICKEL PLATE
6. CONTACT RESISTANCE: 50MΩ MAX
7. MECHANICAL LIFE: 20,000 OPERATIONS
8. INSULATION RESISTANCE: 1000 MΩ UNDER 500V
9. OPERATING TEMP: -40°C TO 85°C
10. BREAKING CAPACITY: 400 MA 20V

TITLE			
600 DP1 S2 M2 R E			
REV.	ECN No.	DATE	CHKD
A	11718	10/09/01	CJC
RELEASED FOR PRODUCTION			
DESCRIPTION			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	DWG
2:1	10/09/01	CJC	T622005
REV			
A			