

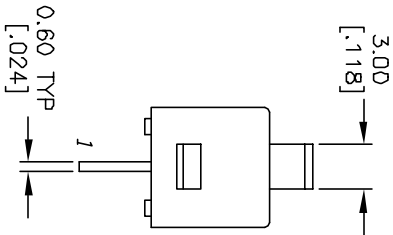


RECOMMENDED P.C.B. LAYOUT

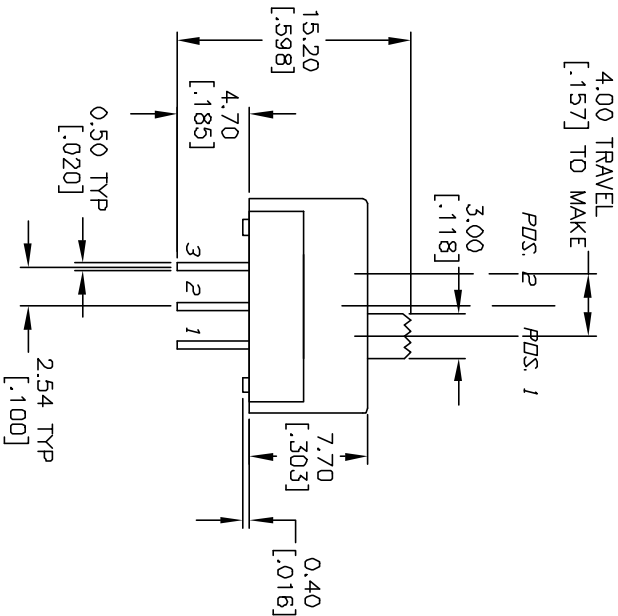

CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION	
PDS. 1	PDS. 2
DN	DN
2-1	2-3

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.4 VOLT-AMPS(VA) MAX@20V MAX (AC OR DC)
- ▲5. FIXED TERM & MOVING CONTACT:

- COOPER ALLOY W/GOLD PLATE OVER NICKEL PLATE
- 6. CONTACT RESISTANCE: 50MΩ MAX
- 7. MECHANICAL LIFE: 20,000 OPERATIONS
- 8. INSULATION RESISTANCE: 1000 MΩ UNDER 500V
- 9. OPERATING TEMP: -40°C TO 85°C
- 10. BREAKING CAPACITY: 400 MA 20V

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	11718	REVISED, AND REDRAWN	10/08/01	CJC

TITLE				
600 SP1 S2 M1 R E				
E-SWITCH®				
SCALE	DATE	DR	DWG	REV
2:1	10/08/01	CJC	T611002	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED