
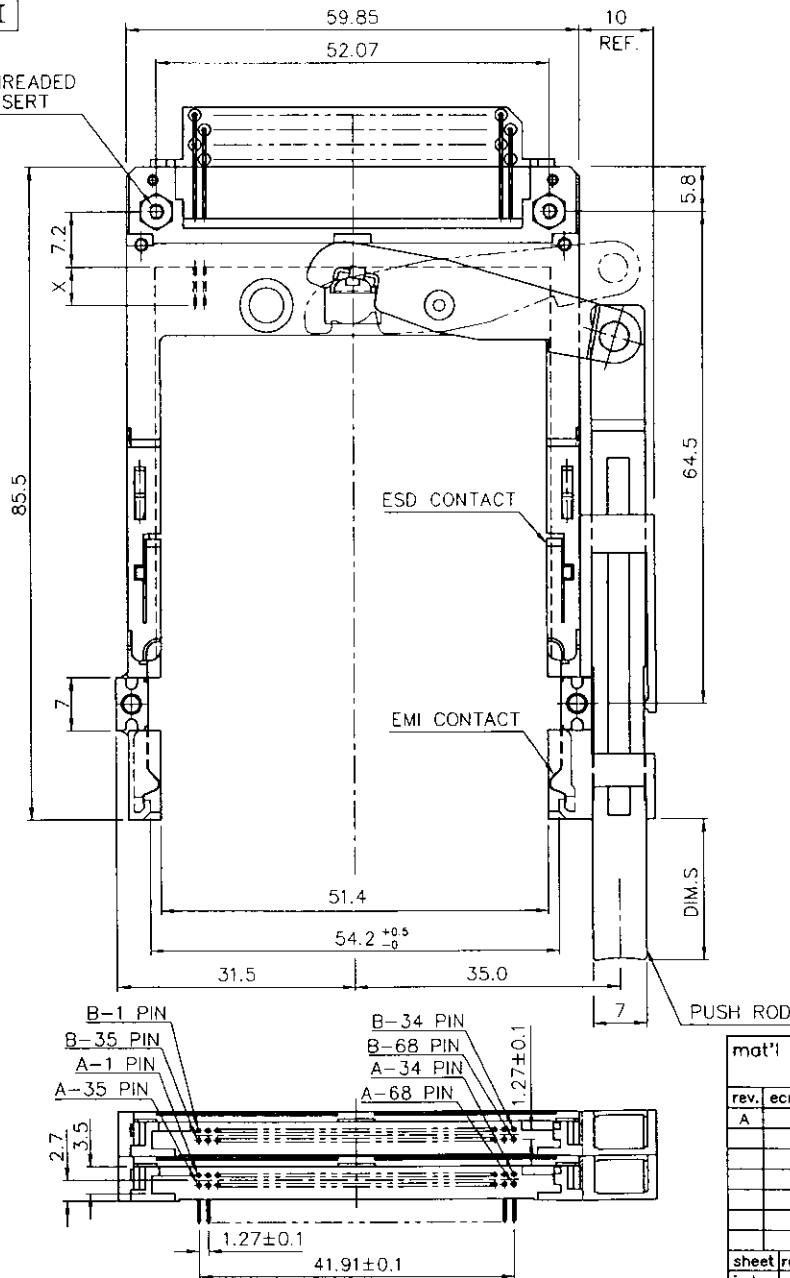


USE THE FOLLOWING P/N FOR OFFICIAL ORDERING

③	EJECT MECH ASS'Y	94307-00** SEE TABLE I
②	EJECT MECH ASS'Y	88644-00** SEE TABLE I
①	HDR ASS'Y	95705-000
DESCRIPTION	P/N	

PRODUCT NO.	61716-200**
SEE TABLE I	

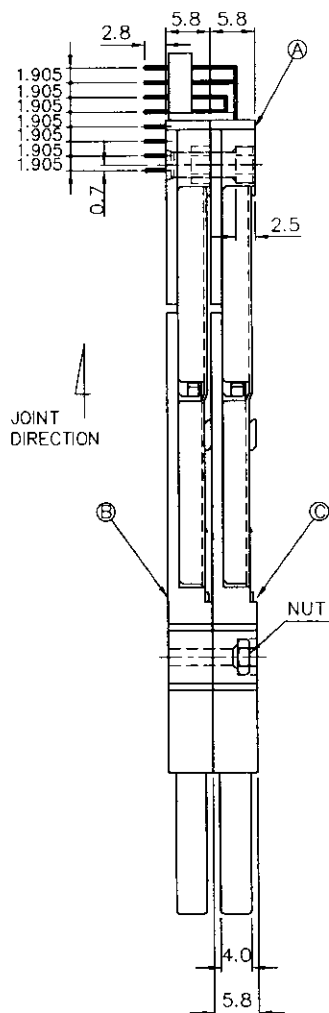


NOTES:

- EJECT FORCE : 3.5 Kg MAX.
- EJECT TRAVEL: 8.0mm
- MATERIAL
 - PART ① (HEADER ASS'Y)
 PLASTIC : HOUSING : LCP UL94V-0 BLACK
 : LOCATOR : G.F. 6/6 NYLON UL94-V0 BLACK
 PIN : PHOSPHOR BRONZE
 - PART ② AND ③ (EJECT MECHANISM ASS'Y)
 PLASTIC : GUIDE : POLYPHTHARAMID UL94V-0 BLACK
 : PUSH ROD : POLYPHTHARAMID UL94V-0 BLACK
 PLATE : STAINLESS
 EMI CONTACT : PHOSPHOR BRONZE
- FINISH (PIN)
 UNDER PLATING : 0.5 μm MIN. Ni
 CONTACT AREA : 0.1 μm MIN. GOLD OVER 0.5 μm MIN. Pd-Ni
 SOLDER TAIL : 2.5 μm MIN. Sn-Pb
- DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68

6. TABLE I

**	DIM.S	PUSH ROD COLOR
CA	13.0	BLACK
CH	13.0	NATURAL
DA	15.2	BLACK
DH	15.2	NATURAL
EA	18.5	BLACK
EH	18.5	NATURAL
FA	21.0	BLACK
FH	21.0	NATURAL



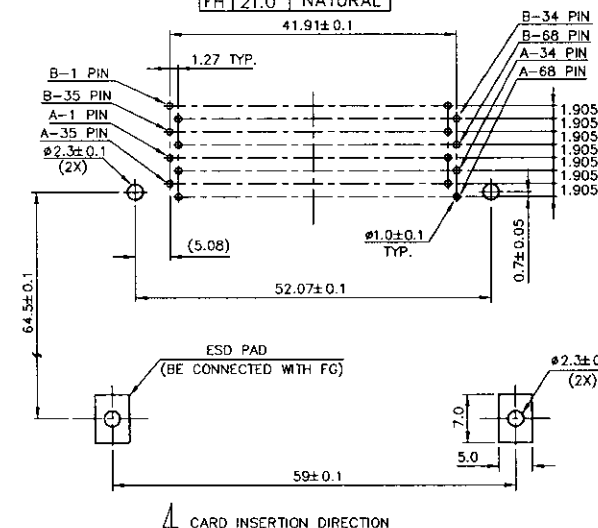


mat'l code					tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev.	ecn	no.	dr	date	linear	±0.30		projection 	title 68P DOUBLE EJECTOR HEADER ASS'Y FOR TYPE 1/2/3	
A										
					angles	±2°				
			dr	WENDY CHEN	10/03/96	unit	product family		code	
			enqr	JOSEPH HSIA	10/03/96	mm/inch	size		dwg no.	TWN
			chr	JOSEPH HSIA	10/03/96	scale	A3		61716	sheet
			appd	JENN TSAO	10/03/96	1.5:1				2 OF
sheet	revision									
index	sheet									

Tous droits strictement réservés. Reproduction ou communication à des tiers sans autorisation écrite du propriétaire. FCI
 FCI
 FCI

All rights strictly reserved. Reproduction or issue to third parties is only for whatever is not permitted without written authority from the proprietor. FCI
 FCI
 FCI

PRODUCT NO.
 61716-600**
 SEE TABLE I

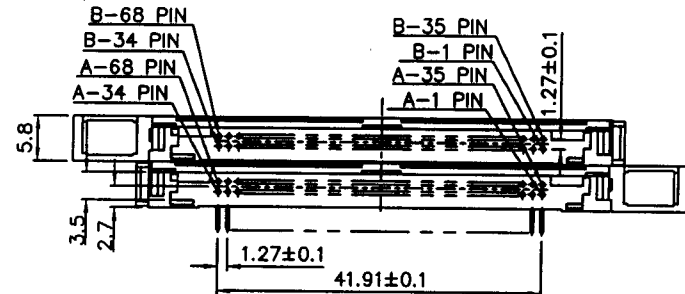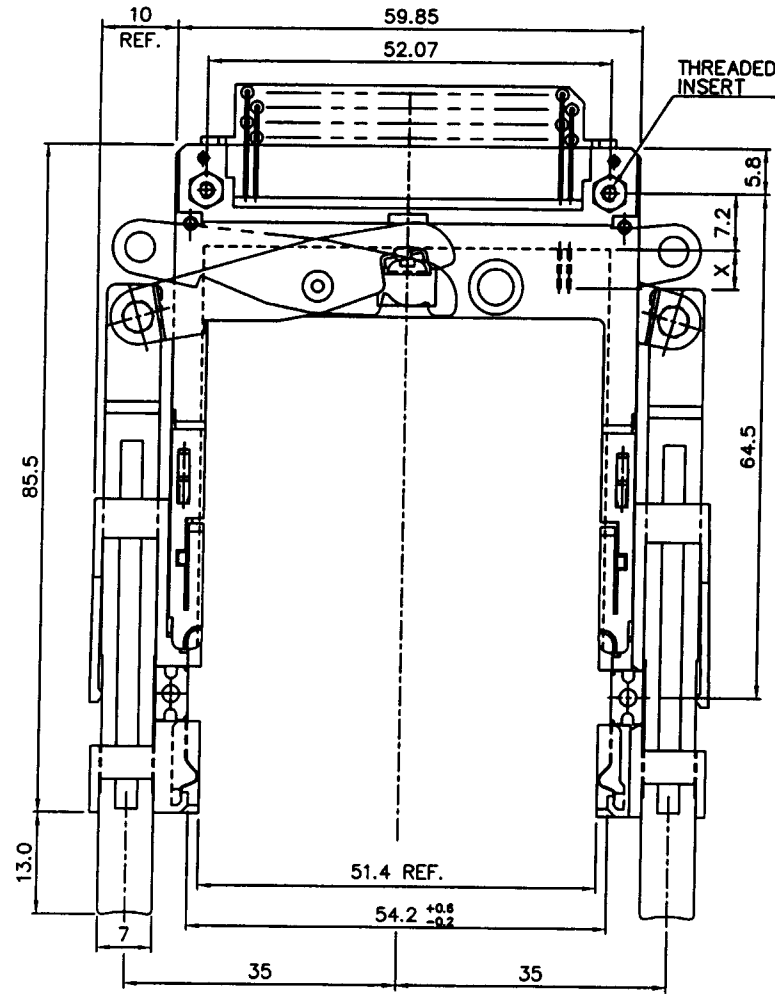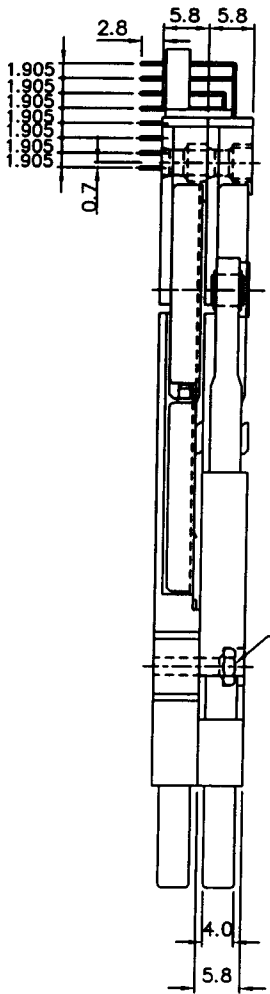


- NOTES:
 1. EJECT FORCE : 3.5 Kg MAX.
 2. EJECT TRAVEL: 8.0mm
 3. MATERIAL
 3.1 HEADER ASS'Y:
 PLASTIC : HOUSING ...LCP UL94V-0 BLACK
 : LOCATOR ...G.F. 6/6 NYLON UL94-V0 BLACK
 PIN : COPPER ALLOY
 3.2 EJECT MECHANISM ASS'Y:
 PLASTIC : GUIDE: POLYPHTHARAMID UL94V-0 BLACK
 : PUSH ROD: POLYPHTHARAMID UL94V-0 BLACK
 PLATE : STAINLESS
 EMI CONTACT: PHOSPHOR BRONZE
 4. FINISH (PIN)
 UNDER PLATING : 0.5 μm MIN. NI
 CONTACT AREA : 0.1 μm MIN. GOLD OVER 0.5 μm MIN. Pd-NI
 SOLDER TAIL : 2.5 μm MIN. Sn-Pb
 5. DIM "X"

4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68

RECOMMENDED DIAMETER IS #1.0, FOR PROCESSES USING PASTE REFLOW, HOLE MAYBE AS SMALL AS #0.79.

7. TABLE I

*	PUSH ROD COLOR
A	BLACK
H	NATURAL

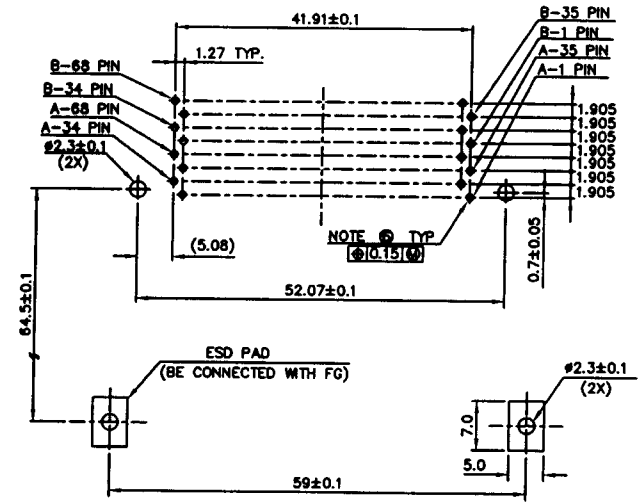

mat'l code		tolerance unless otherwise specified		CUSTOMER		ELECTRONICS	
rev.	ecn no.	dr	date	linear	±0.30	COPY	FCI
B				angles	± 2°	projection	title
		dr	WENDY CHEN 03/05/01				DOUBLE EJECTOR HEADER ASS'Y (3.3V) FOR TYPE 1/2/3
		enqr	MINERVA WANG 03/05/01			unit	product family : PCMCIA
		chr	JOSEPH HSIA 03/05/01			mm/inch	code
		appd	JOSEPH HSIA 03/05/01			scale	TWN
sheet	revision					A3	size
index	sheet					61716	dwg no.
							sheet
							3 of