
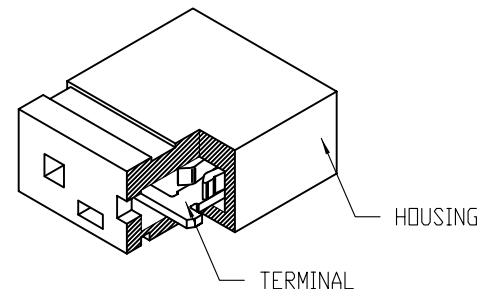


PRODUCT NO	PLATING
63429-1Y2	0,38um / 15u" Au CONTACT. Au FLASH ALL OVER 1,27um / 50u" Ni
63429-2Y2	0,76um / 30u" Au CONTACT. Au FLASH ALL OVER 1,27um / 50u" Ni
63429-3Y2	2,54um / 100u" TIN/LEAD OVER 1,27um / 50u" Ni
63429-4Y2	0,08um / 3u" Au FLASH OVER 1,27um / 50u" Ni

PRODUCT NO	PLATING
63429-1Y2LF ⑤	0,38um / 15u" Au CONTACT. Au FLASH ALL OVER 1,27um / 50u" Ni
63429-2Y2LF ⑤	0,76um / 30u" Au CONTACT. Au FLASH ALL OVER 1,27um / 50u" Ni
63429-4Y2LF ⑤	0,08um / 3u" Au FLASH OVER 1,27um / 50u" Ni

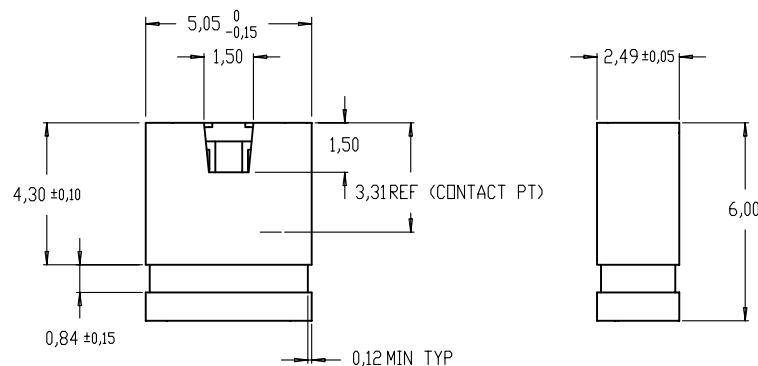

NOTE :

- MATERIAL : -
HOUSING : 30% GLASS FILLED POLYESTER
FLAME RETARDANT PER UL 94V-0
COLOR : REFER TO TABLE
TERMINAL : PHOSPHOR BRONZE
 - PLATING : REFER TO TABLE
 - TECHNICAL REQUIREMENTS :
INSERTION FORCE : 12 NEWTONS (2.7 LB) MAX. PER CONNECTOR.
WITHDRAWAL FORCE : 2 NEWTONS (0.45 LB) MIN. PER CONNECTOR.
(MATE WITH 0.635MM SQ. PIN 2.54MM PITCH HEADER)
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 200° C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑤ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

CONFIDENTIAL

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	www.fciconnect.com		
ltr	ecn no	dr	date	linear	X.X=±0.35	projection	title		
A	S90164	BSL	9/16/99	linear	X.XX=±0.25		JUMPER		
B	S90219	BSL	12/15/99	linear	X.XXX=±0.10				
C	S90227	BSL	12/23/99	angles	0° ±3°		product family JUMPER		
D	S04-0261	KBM	12/10/04	dr	BS LOW				
				enrg	JPEH	12/23/99	size dwg no		
				chr	KBMAH	12/10/04			
				appd	JOEY NG	12/10/04	A 63429		
sheet index		revision sheet							
							code		
							22526		
							1 of 1		

cage code 22526