

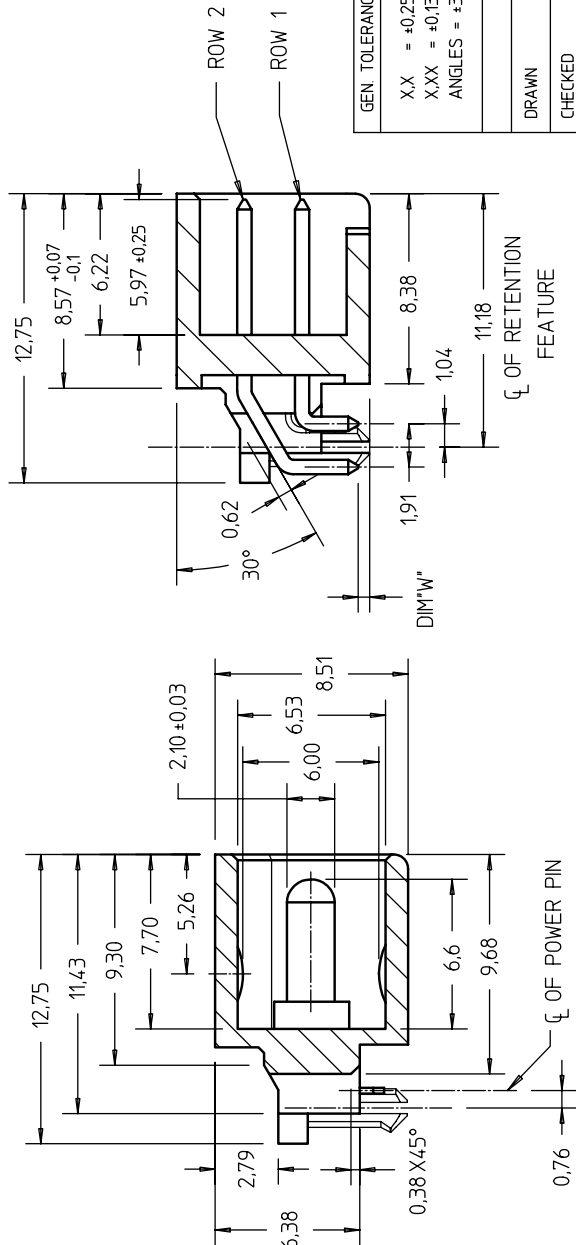
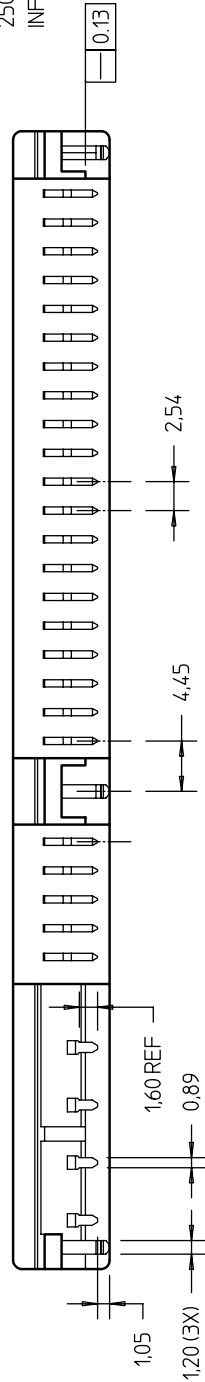





PRODUCT NO	DIM"W"
63430-001LF	1.07
63430-001WLF	0.51

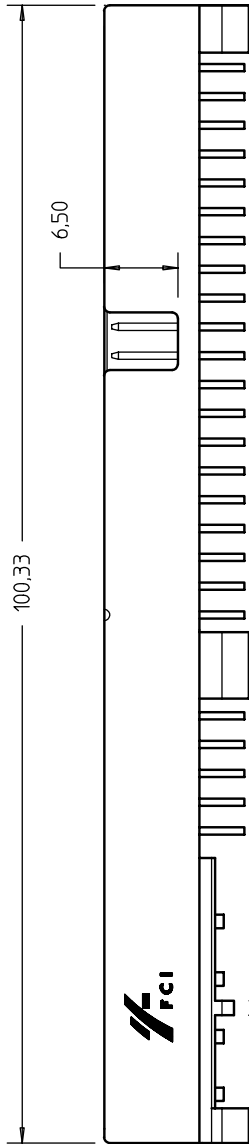

NOTES:

1. MATERIAL:
HOUSING : 40% GF PPS (BLACK) UL 94V-1
SIGNAL PIN: PH BRONZE
FINISH : 4u" MIN AU FLASH
UNDER PLATING: 50u" NICKEL
POWER PIN : BRASS C2680 R-H
FINISH : 40u" MIN Sn OVER 30u" MIN COPPER
2. TEXT FOR PIN DESIGNATIONS
3. MARK PIN 1 WITH "U" NOTCH
4. PACKAGING PER GES-14-447
60 PCS PER TRAY, 420 PCS PER BOX
5. THIS PRODUCT MEETS EUROPEAN UNION
DIRECTIVES AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-22-008
6. THIS HOUSING WILL WITHSTAND EXPOSURE TO
250°C TEMP FOR 10 SECONDS IN A CONVECTION,
INFRA-RED OR VAPOR PHASE REFLOW OVEN

CUSTOMER COPY

GEN. TOLERANCES		DO NOT SCALE DWG.		DESCRIPTION	COMBO, RA HDR
X.X = ±0.25					
X.XX = ±0.13					
ANGLES = ±3°			NAME	DATE	
			R CRASTA	8 OCT 99	
DRAWN					
CHECKED			R CRASTA	18APR 05	PRODUCT NO. 63430
APPROVED			JOEY NG	18APR 05	SCALE SHT <u>2</u> OF <u>2</u>

A

B

A

B