



type	Product	Customer	Drawing
------	---------	----------	---------

PRODUCT NO	⑧	POS	DIM A	DIM B	DIM C	POL. POS	TERM. DELETED
63440-X01		2X16	30.00	32.80	16.40	1,2,31,32	1,2,31,32
63440-X02		2X3	4.00	6.80	3.40	3	3
63440-X03		2X16	30.00	32.80	16.40	1,31	1,31
63440-X04		2X3	4.00	6.80	3.40	3	4
63440-X05		2X6	10.00	12.80	6.40	1,2,11,12	1,2,11,12



PLATING	DESCRIPTION NOTE 4
0	0.2 um / 8u" Au
1	0.76 um / 30 u" Au
2	UNASSIGNED
3	0.38 um / 15u" Au

NOTES:

1. HOUSING: PCT BEIGE UL 94V-0.
2. TERMINAL MATERIAL: PHOS BRONZE.
3. SITE CODE TO BE LOCATED AS SHOWN.
4. PLATING: Au OVER 1.27 um/50u" Ni AT CONTACT.
5. POLORISED POS REFER TO TABLE. SEE FIG.1 FOR SECTIONAL VIEW.
6. TERMINALS TO BE DELETED REFER TO TABLE FOR POS.
7. POLARISED AND TERMINAL DELETED IN THE SAME POSITION
- ⑧ PRODUCT DESCRIPTION CODE :



⑨ SOLDERTAIL PLATING:

- a) SOLDERTAIL OF P/N:63440-XXX IS TIN/LEAD PLATED.
 - b) SOLDERTAIL OF P/N:63440-XXXLF IS 100% MATTE TIN PLATED.
- 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 250° C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

- 11 THE HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57MM MINIMUM THICK CIRCUIT BOARD.

- ⑫ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

- 13 A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.




FIG. 2

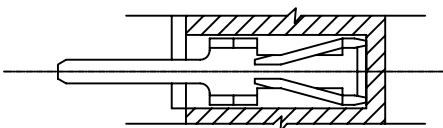


FIG. 1

mat'l. code		surface		tolerance		projection		product family	
litr	ecn no	dr	date	ISO 1302	ISO 406	ISO 1001	MM	MINITEK	
J				tolerances unless otherwise specified					
				angles	linear	XX ± 0.25			
				±.3"	XX ± 0.13				
				dr	JANET TAN	2000-05-30			
				engr	JPEH	2000-06-01			
				chr	KH LEE	2000-06-04			
				apud	JOEY NG	2000-06-04			
sheet	revision								
index	sheet								

CONFIDENTIAL

title
POL. MINITEK VCC
W/LATCHING

dwg no
63440

sheet 2 of 2
size
A