


PRODUCT NO
SEE TABLE

| REV | DESCRIPTION | BY | DATE |
|-----|--------------------|------|----------|
| T | REWORK | DA | 11/8/98 |
| U | ADD -266 THRU -268 | DA | 11/15/98 |
| V | ADD LF PIN | Long | 10/16/98 |
| W | update Logo | Long | 11/19/98 |
| X | ADD optional wire | W | 12/16/97 |





| REV | DATE | BY | CHKD | APP'D | DESCRIPTION | QTY | UNIT | REMARKS | DATE | BY | CHKD | APP'D | REMARKS |
|-----|----------|----|------|-------|-------------|--------|------|---------|------|----|------|-------|---------|
| 001 | 12/15/98 | DA | | | 0.000±.005 | 100000 | PCB | | | | | | |
| 002 | 12/15/98 | DA | | | 0.000±.005 | 100000 | PCB | | | | | | |
| 003 | 12/15/98 | DA | | | 0.000±.005 | 100000 | PCB | | | | | | |

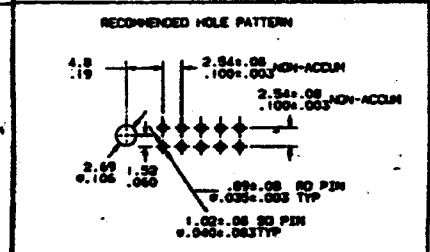

PRODUCT NO
SEE TABLE

| REV | DESCRIPTION | BY | DATE |
|-----|-------------|----|------|
| X | | | |



- NOTES:
- 1 WELDING MATERIAL, GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR: BLUE.
 - 2 TERMINAL MATERIAL, PHOSPHOR BRONZE.
 - 3 1° MAX DRAFT PERMITTED ON ALL SURFACES.
 - 4 SAME TOLERANCE APPLIES TO BOTH ENDS OF EACH TERMINAL.
 - 5 1.8 KG/4 LBS MIN TENSILE PULL-OUT FORCE.
 - 6 .13/.055 STEP AROUND MOUNTING HOLE.
 - 7 RECOMMENDED MOUNTING SCREW SIZE #2-36 FILLISTER HEAD
 4.75/.155 LONG FOR 1.54/.05 BOARD
 5.47/.20 LONG FOR 2.47/.05, 3.18/.155 BOARD
 - 8 ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
 - 9 IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN 05-02-008.
 - 10 THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

11. plating option. maybe either Gold or GXT plating at manufacturer's option.

| REV | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION |
|-----|------|----|-------------|------|----|-------------|------|----|-------------|------|----|-------------|
| | | | | | | | | | | | | |

| | | | | | | | | | |
|--------------|------|----|-------------|------|----|-------------|------|----|-------------|
| DO NOT SCALE | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION |
| | | | | | | | | | |


| | | | | | | | | | |
|------------|------|----|-------------|------|----|-------------|------|----|-------------|
| INSULATION | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION |
| | | | | | | | | | |

| | | | | | | | | | |
|---------------|------|----|-------------|------|----|-------------|------|----|-------------|
| CUSTOMER COPY | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION | DATE | BY | DESCRIPTION |
| | | | | | | | | | |

| | | | |
|--------------------------------|--------------------|------|-------------|
| FCJ | www.fcjconnect.com | | |
| HEADER, SLATSIDE, 0.50 IN L.W. | VERTICAL | | |
| DATE | TIME | BY | DESCRIPTION |
| 4/1 | 0 | 0852 | 0001 |

| PRODUCT NO | SIZE | DIM A | DIM B | DIM C | DIM D | DIM E | DIM J | TERM TYPE | TERM PLATING | STYLE |
|------------|------|-----------|-----------|-------------|-------------|-------------|------------|-----------|---|-------|
| 65692-001 | 2X5 | 24.17/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 2.67/.105 | 90 | .76 μ /30 μ "Au OVER 1.27/50 μ "Ni | A |
| -002 | | | | | | | 3.8/.15 | 90 | | |
| -003 | | | | | | | 17.15/.675 | 90 | | |
| -004 | | | | | | | 2.67/.105 | 90 | | |
| -005 | | | | | | | 3.8/.15 | 90 | 3.81 μ /150 μ " TIN | |
| -006 | 2X5 | 24.17/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 17.15/.675 | 90 | | A |
| -007 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 2.67/.105 | 90 | .76 μ /30 μ "Au OVER 1.27/50 μ "Ni | D |
| -008 | | | | | | | 3.8/.15 | 90 | | |
| -009 | | | | | | | 17.15/.675 | 90 | | |
| -010 | | | | | | | 2.67/.105 | 90 | | |
| -011 | | | | | | | 3.8/.15 | 90 | 3.81 μ /150 μ " TIN | |
| -012 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 17.15/.675 | 90 | | |
| -013 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.13/1.580 | 38.10/1.500 | 2.67/.105 | 90 | .76 μ /30 μ "Au OVER 1.27/50 μ "Ni | |
| -014 | | | | | | | 3.8/.15 | 90 | | |
| -015 | | | | | | | 17.15/.675 | 90 | | |
| -016 | | | | | | | 2.67/.105 | 90 | | |
| -017 | | | | | | | 3.8/.15 | 90 | 3.81 μ /150 μ " TIN | |
| -018 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.13/1.580 | 38.10/1.500 | 17.15/.675 | 90 | | |
| -019 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 2.67/.105 | 90 | .76 μ /30 μ "Au OVER 1.27/50 μ "Ni | |
| -020 | | | | | | | 3.8/.15 | 90 | | |
| -021 | | | | | | | 17.15/.675 | 90 | | |
| -022 | | | | | | | 2.67/.105 | 90 | | |
| -023 | | | | | | | 3.8/.15 | 90 | 3.81 μ /150 μ " TIN | |
| -024 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 17.15/.675 | 90 | | |
| -025 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 2.67/.105 | 90 | .76 μ /30 μ "Au OVER 1.27/50 μ "Ni | |
| -026 | | | | | | | 3.8/.15 | 90 | | |
| -027 | | | | | | | 17.15/.675 | 90 | | |
| -028 | | | | | | | 2.67/.105 | 90 | | |
| -029 | | | | | | | 3.8/.15 | 90 | 3.81 μ /150 μ " TIN | |
| 65692-030 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 17.15/.675 | 90 | | D |

| REVISION | | |
|----------|-------------|---------|
| REV | DESCRIPTION | BY DATE |
| 1 | | |

| | | | | |
|---|--|---|--|--|
| DATE 11/11/08 ISSUE 11/11/08 | | CUSTOMER COPY CODE IDENT 23884 | |  www.fcjconnect.com |
| SCALE 1:1 | | DATE 11/11/08 | | |
| OR NOT SCALE DRAWING YES | | DATE 11/11/08 | | TITLE HEADER, QUICKIE SLID LINE, VERTICAL |
| OR NOT SCALE DRAWING NO | | DATE 11/11/08 | | |
| TOLERANCE SHEETS REQUIRED | | DATE 11/11/08 | | DATE 11/11/08 |
| DATE 11/11/08 | | DATE 11/11/08 | | DATE 11/11/08 |

| PRODUCT NO | SIZE | DIM A | DIM B | DIM C | DIM D | DIM E | DIM J | TERM TYPE | TERM PLATING | STYLE | REVISIONS | | |
|------------|------|-----------|-----------|-------------|-------------|-------------|------------|-----------|---|-------|-----------|-------------|----|
| | | | | | | | | | | | REV | DESCRIPTION | BY |
| 65692-031 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 2.67/.105 | RD | | D | | | |
| -032 | | | | | | | 3.8/.15 | RD | .75 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | |
| -033 | | | | | | | 17.15/.675 | SO | | | | | |
| -034 | | | | | | | 2.67/.105 | SO | | | | | |
| -035 | | | | | | | 3.8/.15 | SO | 3.81 μ /150 μ * TIN | | | | |
| -036 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 17.15/.675 | SO | | D | | | |
| -037 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 2.67/.105 | RD | | C | | | |
| -038 | | | | | | | 3.8/.15 | RD | .75 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | |
| -039 | | | | | | | 17.15/.675 | SO | | | | | |
| -040 | | | | | | | 2.67/.105 | SO | | | | | |
| -041 | | | | | | | 3.8/.15 | SO | 3.81 μ /150 μ * TIN | | | | |
| -042 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 17.15/.675 | SO | | C | | | |
| -043 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 2.67/.105 | RD | | D | | | |
| -044 | | | | | | | 3.8/.15 | RD | .75 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | |
| -045 | | | | | | | 17.15/.675 | SO | | | | | |
| -046 | | | | | | | 2.67/.105 | SO | | | | | |
| -047 | | | | | | | 3.8/.15 | SO | 3.81 μ /150 μ * TIN | | | | |
| -048 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 17.15/.675 | SO | | D | | | |
| -049 | 2X5 | 26.1/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 3.8/.15 | RD | | A | | | |
| -050 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | | | | D | | | |
| -051 | 2X13 | 44.9/1.75 | 38.6/1.52 | 30.48/1.200 | 40.12/1.580 | 38.10/1.500 | | | | | | | |
| -052 | 2X17 | 54.6/2.15 | 48.8/1.92 | 45.64/1.600 | 50.29/1.980 | 48.26/1.900 | | | .75 μ /30 μ * GXT/GOLD FLASH | | | | |
| -053 | 2X20 | 62.3/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | | | | | | | |
| -054 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | | | | D | | | |
| -055 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | | | | C | | | |
| -056 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 3.8/.15 | RD | | D | | | |
| -057 | 2X30 | 87.6/3.45 | 81.8/3.22 | 73.66/2.900 | 83.31/3.280 | 81.28/3.200 | 2.67/.105 | RD | .75 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | |
| -058 | | | | | | | 3.8/.15 | RD | | | | | |
| -059 | | | | | | | 17.15/.675 | SO | | | | | |
| -060 | | | | | | | 2.67/.105 | SO | | | | | |
| -061 | | | | | | | 3.8/.15 | SO | 3.81 μ /150 μ * TIN | | | | |
| -062 | | | | | | | 17.15/.675 | SO | | | | | |
| -063 | | | | | | | 2.67/.105 | RD | | | | | |
| -064 | | | | | | | 3.8/.15 | RD | .75 μ /30 μ * GXT/GOLD FLASH | | | | |
| 65692-065 | 2X30 | 87.6/3.45 | 81.8/3.22 | 73.66/2.900 | 83.31/3.280 | 81.28/3.200 | 17.15/.675 | SO | | D | | | |

| REV | DESCRIPTION | BY | DATE |
|-----|-------------|----|------|
| 1 | | | |

| | | | | |
|---------------------------------------|-------|----------------------------|------|---------------|
| DATE | ISSUE | BY | DATE | CUSTOMER COPY |
| XXXX | XXXX | XXXX | XXXX | CODE IDENT |
| DO NOT SCALE DIMENSIONS | | UNLESS OTHERWISE SPECIFIED | | SIZE |
| 1:1 | | 100000 | | 1/8" X 1/2" |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | | FINISH | | 1/8" X 1/2" |
| FRACTIONS | | 100000 | | 1/8" X 1/2" |
| DECIMALS | | 100000 | | 1/8" X 1/2" |
| HOLE DIMENSIONS | | 100000 | | 1/8" X 1/2" |
| TAP DIMENSIONS | | 100000 | | 1/8" X 1/2" |
| HOLE DIMENSIONS | | 100000 | | 1/8" X 1/2" |
| TAP DIMENSIONS | | 100000 | | 1/8" X 1/2" |



WELL HEADERS, QUICKIE SLID LINE, VERTICAL

| PRODUCT NO | SIZE | DIM A | DIM B | DIM C | DIM D | DIM E | DIM J | TERM TYPE | TERM PLATING | STYLE | REVISIONS | | |
|------------|------|-----------|-----------|-------------|-------------|-------------|------------|-----------|-----------------------------|-------|-----------|-------------|----|
| | | | | | | | | | | | REV | DESCRIPTION | BY |
| 65692-066 | 2X5 | 24.17/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 2.67/.105 | RD | .76u/30u* GXT/GOLD FLASH | A | | | |
| -067 | 2X5 | 24.1/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 17.15/.675 | SO | | A | | | |
| -068 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 2.67/.105 | RD | | C | | | |
| -069 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 17.15/.675 | SO | | C | | | |
| -070 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 2.67/.105 | RD | | D | | | |
| -071 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 17.15/.675 | SO | | | | | |
| -072 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 2.67/.105 | RD | | | | | |
| -073 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 17.15/.675 | SO | | | | | |
| -074 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.12/1.580 | 38.10/1.500 | 2.67/.105 | RD | | | | | |
| -075 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.12/1.580 | 38.10/1.500 | 17.15/.675 | SO | | | | | |
| -076 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 2.67/.105 | RD | | | | | |
| -077 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 17.15/.675 | SO | | | | | |
| -078 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 2.67/.105 | RD | | | | | |
| -079 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 17.15/.675 | SO | | | | | |
| -080 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 2.67/.105 | RD | | | | | |
| -081 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 17.15/.675 | SO | | | | | |
| -082 | 2X5 | 24.1/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 2.67/.105 | RD | | A | | | |
| -083 | 2X5 | 24.1/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 3.8/.15 | RD | | A | | | |
| -084 | 2X5 | 24.1/.95 | 18.3/.72 | 10.16/.400 | 19.81/.780 | 17.78/.700 | 17.15/.675 | SO | | A | | | |
| -085 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 2.67/.105 | RD | | C | | | |
| -086 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 3.8/.15 | RD | | C | | | |
| -087 | 2X7 | 29.2/1.15 | 23.4/.92 | 15.24/.600 | 24.89/.980 | 22.86/.900 | 17.15/.675 | SO | | C | | | |
| -088 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 2.67/.105 | RD | | D | | | |
| -089 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 3.8/.15 | RD | | | | | |
| -090 | 2X8 | 31.8/1.25 | 25.9/1.02 | 17.78/.700 | 27.43/1.080 | 25.40/1.000 | 17.15/.675 | SO | | | | | |
| -091 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 2.67/.105 | RD | | | | | |
| -092 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 3.8/.15 | RD | | | | | |
| -093 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/.900 | 32.51/1.280 | 30.48/1.200 | 17.15/.675 | SO | | | | | |
| -094 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.12/1.580 | 38.10/1.500 | 2.67/.105 | RD | | | | | |
| -095 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.12/1.580 | 38.10/1.500 | 3.8/.15 | RD | | | | | |
| -096 | 2X13 | 44.5/1.75 | 38.6/1.52 | 30.48/1.200 | 40.12/1.580 | 38.10/1.500 | 17.15/.675 | SO | | | | | |
| -097 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 2.67/.105 | RD | | | | | |
| -098 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 3.8/.15 | RD | | | | | |
| -099 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 17.15/.675 | SO | | | | | |
| 65692-100 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 2.67/.105 | RD | | | | | |

.38u/15u*Au
OVER
1.27u/50u*Ni

CUSTOMER COPY
 www.fciconnect.com

DO NOT SCALE DRAWING
 SHEET 1 OF 1
 DATE 1/1/08
 DRAWN BY: J. B. BROWN
 CHECKED BY: J. B. BROWN
 APPROVED BY: J. B. BROWN
 TITLE: CUSTOMER COPY
 PART: 65692-100
 QTY: 1/1
 DATE: 1/1/08
 SHEET: 5

©2007 FCI. This drawing is the property of FCI and contains proprietary information. It is to be used for the manufacture of the product only and is not to be used for any other purpose without the express written consent of FCI. Reproduction, distribution, or use of this drawing is prohibited.

| | | | | | | | | | | REVISIONS | | | | |
|------------|------|-----------|-----------|-------------|-------------|-------------|------------|-----------|--------------------------------------|--------------------------------------|-----|-------------|----|------|
| PRODUCT NO | SIZE | DIM A | DIM B | DIM C | DIM D | DIM E | DIM J | TERM TYPE | TERM PLATING | STYLE | REV | DESCRIPTION | BY | DATE |
| 65692-101 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 3.8/.15 | RD | .38µ/15µ" Au OVER 1.27µ/50µ"Ni | D | | | | |
| -102 | 2X20 | 62.2/2.45 | 56.4/2.22 | 48.26/1.900 | 57.91/2.280 | 55.88/2.200 | 17.15/.675 | SO | | | | | | |
| -103 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 2.67/.105 | RD | | | | | | |
| -104 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 3.8/.15 | RD | | | | | | |
| -105 | 2X25 | 74.9/2.95 | 69.1/2.72 | 60.96/2.400 | 70.61/2.780 | 68.58/2.700 | 17.15/.675 | SO | | | | | | |
| -106 | 2X30 | 87.6/3.45 | 81.8/3.22 | 73.66/2.900 | 83.31/3.280 | 81.28/3.200 | 2.67/.105 | RD | | | | | | |
| -107 | 2X30 | 87.6/3.45 | 81.8/3.22 | 73.66/2.900 | 83.31/3.280 | 81.28/3.200 | 3.8/.15 | RD | | | | | | |
| -108 | 2X30 | 87.6/3.45 | 81.8/3.22 | 73.66/2.900 | 83.31/3.280 | 81.28/3.200 | 17.15/.675 | SO | | | | | | |
| -109 | 2X5 | 24.1/1.95 | 18.3/1.72 | 10.16/1.400 | 19.81/1.780 | 17.78/1.700 | 2.67/.105 | RD | | .76µ/30µ" Au OVER 1.27µ/50µ"Ni | B | | | |
| -110 | | | | | | | 3.8/.15 | RD | | | | | | |
| -111 | | | | | | | 17.15/.675 | SO | | | | | | |
| -112 | | | | | | | 2.67/.105 | SO | 3.81µ/150µ" TIN | | | | | |
| -113 | | | | | | | 3.8/.15 | SO | | | | | | |
| -114 | | | | | | | 17.15/.675 | SO | | | | | | |
| -115 | | | | | | | 2.67/.105 | RD | | | | | | |
| -116 | | | | | | | 3.8/.15 | RD | .38µ/15µ" Au OVER 1.27µ/50µ"Ni | | | | | |
| -117 | | | | | | | 17.15/.675 | SO | | | | | | |
| -118 | | | | | | | 2.67/.105 | RD | | | | | | |
| -119 | | | | | | | 3.8/.15 | RD | .76µ/30µ" GXT/GOLD FLASH | | | | | |
| 65692-120 | 2X5 | 24.1/1.95 | 18.3/1.72 | 10.16/1.400 | 19.81/1.780 | 17.78/1.700 | 17.15/.675 | SO | | B | | | | |
| 65692-121 | | OBSOLETE | | | | | | | | | | | | |
| 65692-216 | | OBSOLETE | | | | | | | | | | | | |
| 65692-217 | 2X12 | 41.9/1.65 | 36.1/1.42 | 27.94/1.100 | 37.59/1.480 | 35.56/1.400 | 2.67/.105 | RD | .38µ/15µ" Au OVER 1.27µ/50µ"Ni | D | | | | |
| -218 | | | | | | | 3.81/.150 | SO | | | | | | |
| -219 | | | | | | | 17.15/.675 | SO | | | | | | |
| -220 | | | | | | | 2.67/.105 | RD | | | | | | |
| -221 | | | | | | | 3.81/.150 | RD | .76µ/30µ" Au OVER 1.27µ/50µ"Ni | | | | | |
| -222 | | | | | | | 17.15/.675 | SO | | | | | | |
| -223 | | | | | | | 2.67/.105 | RD | | | | | | |
| -224 | | | | | | | 3.81/.150 | RD | .76µ/30µ" GXT/Au FLASH | | | | | |
| -225 | | | | | | | 17.15/.675 | SO | | | | | | |
| -226 | | | | | | | 2.67/.105 | SO | | | | | | |
| -227 | | | | | | | 3.81/.150 | SO | 3.81µ/150µ" TIN | | | | | |
| 65692-228 | 2X12 | 41.9/1.65 | 36.1/1.42 | 27.94/1.100 | 37.59/1.480 | 35.56/1.400 | 17.15/.675 | SO | | D | | | | |

| | | | | | | | | | | | | | | | |
|--------------|--|-----------------|--|-------|--|--------|--|---------------|--|------------|--|--------|--|--|--|
| SHEET NUMBER | | TIME | | DATE | | JOB NO | | CUSTOMER COPY | | CODE IDENT | | DATE | | | |
| | | | | | | | | 22886 | | 1/8/98 | | | | | |
| DRAWN | | | | BY | | | | DATE | | | | SCALE | | | |
| XXXX | | | | XXXX | | | | 1/8/98 | | | | 1/8/98 | | | |
| MATERIALS | | SHEETS REQUIRED | | SHEET | | NO | | UNIT | | REVISION | | DATE | | | |
| | | | | | | | | | | | | | | | |



WELL HEADER, QUICKIE SLID L.I.N.E. VERTICAL

| PRODUCT NO | SIZE | DIM A | DIM B | DIM C | DIM D | DIM E | DIM J | TERM TYPE | TERM PLATING | STYLE | REVISIONS | | | | | | | | | | | | |
|------------|------|---|-----------|-------------|-------------|-------------|------------|-----------|---|-------|-----------|-------------|----|------|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | REV | DESCRIPTION | BY | DATE | | | | | | | | | |
| 65692-229 | 2X15 | 49.5/1.95 | 43.7/1.72 | 35.56/1.400 | 45.21/1.780 | 43.18/1.700 | 2.67/.105 | RD | .38 μ /15 μ *Au OVER 1.27 μ /50 μ *Ni | D | | | | | | | | | | | | | |
| -230 | | | | | | | 3.81/.150 | RD | | | | | | | | | | | | | | | |
| -231 | | | | | | | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -232 | | | | | | | 2.67/.105 | RD | | | | | | | | | | | | | | | |
| -233 | | | | | | | 3.81/.150 | RD | .76 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | | | | | | | | | | | |
| -234 | | | | | | | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -235 | | | | | | | 2.67/.105 | RD | | | | | | | | | | | | | | | |
| -236 | | | | | | | 3.81/.150 | RD | .76 μ /30 μ * GXT/Au FLASH | | | | | | | | | | | | | | |
| -237 | | | | | | | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -238 | | | | | | | 2.67/.105 | SO | | | | | | | | | | | | | | | |
| -239 | | | | | | | 3.81/.150 | SO | 3.81 μ /150 μ * TIN | | | | | | | | | | | | | | |
| -240 | 2X15 | 49.5/1.95 | 43.7/1.72 | 35.56/1.400 | 45.21/1.780 | 43.18/1.700 | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -241 | 2X22 | 67.3/2.65 | 61.5/2.42 | 53.34/2.100 | 62.99/2.480 | 60.96/2.400 | 2.67/.105 | RD | .38 μ /15 μ *Au OVER 1.27 μ /50 μ *Ni | | | | | | | | | | | | | | |
| -242 | | | | | | | 3.81/.150 | RD | | | | | | | | | | | | | | | |
| -243 | | | | | | | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -244 | | | | | | | 2.67/.105 | RD | | | | | | | | | | | | | | | |
| -245 | | | | | | | 3.81/.150 | RD | .76 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | | | | | | | | | | | |
| -246 | | | | | | | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -247 | | | | | | | 2.67/.105 | RD | | | | | | | | | | | | | | | |
| -248 | | | | | | | 3.81/.150 | RD | .76 μ /30 μ * GXT/Au FLASH | | | | | | | | | | | | | | |
| -249 | | | | | | | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -250 | | | | | | | 2.67/.105 | SO | | | | | | | | | | | | | | | |
| -251 | | | | | | | 3.81/.150 | SO | 3.81 μ /150 μ * TIN | | | | | | | | | | | | | | |
| -252 | 2X22 | 67.3/2.65 | 61.5/2.42 | 53.34/2.100 | 62.99/2.480 | 60.96/2.400 | 17.15/.675 | SO | | | | | | | | | | | | | | | |
| -253 | 2X5 | 24.1/1.95 | 18.3/1.72 | 18.16/1.400 | 19.81/1.780 | 17.78/1.700 | 2.67/.105 | SO | .76 μ /30 μ *Au OVER 1.27 μ /50 μ *Ni | | | | | | | | | | | | | | |
| -254 | 2X10 | 36.8/1.45 | 30.9/1.22 | 22.86/1.900 | 32.51/1.280 | 30.48/1.200 | 2.67/.105 | SO | | | | | | | | | | | | | | | |
| -255 | 2X17 | 54.6/2.15 | 48.8/1.92 | 40.64/1.600 | 50.29/1.980 | 48.26/1.900 | 2.67/.105 | SO | | | | | | | | | | | | | | | |
| -256 | 2X5 | CUSTOMER RESTRICTED CUSTOMER RESTRICTED | | | | | | | | | | | | | | | | | | | | | |
| -257 | 2X10 | | | | | | | | | | | | | | | | | | | | | | |
| -258 | 2X20 | | | | | | | | | | | | | | | | | | | | | | |
| -259 | 2X10 | | | | | | | | | | | | | | | | | | | | | | |
| -260 | 2X17 | | | | | | | | | | | | | | | | | | | | | | |
| -261 | 2X20 | | | | | | | | | | | | | | | | | | | | | | |
| -262 | 2X17 | | | | | | | | | | | | | | | | | | | | | | |
| 65692-263 | 2X5 | | | | | | | | | | | | | | | | | | | | | | |

| REVISIONS | | | |
|-----------|-------------|----|------|
| REV | DESCRIPTION | BY | DATE |
| ✓ | | | |

| | | | | | | | | | | | | | | | | |
|---|-------|-------|------|------------|-----------|------|----|------|-------|--|------------|------------------------------|------|----|------|-------|
| DATE | TABLE | SCALE | UNIT | NO. SHEETS | SHEET NO. | DATE | BY | CHKD | APP'D | CUSTOMER COPY | CODE IDENT | REVNO | DATE | BY | CHKD | APP'D |
| | | | | | | | | | | | | | | | | |
| DO NOT SCALE DIMENSIONS ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED ANGLES IN DEGREES | | | | | | | | | | TITLE HEADER, QUICKIE SLIM LINE, VERTICAL | | SCALE 1/1 D 65692 SHEET 7 | | | | |



| PRODUCT NO | SIZE | DIM A | DIM B | DIM C | DIM D | DIM E | DIM J | TERM TYPE | TERM PLATING | STYLE |
|------------|------|---------------------|-------|-------|-------|-------|-------|-----------|--------------|-------|
| 65692-264 | 2X5 | CUSTOMER RESTRICTED | | | | | | | | |
| 65692-265 | 2X13 | CUSTOMER RESTRICTED | | | | | | | | |

| REV | DESCRIPTION | BY | DATE |
|-----|-------------|----|------|
| V | | | |

| | | | | | | | | | | | | | | | | | | | |
|------------------|--|------------|--|--------------------|--|------------|--|----------------|--|---------------|--|----------------|--|------------|--|---------------|--|------------------|--|
| SHEET NO: 1 | | TITLE: [] | | DATE: [] | | DRAWN: [] | | CHECKED: [] | | APPROVED: [] | | DATE: [] | | SCALE: [] | | SHEET NO: [] | | SHEET TOTAL: [] | |
| MATERIAL: [] | | | | QUANTITY: [] | | | | UNIT: [] | | | | PRICE: [] | | | | | | | |
| DESCRIPTION: [] | | | | SPECIFICATION: [] | | | | REVISIONS: [] | | | | APPROVALS: [] | | | | | | | |



Use this grid as the number of and columns preliminary layout of the layout sheet.
 The part of the layout sheet on this grid may be used to do any other the various means of OPERATIONAL, the following, etc.