

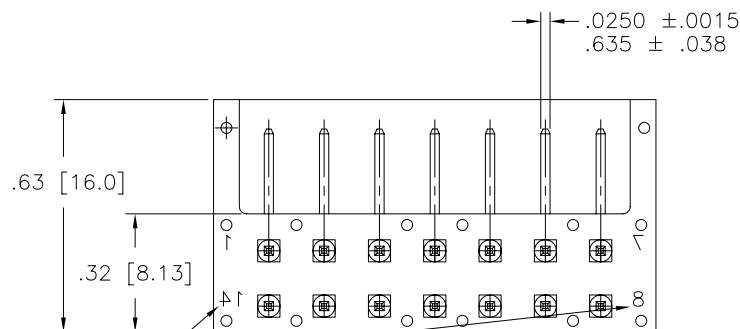


PRODUCT NO.
65695-001

NOTE 5

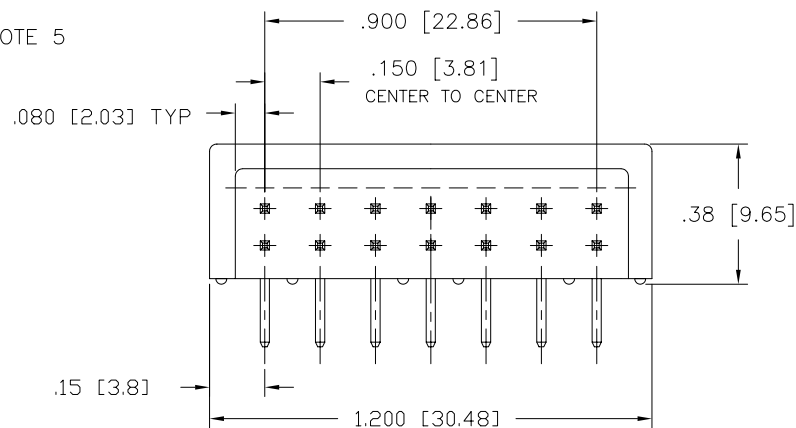


.06/1.5 HIGH
CHARACTERS LOCATED
ON FAR SIDE (4X)

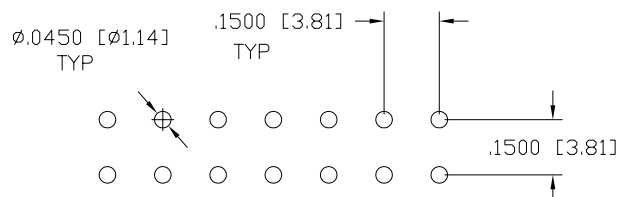

RECOMMENDED HOLE PATTERN

NOTES:

1. MOLDING MAT'L:
GLASS FILLED POLYESTER FLAME
RETARDANT PER UL-94-V-0
COLOR - BLACK
2. TERMINAL MATERIAL:
.025 [0.64] SQUARE 3/4 HARD
PHOSPHOR BRONZE
PLATING:
.000150/.00038 THICK Sn
OPTIONAL PLATING ON SWAGEL TIPS.
3. .05 MAX FLASH PERMISSIBLE AROUND
TERMINAL
4. .03/.76 MAX FLASH PERMISSIBLE AROUND
TERMINAL
5. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR
LEAD FREE OPTION.
6. IF "LF" P/N THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
7. HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE THE
FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm
MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.
8. THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS
NOT BEEN TESTED FOR WISKER GROWTH IN ALL INTERCONNECT ENVIROMENTS.

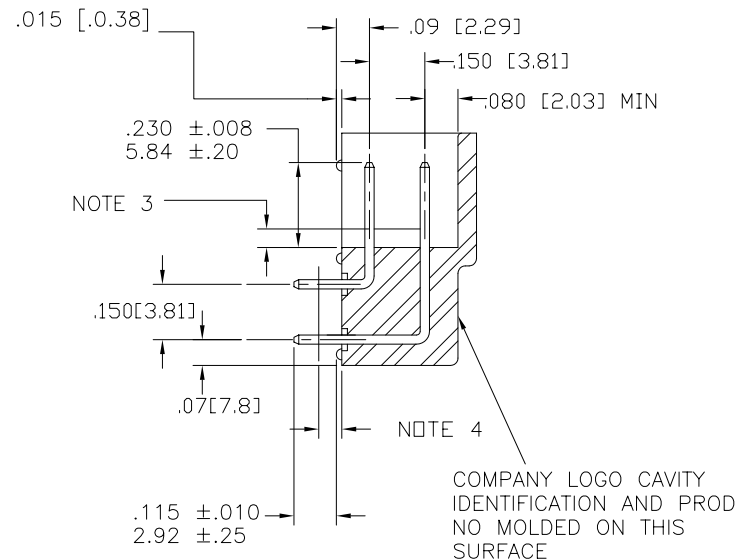

NOTE 3

NOTE 4

COMPANY LOGO CAVITY
IDENTIFICATION AND PROD
NO MOLDED ON THIS
SURFACE

mat'l. code				surface		tolerance		projection		product family											
NOTE 2				ISO 1302 ✓		ISO 406 ISO 1101				HEADER											
				tolerances unless otherwise specified						title											
ltr		ecn no		dr		date		angles		linear		.XX±.01/.3		INCH/MM		2x7 RIGHT ANGLE HEADER					
C		V03-0413		GJP		4/15/03															
D		M05-0167		ERE		7/23/05															
E		M07-0116		AGS		2/19/07		0°±2'								scale 1:1					
								dr		S. ROYER		2/14/97				dwg no		sheet 1 of 1		size	
								enrg		L. FYE		2/14/97				65695				A.	
								chr		L. FYE		2/14/97									
								appd		L. FYE		2/14/97									
sheet index		revision		C														type		Product Customer Drawing	
		sheet		1																	

form: A3