
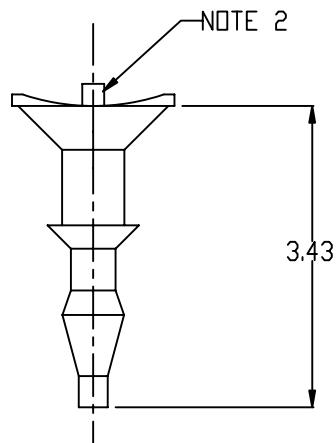


PRODUCT NO.
65762-001

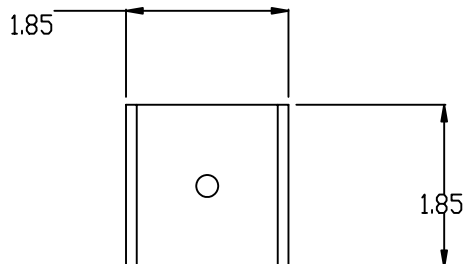

NOTES:

1. PRESS PLUG INTO PIN LEAD-IN OF HOUSING CAVITY AND BREAK OFF CARRIER.
2. 0.010/0.254 MAX. GATE PROTRUSION WHEN BROKEN FROM CARRIER.
3. MATERIAL: NYLON
4. MOLDED IN GROUPS OF 10 ATTACHED TO CARRIER.
5. THE P/N WITH "LF" SUFFIX IS LEAD FREE PART NUMBER;
6. THE PACKAGING FOR THE LEAD FREE P/N MEETS GS-14-920 SPECIFICATION;
7. FOR LEAD FREE P/N, THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRYREGULATION AS DESCRIBED IN GS-22-008;
8. FOR LEAD FREE P/N, THE PART WILL WITHSTAND EXPOSURE TO 260 DEGREE C, FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

nat'l code NYLON TYPE 6-6 WHITE				tolerances unless otherwise specified		CUSTOMER		A FCI www.fciconnect.com	
itr	ecn no.	dr	date		.XX ± .01 /XX±2	COPY			
A	ADD LATCH	DH	2-4-76	linear	.XXX ± .005 /XX±13	projection		title	
B	APPROVED	DEW	2-10-76		.XXX ± .0020 /XXX±.051	INCH/MM		QUICKIE POLARIZING PLUG	
C	V00806	DAI	4-18-00	angles	0° ± 2°	scale		product family QUICKIE	
D	N05-0329	DT	12/09/05	dr	DH 2-18-91	12:1		code	
				engr	T.EIKENBORDE 2-18-91			size	
				chr	M.MALTZE 2-18-91			dwg no	
				appd	F.WILDING 2-18-91			A 65762	
sheet index	revision	D						sheet	
	sheet	1						1 of 1	

Pro/E

cage code 22526