

6600 Series Thermostat

The Airpax 6600 series is a RoHS compliant, positive snap action, single pole / single throw, sub-miniature bimetallic thermostat which provides accurate and reliable sensing and switching in a single device.



The 6600 series thermostat dimensionally conforms to the international product package standard 8-pin DIP (N8A Dual Inline Package). The 6600 is ideally suited for use on printed circuit boards. Its size and shape conserves space on crowded PC boards and can be installed using auto-insertion equipment. The device is sealed to withstand wave soldering and board washing operations.

The 6600 provides fast, positive response with excellent repeatability. The thermostat has a switch capability of up to 1 amp for 48 VDC or 120 VAC for 30,000 cycles, and achieves low-level switching down to 0.001 A to 0.020 A at 5 VDC for 100,000 cycles. Temperature is pre-set at the factory and is non-adjustable in the field.

Applications include computers and computer peripherals, aircraft, automotive and test equipment. Typical uses include turning on an indicator light, sounding an audible alarm, switch on a control circuit to send a message to a display screen or even switching a circuit to shut down a system.

The 6600 thermostat is temperature tested in a computer controlled automated test equipment air-oven. Due to the ideal conditions under which it is tested, independent customer testing may be necessary to ensure that the correct calibration is utilized in the application.

It is the customer's responsibility to determine whether the product is proper for customer's use and application.

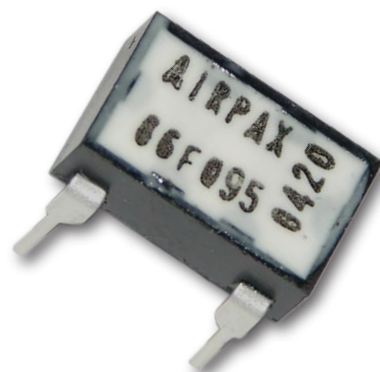

AIRPAX

© Copyright 1999-2007 Airpax • All Rights Reserved • 245-500-6006 • 0607

SPECIFICATIONS

■ Contact Resistance:

50 milliohms max (before and after rated life)

■ Contact Ratings:

Approved per VDE 0631/12.83

Cycles	Voltage	Amps (resistive)
30,000	48 VDC Test, Class I	1.0
30,000	120 VAC Test, Class I	1.0
100,000	5 VDC Test, Class II	0.020

Approved per cRUus E36687

Cycles	Voltage	Amps (resistive)
30,000	48 VDC	1.0
30,000	120 VAC	1.0
100,000	5 VDC	0.020
100,000	5 VDC	0.001

■ Contact Operations:

Either close on rise (make) or open on rise (break)

■ Operating Temperature Range:

40°C to 130°C (104°F to 266°F)

■ Standard Operating Temperature Tolerance: ±5°C (±9°F)

nominal operating temperature settings in 5°C increments

■ Long Term Exposure Limit:

-55°C to 160°C (-67°F to 320°F)

■ Dielectric Strength:

1480 VAC 60Hz, 1 second duration terminals to case

■ Insulation Resistance: 100 Mohms at 500 VDC

■ Contact Bounce (make): 3 milliseconds max

■ Seal: Epoxy sealed for wave soldering and cleaning, moisture proof per Airpax specification S-722 (unit will not leak while submerged in 9" of water for a minimum of two minutes)

■ Vibration: Per Mil-Std-202, method 204D, test condition D, 10 to 2,000 Hz

■ Shock: Per Mil-Std-202, method 213, test condition C, 100 G's for 6 millisecond duration, 1/2 sine wave

■ Chemical Resistance: Unit is resistance to water, salt, alcohol, ammonia, trichlorethane and most other organic solvents

■ US Patent Number: 4,620,175

■ Weight: Approximately 0.45 grams

■ Resistance to Soldering Heat:

Per Mil-Std-202G, method 210F, test condition C & K, test condition also validated at 260°C for 25 seconds

■ Agency Approvals:

cRUus recognized E36687
VDE approval 0631/12.83

■ RoHS Compliance:

RoHS compliant per EU Directive 2002/95/EC

MATERIALS


■ Seal: High temperature epoxy

■ Base: PPS (Polyphenylene Sulfide), 94 VO rated


■ Terminals: 65% Copper, 18% Nickel

■ Contacts: Gold overlay, silver crossbar

Standard 8 PIN DIP Configuration:

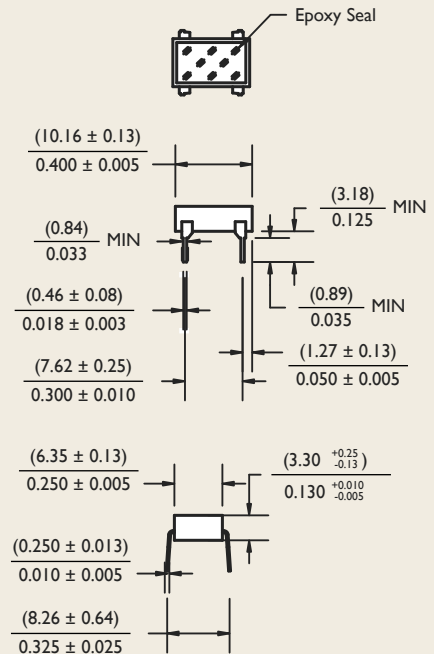

Surface Mount (Gullwing, SMT) Configuration:

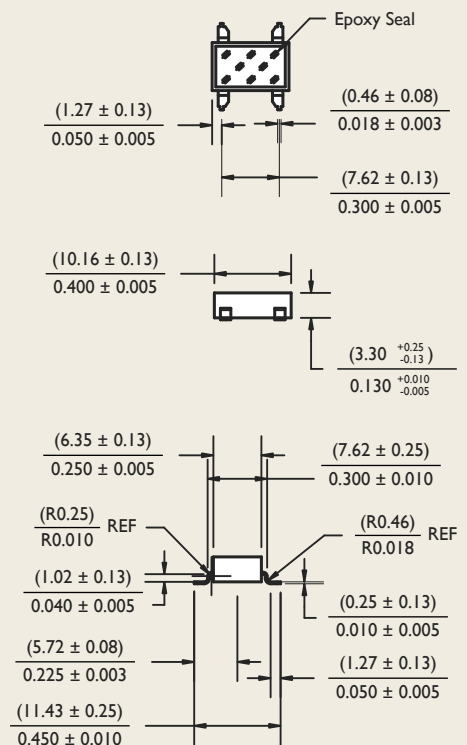

(millimeters)
inches

6600 Series Standard Temperature Calibrations

OPERATE ($\pm 5^{\circ}\text{C}$)	MIN DIFFERENTIAL ($^{\circ}\text{C}$)	MIN RESET ($^{\circ}\text{C}$)
40	4	20
45	4	20
50	4	30
55	4	30
60	4	40
65	4	40
70	4	50
75	4	50
80	6	55
85	6	55
90	6	60
95	6	60
100	6	70
105	6	70
110	6	80
115	6	85
120	9	90
125	9	90
130	9	90



HOW TO USE THIS CHART


Each thermostat part number consists of functional “building blocks” to enable the user to specify clearly and precisely the desired characteristics in each category. Select the proper code in each category, then transfer it to the box indicated. Unless a special requirement is indicated, the part number will be complete when the proper temperature is selected. If you have a special requirement, please call Airpax for a factory assigned number to complete the part number.

Example 1:


A 66F095 thermostat will close (make contact) on a rising temperature from 90°C to 100°C and will reset open (break contact) on a falling temperature within a window of no greater than 6°C lower than the actual close temperature and no less than 60°C ambient temperature.

Special requirements require a 4 digit manufacturing dash number for ordering special features, 4 digit marking may not appear as part of the marking on the thermostat.

Special requirements may include VDE, $\pm 3.0^{\circ}\text{C}$ ($\pm 5.4^{\circ}\text{F}$) operating temperature tolerance, surface mount (gullwing, SMT), tape and reel (750 pieces per reel, requires part be surface mount).

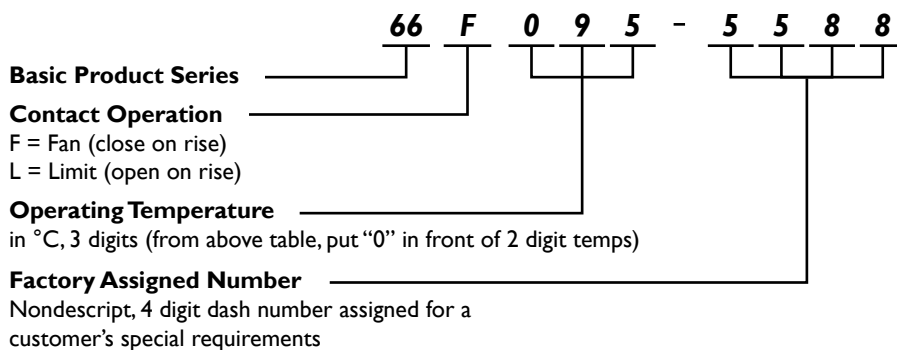

Temperature set point calibration is checked at Airpax with precision test equipment traceable to the US National Institute of Standards and Technology and Proven Methods. Because customer checking methods may differ, a typical variance allowed for correlation is $\pm 1.1^{\circ}\text{C}$ ($\pm 2.0^{\circ}\text{F}$).

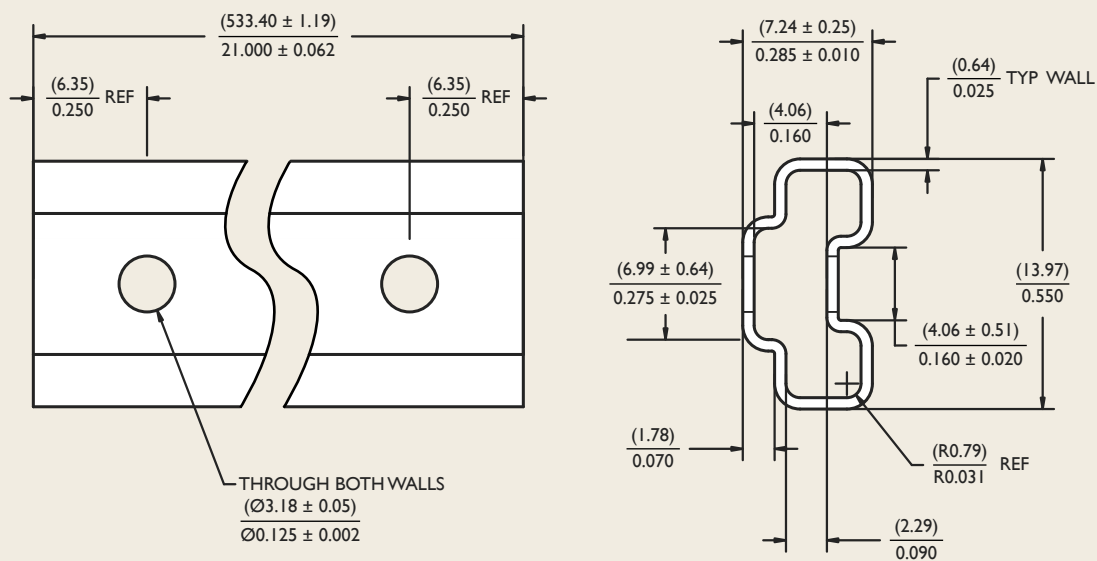

Standard Packaging

Standard and surface mount samples and production orders will be shipped in plastic, industry standard DIP shipping tubes.

This information is subject to change without notice

*(millimeters)
inches*

AIRPAX
www.airpax.net