



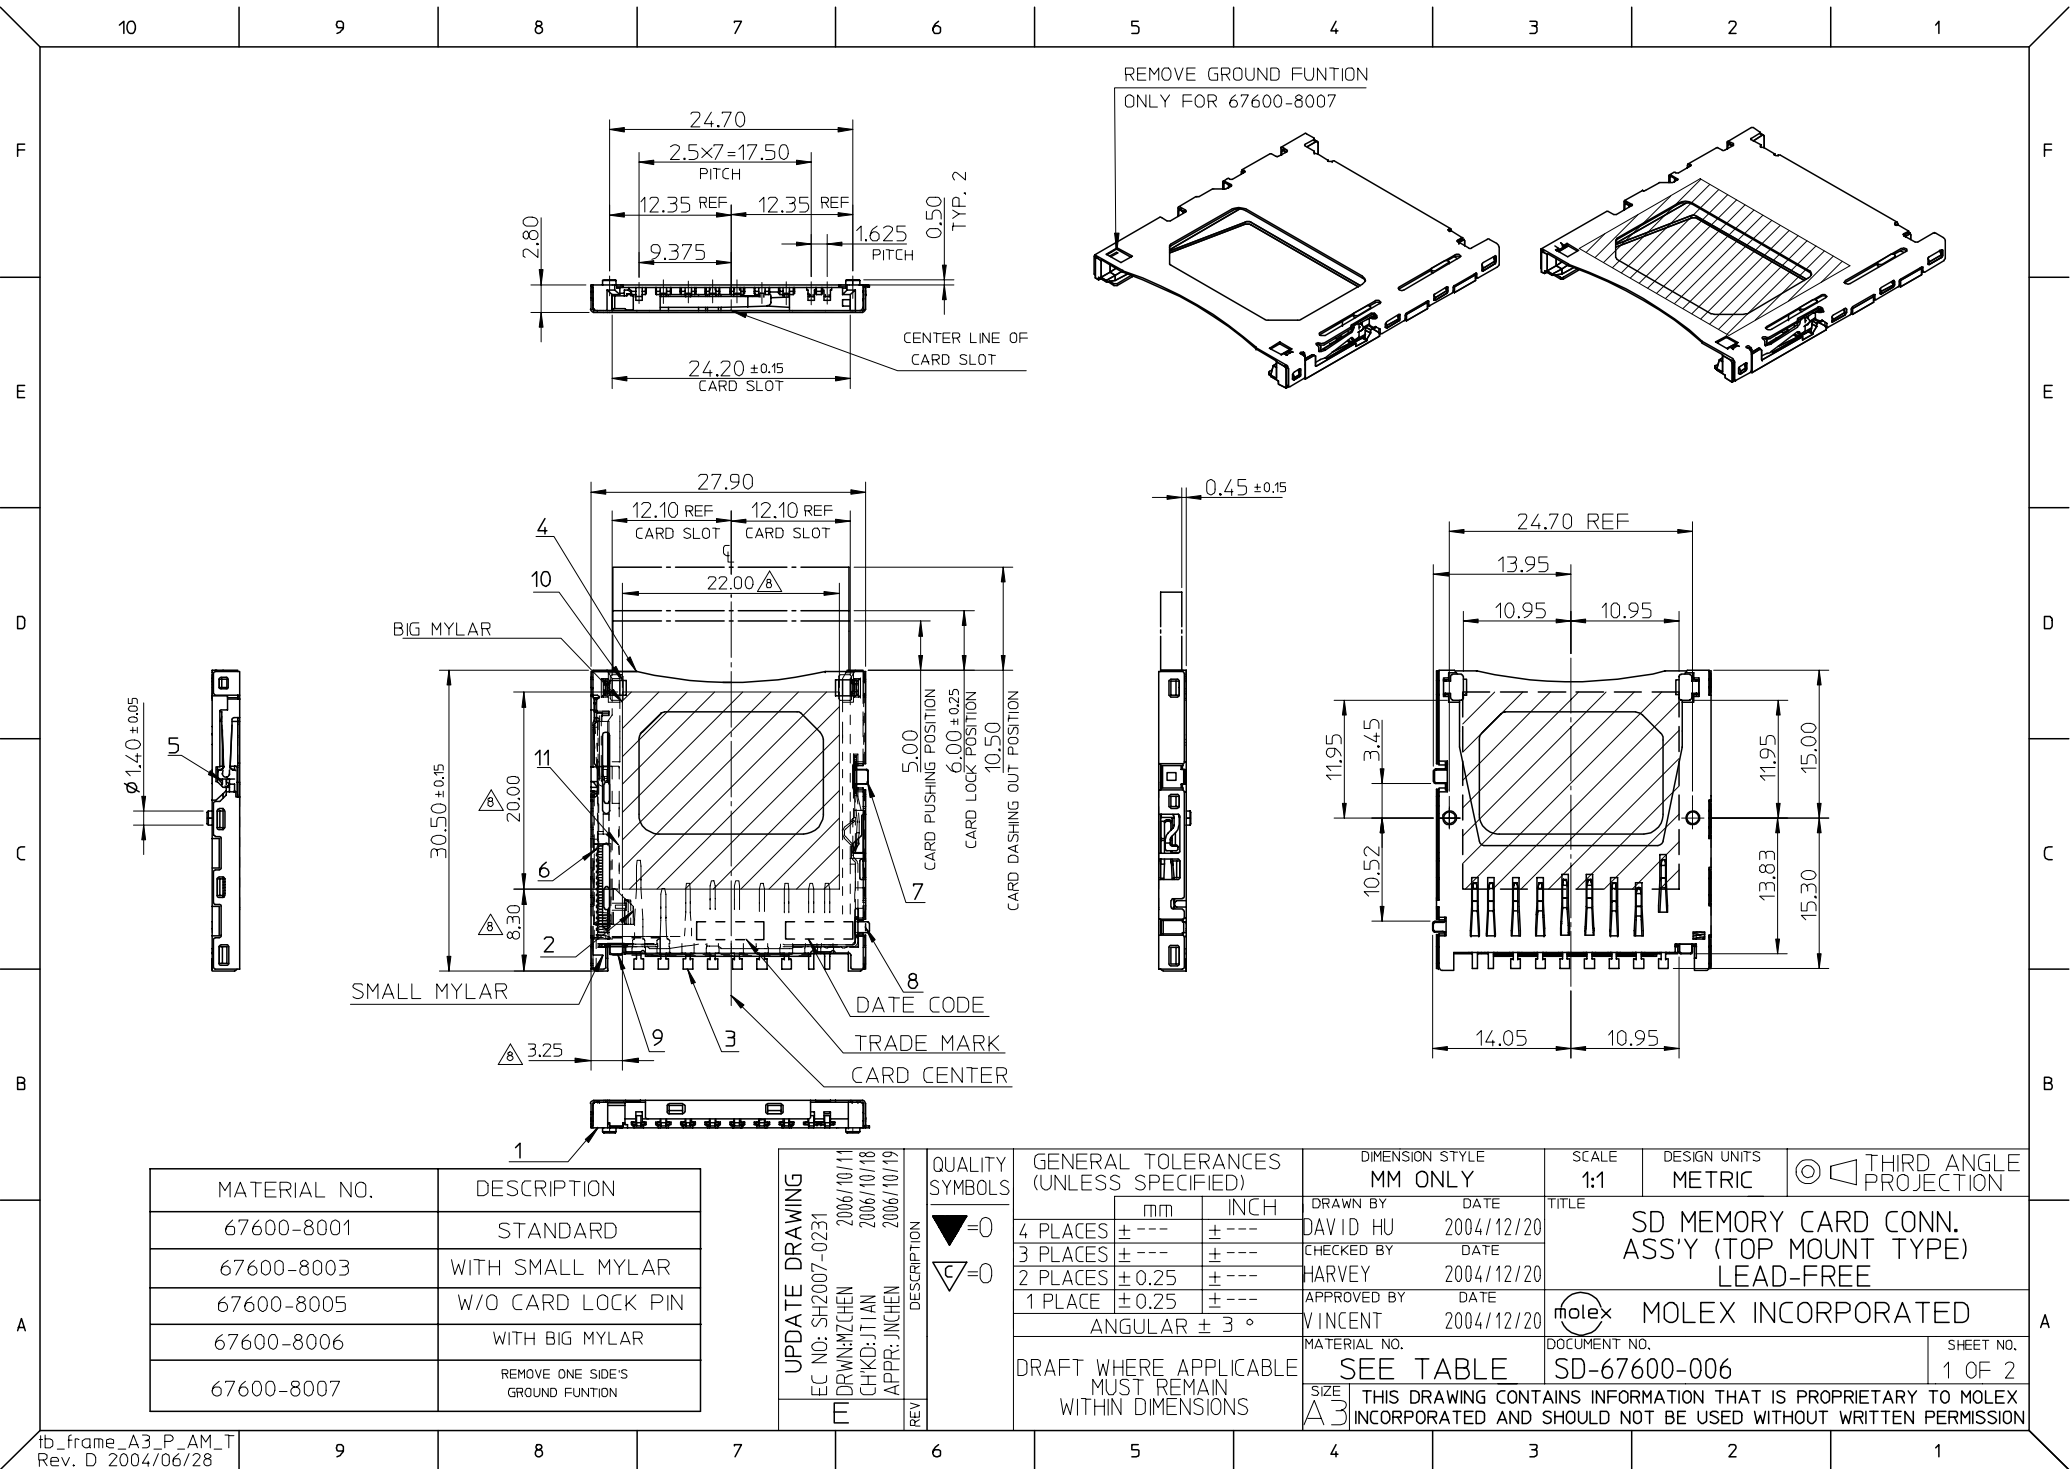

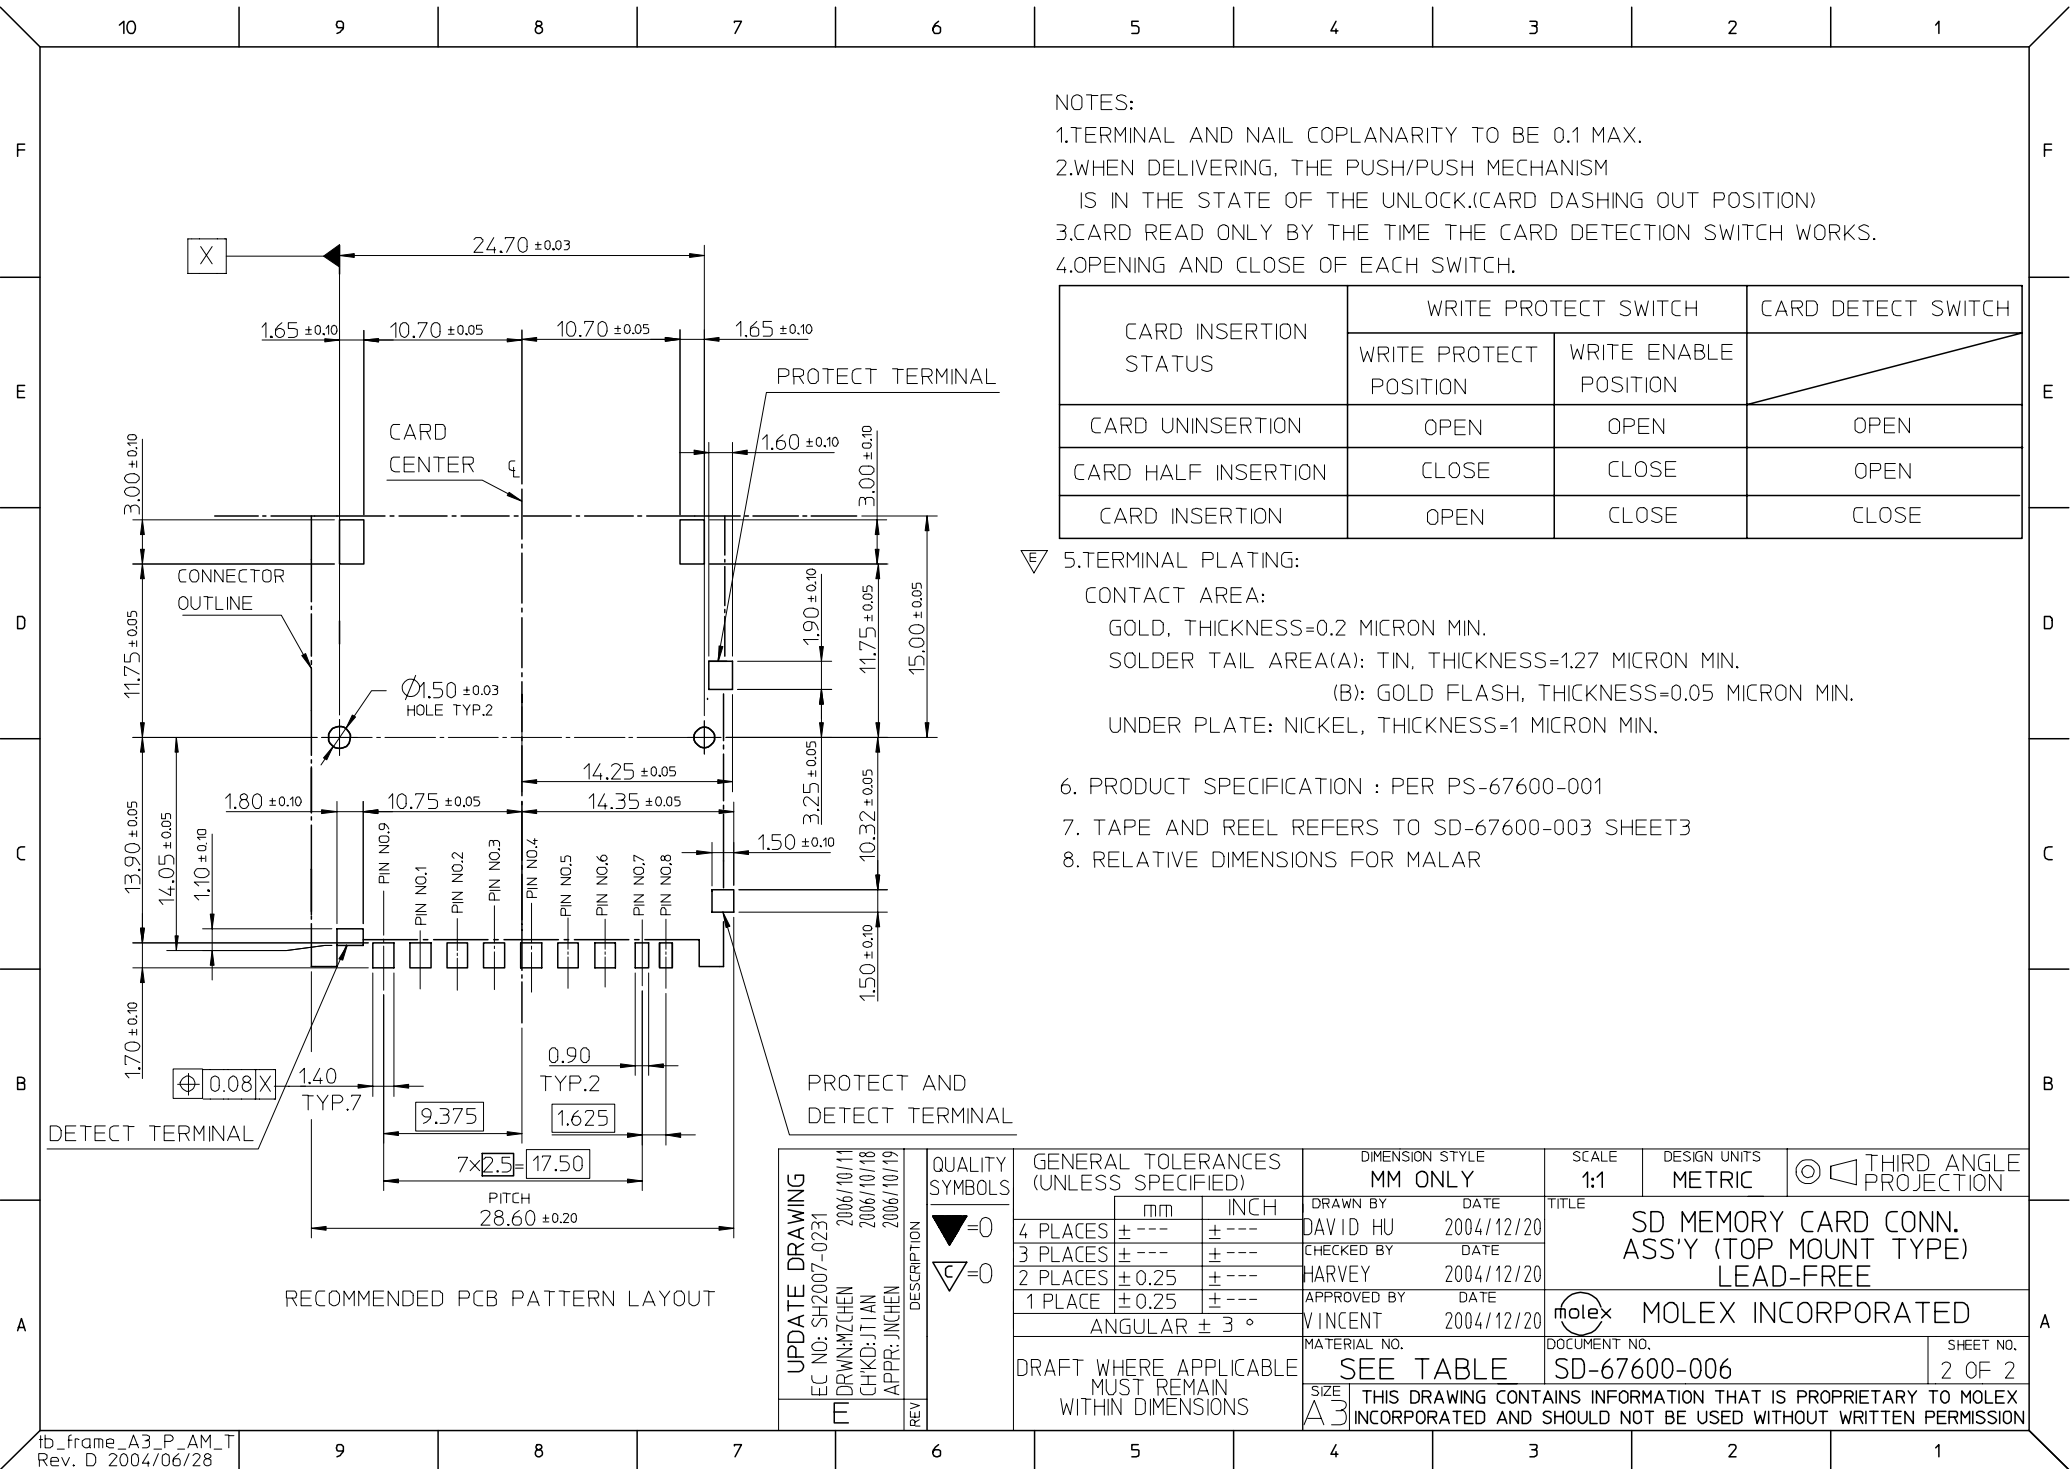

NOTES:

1. TERMINAL AND NAIL COPLANARITY TO BE 0.1 MAX.
2. WHEN DELIVERING, THE PUSH/PUSH MECHANISM IS IN THE STATE OF THE UNLOCK (CARD DASHING OUT POSITION)
3. CARD READ ONLY BY THE TIME THE CARD DETECTION SWITCH WORKS.
4. OPENING AND CLOSE OF EACH SWITCH.

CARD INSERTION STATUS	WRITE PROTECT SWITCH		CARD DETECT SWITCH
	WRITE PROTECT POSITION	WRITE ENABLE POSITION	
CARD UNINSERTION	OPEN	OPEN	OPEN
CARD HALF INSERTION	CLOSE	CLOSE	OPEN
CARD INSERTION	OPEN	CLOSE	CLOSE

5. TERMINAL PLATING:

CONTACT AREA:

- GOLD, THICKNESS=0.2 MICRON MIN.
- SOLDER TAIL AREA(A): TIN, THICKNESS=1.27 MICRON MIN.
- (B): GOLD FLASH, THICKNESS=0.05 MICRON MIN.
- UNDER PLATE: NICKEL, THICKNESS=1 MICRON MIN.

6. PRODUCT SPECIFICATION : PER PS-67600-001
7. TAPE AND REEL REFERS TO SD-67600-003 SHEET3
8. RELATIVE DIMENSIONS FOR MALAR