
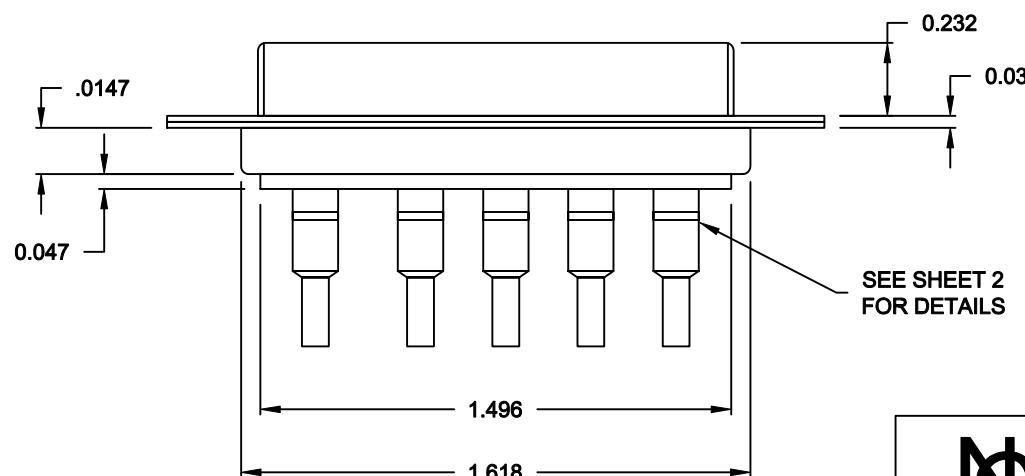


DESCRIPTION: COAXIAL - SOLDER CUP - FEMALE

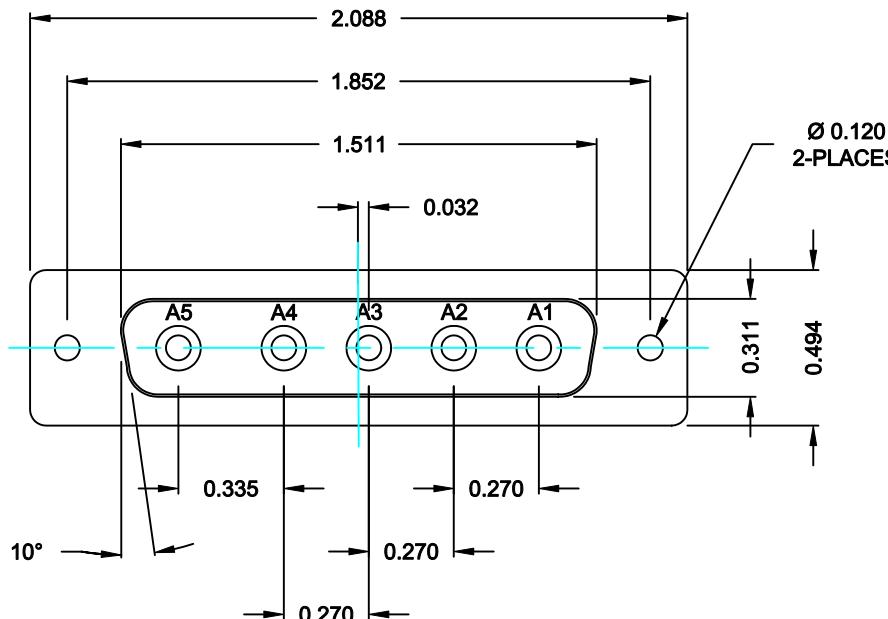

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 Milliohms Max.
COAXIAL PINS: 75 OHM

5,000 MegOHMS Min.
1,000VAC r.m.s.
-55° C ~ +125° C
30 Milliohms Max.
75 OHM

MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:

CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL

FINISH:

SHELL: NICKEL

6825W5203L001

00 = 75 OHM COAXIAL

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 09-21-06


CHECKED: X DATE: X

SCALE: N.T.S. SHEET OF 1 2 REV 1

DWG NO. 6825W5203L001

NorComp

NOTE:
COAXIAL CONTACTS SUPPLIED - NOT PRE-LOADED.

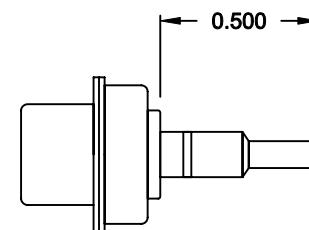

COAXIAL CONTACT
ACCEPTS 75 OHM COAX, RG179/U

SOLID CENTER PIN



FEMALE COAXIAL CONTACT

HOLLOW CENTER PIN



MALE COAXIAL CONTACT

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 09-21-06

CHECKED: X DATE: X

SCALE: N.T.S. SHEET OF 2 2 REV 1

DWG NO. 6825W5203L001

NorComp