


DESCRIPTION: COAXIAL - RIGHT ANGLE - FEMALE

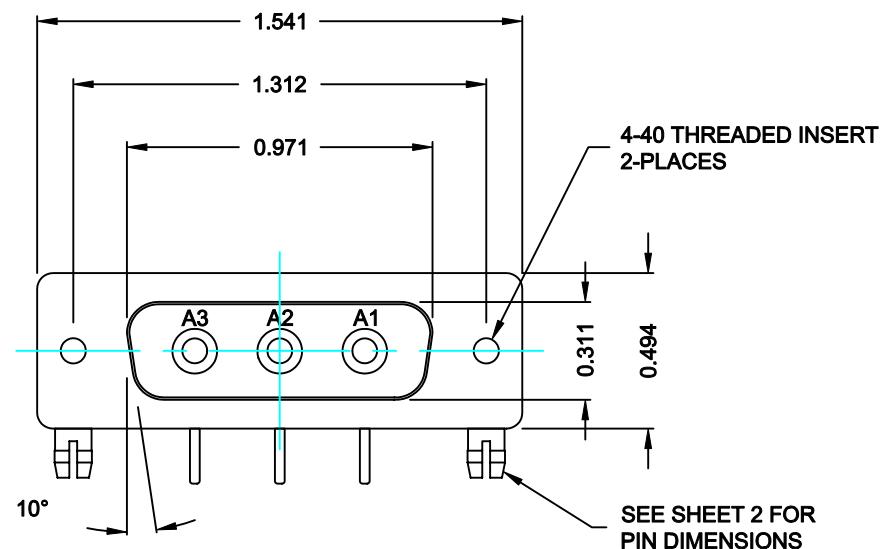

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 MilliOHMS Max.
COAXIAL PINS: 75 OHM

MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:


CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL

FINISH:

SHELL: NICKEL

6853W3203L461

46 = 4-40 INSERTS /
BOARD LOCKS

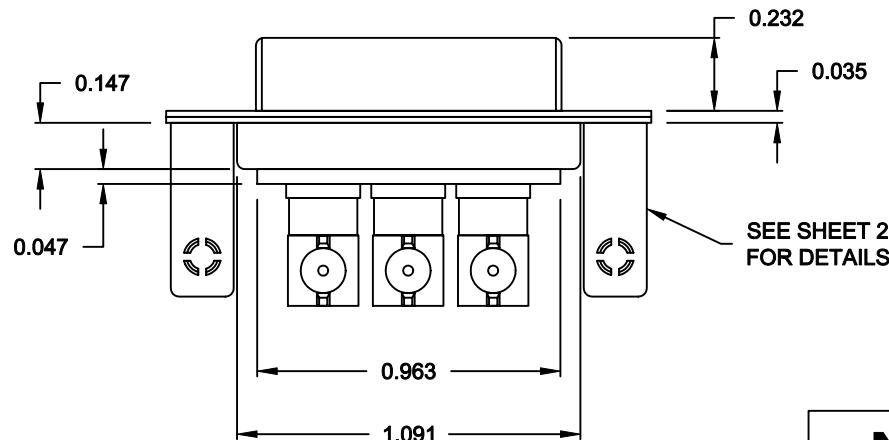

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 10-10-06

CHECKED: X DATE: X

SCALE: N.T.S. SHEET OF 1 2 REV 0



DWG NO.

6853W3203L461

NorComp


DESCRIPTION: 685 SERIES CONTACTS

NOTE:
SIGNAL AND COAXIAL CONTACTS
COME PRE-LOADED INTO INSULATORS

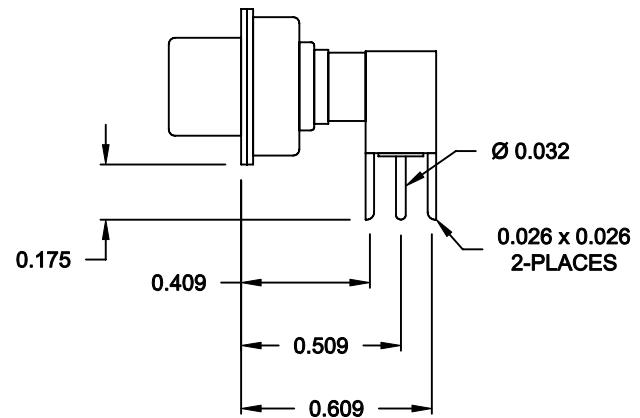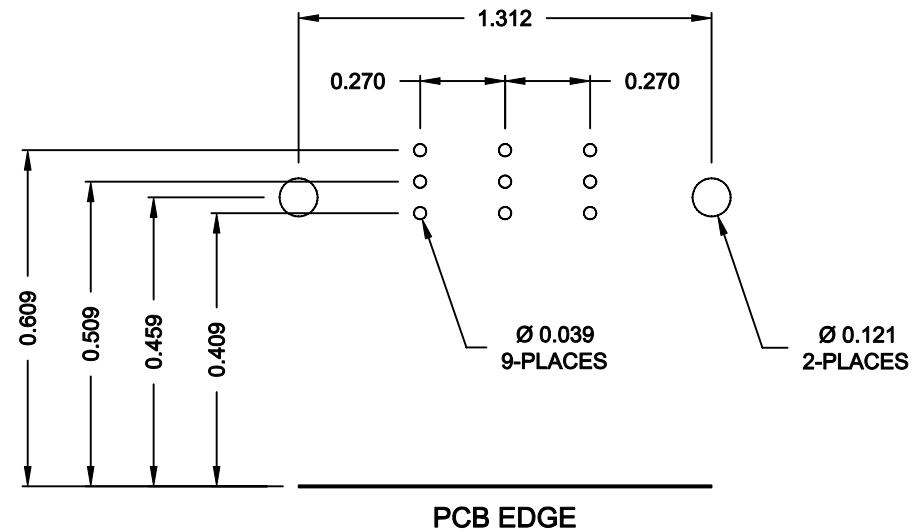

75 OHM COAXIAL CONTACT

RoHS COMPLIANT

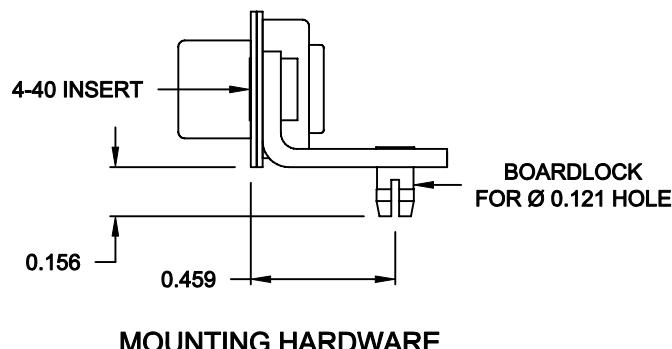

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN:
C. SMITH

DATE:
10-10-06

CHECKED:
X

DATE:
X

SCALE:
N.T.S. SHEET OF
2 2 REV
0

DWG NO.
6853W3203L461

NorComp