


DESCRIPTION: COAXIAL - RIGHT ANGLE - MALE

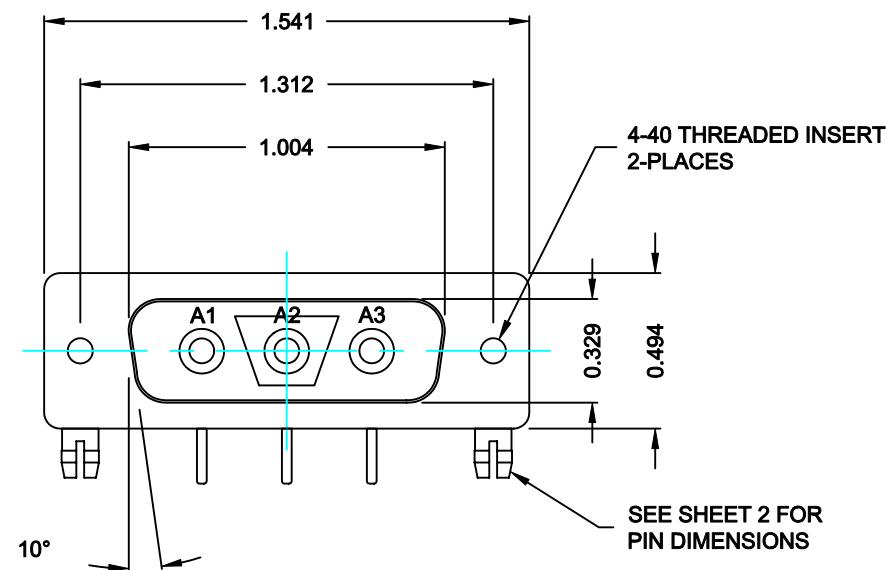

## SPECIFICATIONS:

### ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.  
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.  
OPERATING TEMPERATURE: -55° C ~ +125° C  
CONTACT RESISTANCE: 30 MilliOHMS Max.  
COAXIAL PINS: 75 OHM

### MECHANICAL:

CONTACT INSERTION FORCE: 4.5 Kg Max.  
CONTACT SEPARATOR FORCE: 0.3Kg Min.

### MATERIALS:


CONTACTS: BRASS  
INSULATOR: PBT UL94V-0 RATED,  
230°C PROCESS TEMP.  
SHELL: STEEL

### FINISH:

SHELL: NICKEL

6853W3K103L461

46 = 4-40 INSERTS /  
BOARD LOCKS

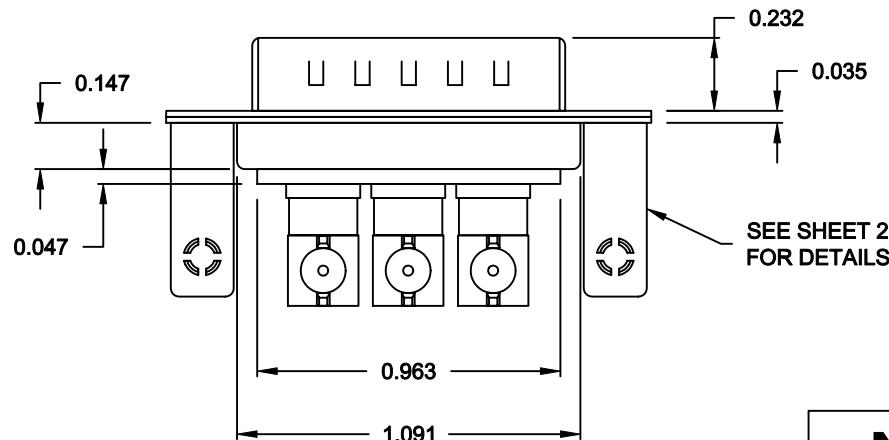

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF NorComp AND  
SHALL NOT BE REPRODUCED, COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OF SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 10-10-06

CHECKED: X DATE: X

SCALE: N.T.S. SHEET OF 1 2 REV 0



DWG NO.

6853W3K103L461

NorComp


DESCRIPTION: 685 SERIES CONTACTS

NOTE:  
SIGNAL AND COAXIAL CONTACTS  
COME PRE-LOADED INTO INSULATORS

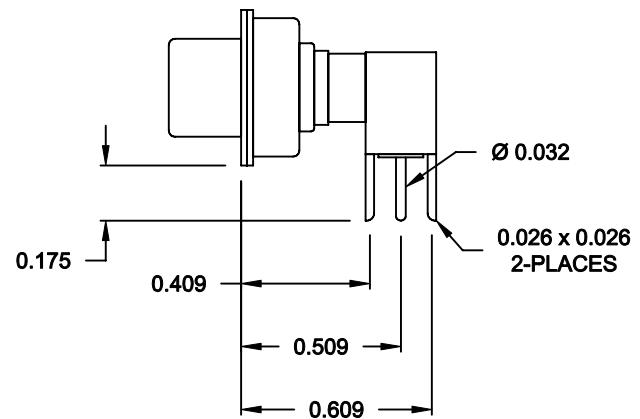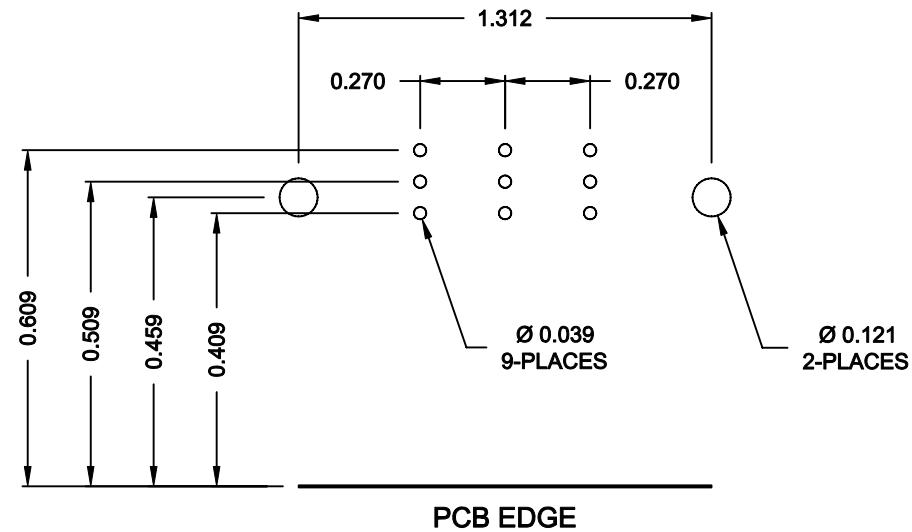

75 OHM COAXIAL CONTACT

RoHS COMPLIANT

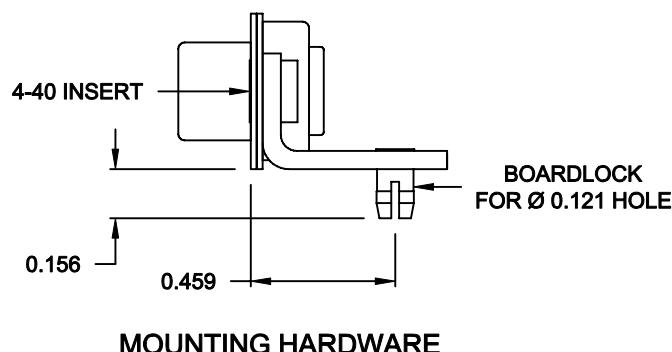

THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF NorComp AND  
SHALL NOT BE REPRODUCED, COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OF SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

DRAWN:  
C. SMITH

DATE:  
10-10-06

CHECKED:  
X

DATE:  
X

SCALE:  
N.T.S. SHEET OF  
2 2 REV  
0

DWG NO.  
6853W3K103L461

NorComp