



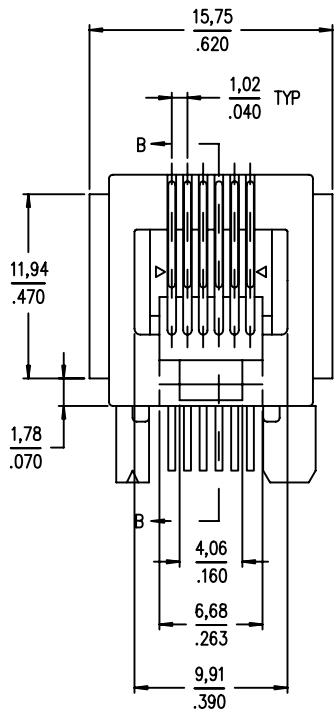



PRODUCT NO.
SEE TABLE





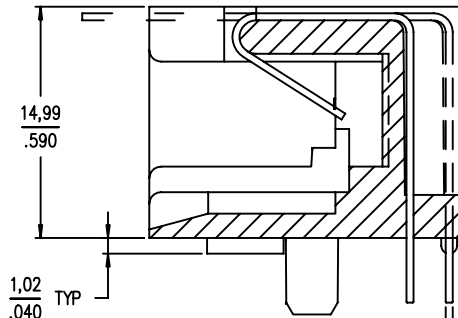









A ——— A

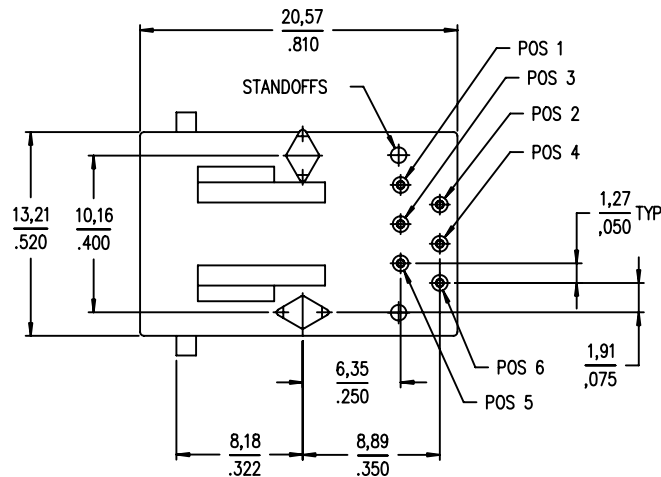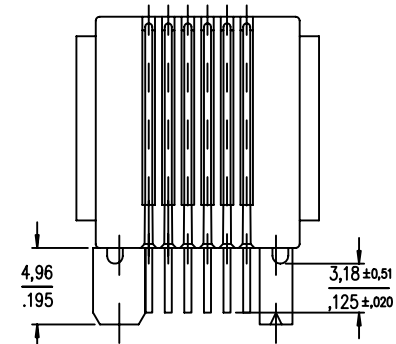



SECTION B-B



mat'l code				tolerance unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com			
rev.	ecn no.	dr	date	linear	XX ± 0.3/XXX ± 0.01			projection	title 6 POS HORIZONTAL P.C.B. MOD JACK ASSY			
M	S80281	BC	L		05/09/98	XX.X ± 0.13/XXX.X ± 0.005						
N	V81245	BOB	M		12/18/98	XXX.X ± 0.005/XXXX.X ± 0.00020						
P	S90087	BC	L		05/19/99	angles ± 2°						
R	S00022	BC	L	01/28/00	dr	JANET	01/26/00	unit	product family		code	
S	N05-0002	YS		01/07/05	engr	TONY CHIEN	01/26/00	mm/inch	size	dwg no.	TWN	
T	N06-0130	LONG		5/15/06	chr	TONY CHIEN	01/26/00	scale	A3	68898	sheet	
U	N08-0097	SH		5/10/08	appd	JENN TSAO	01/26/00	1/1			1 OF 2	
sheet revision		T	T									
index sheet		1	2									

PRODUCT NO. (NOTE 1)	POSITIONS LOADED	CONTACT PLATING	HOUSING COLOR	MOUNTING EARS	REMARKS
68898-001/-001LF	ALL	GXT  TM	BLACK	YES	-
68898-001R/-001RLF	ALL	GXT  TM	RED	YES	-
68898-001G/-001GLF	ALL	GXT  TM	GREEN	YES	-
-002/-002LF	2,3,4,5	GXT  TM	BLACK	YES	-
-003/-003LF	3,4	0,76um /30u" Au	BLACK	YES	-
-004/-004LF	2,3,4,5	0,76um /30u" Au	BLACK	YES	-
-005/-005LF	ALL	0,76um /30u" Au	BLACK	YES	-
-006/-006LF	3,4	GXT  TM	BLACK	YES	-
-007	2,3,4,5	GXT  TM	GRAY	YES	OBSOLETED
-008/-008LF	ALL	0,76um /30u" Au	BLACK	NO	-
-009/-009LF	2,3,4,5	1,27um /50u" Au	BLACK	YES	-
-010/-010LF	ALL	1,27um /50u" Au	BLACK	YES	-
-011/-011LF	2,3,4,5	2u" Au	BLACK	YES	-
-012/-012LF	2,3,4,5	6u" Au	BLACK	YES	-
-013/-013LF	ALL	GXT  TM	BLACK	YES	HI TEMP MATERIAL
-014/-014LF	3,4	6u" Au	BLACK	YES	-
-015/-015LF	3,4	GXT  TM	BLACK	NO	-
-016/-016LF	2,3,4,5	GXT  TM	BLACK	NO	-
-017LF	ALL	GXT  TM	BLACK	YES	-

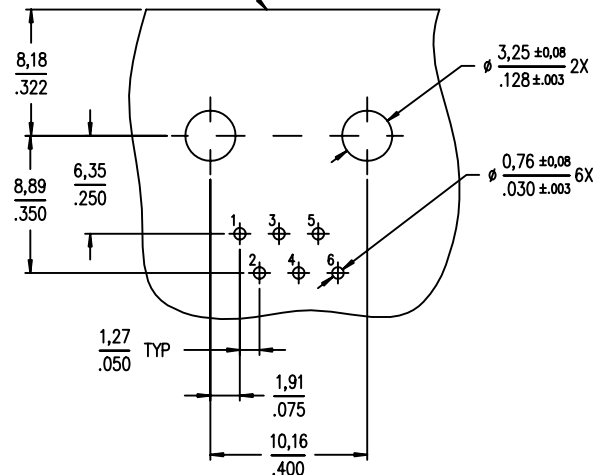


LEAD FREE PRODUCT NO.
EDGE OF BOARD
RECOMMENDED BOARD LAYOUT
VIEWED FROM TOP



VIEW A-A

NOTES :

- WHEN PRODUCT CALLS FOR PACKAGING IN TRAY ORDER THE PRODUCT WITH PART NUMBER 68898-XXXT OR -XXXTLF FOR PACKAGING IDENTIFICATION.
FOR PRODUCT NUMBER WITHOUT SUFFIX "T" OR "TLF", THE PRODUCT WILL BE PACKED IN TUBE AS PER DUPONT STANDARD PACKAGING.
- GXT IS 0,76um / 30u" MIN GXT WITH Au FLASH OVER 1,27um / 50u" MIN Ni.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.60mm MINIMUM THICK CIRCUIT BOARD.
- FOR 68898-013/013LF THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- EQUIVALENT THICKNESS Au AND GXT PLATING HAVE SAME FUNCTION AND THEY ARE ALTERNATIVE BY THE CUSTOEMR .

mat'l code					tolerance unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com			
rev.	ecn	no.	dr	date	linear	X.X ±0.3/X.XX ±0.01		projection 	title 6 POS HORIZONTAL P.C.B. MOD JACK ASSY			
U						X.XX ±0.13/X.XXX ±0.005						
						X.XXX ±0.005/X.XXXX ±0.00020						
					angles	± 2°						
			dr	JANET	01/26/00	unit	product family				code	
			enr	TONY CHIEN	01/26/00	mm/inch	size				dwg no.	TWN
			chr	TONY CHIEN	01/26/00	scale	A3				68898	sheet
			appd	JENN TSAO	01/26/00	1/1						2 OF
sheet	revision											
index	sheet											