

SOLDER TAIL

- 2 - .125
- 5 - .143
- 6 - .180
- 7 - .275


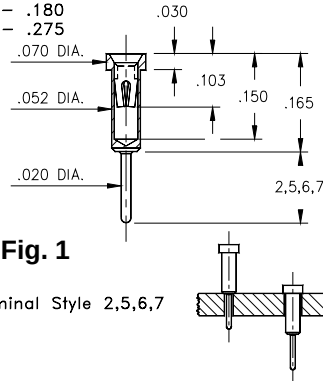


Fig. 1

Terminal Style 2,5,6,7

- Allows for maximum air circulation under the ICs.
- Sockets are XY stack-able.
- Socket pins feature closed-end construction eliminating any solder wicking problems.
- Direct visibility for soldering, inspection and repair.

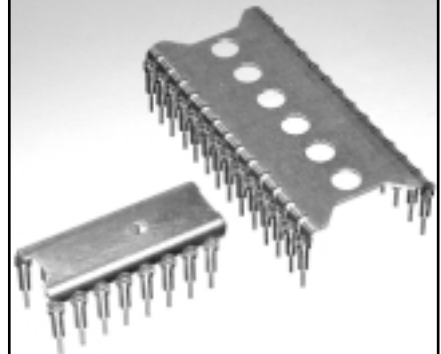

LOW PROFILE

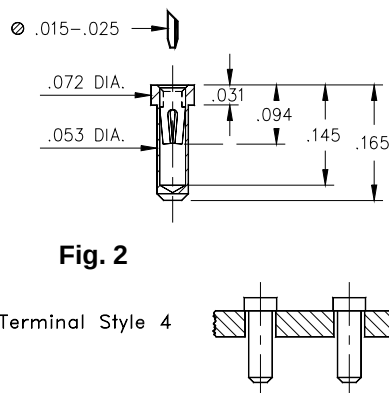


Fig. 2

Terminal Style 4

ULTRA LOW PROFILE

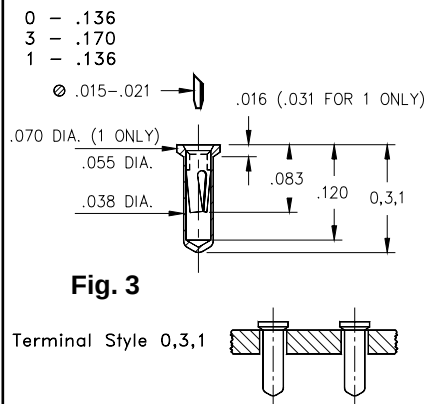


Fig. 3

Terminal Style 0,3,1

REDUCED BARRELL

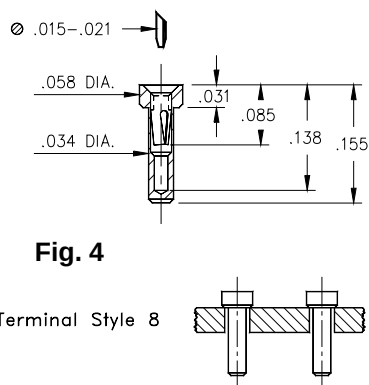


Fig. 4

Terminal Style 8

Total number of pins				Quantity per tube
	A	B	C	
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
24	1.2	0.4	0.5	16
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10

Ordering Information

694-XX-306-00-67Y
694-XX-308-00-67Y
694-XX-314-00-67Y
694-XX-316-00-67Y
694-XX-318-00-67Y
694-XX-320-00-67Y
694-XX-322-00-67Y
694-XX-324-00-67Y

694-XX-424-00-67Y

694-XX-624-00-67Y
694-XX-628-00-67Y
694-XX-632-00-67Y
694-XX-640-00-67Y

Socket Pin Information

	Terminal Length	Body Diameter	Fig. #
Y = 0	.136	.038	3
Y = 1	.136	.038	3
Y = 2	.125	.020	1
Y = 3	.170	.038	3
Y = 4	.165	.053	2
Y = 5	.143	.020	1
Y = 6	.180	.020	1
Y = 7	.275	.020	1
Y = 8	.155	.034	4

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb