


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

() = MOMENTARY







CIRCUIT: DPST

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=± 0.4

X.XX=± 0.25

- TERMINAL NUMBERS FOR REFERENCE ONLY
- CONTACT MATERIAL: GOLD
- RATING: 0.4VA MAX. @ 20 VAC OR VDC MAX.
- ELECTRIC LIFE: 50,000 CYCLES AT FULL LOAD
- INSULATION RESISTANCE: 1,000 MEGA OHM MIN.
- DIELECTRIC STRENGTH: 1,000V RMS @ sea level
- OPERATING TEMPERATURE: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT

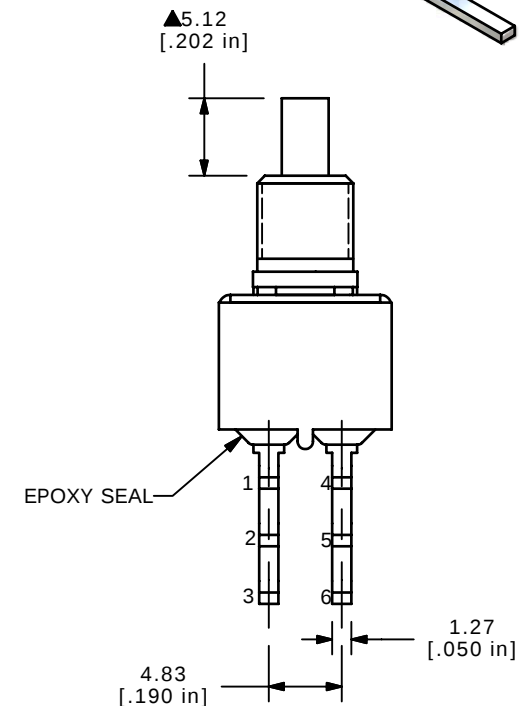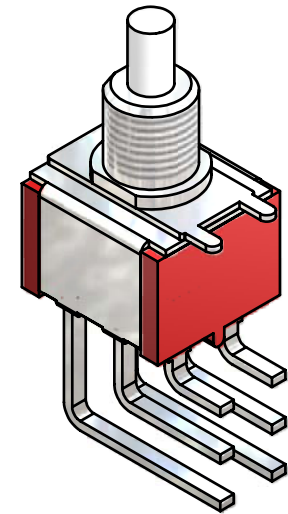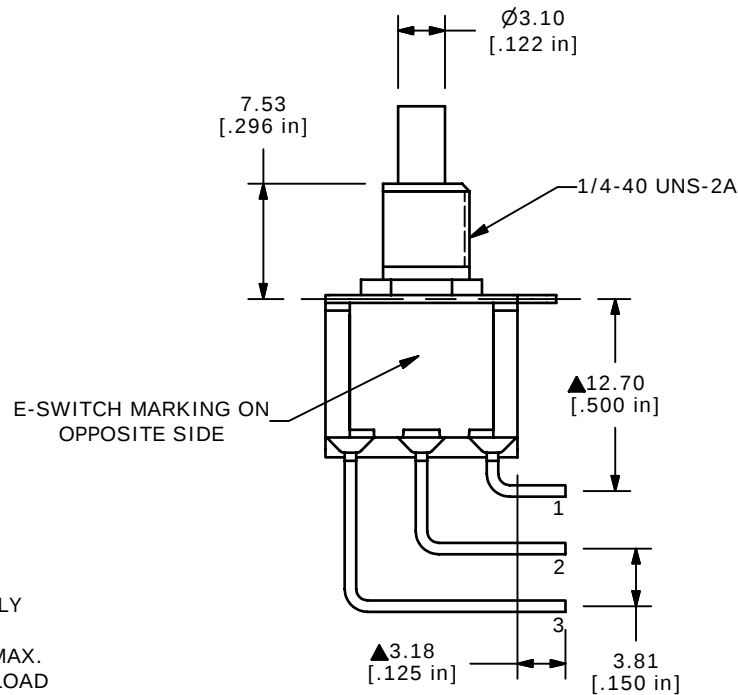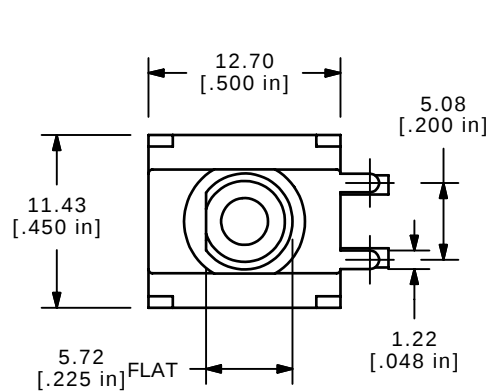

E-SWITCH®

TITLE 700DP7B11M7RE

A	16442	RELEASED FOR PRODUCTION	9/12/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	9/12/2006	BO	T721008	A