

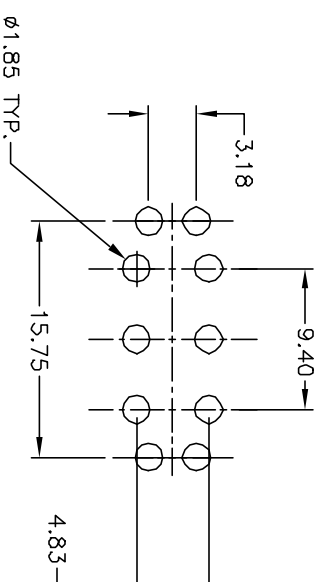


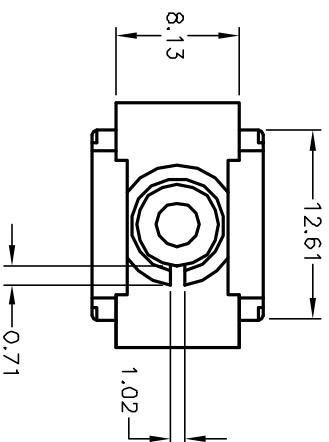

RECOMMEND P.C.B. LAYOUT



CONTACT CONFIGURATION


$\overline{DN}$	$\langle \overline{DN} \rangle$
1-3,4-6	1-2,4-5

$\langle \rangle$ = Momentary

CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0 ± 0.4
 0.00 ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 1A @120VAC or 28VDC
5. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000V RMS @sea level
8. OPERATING TEMP.: -30°C to 85°C

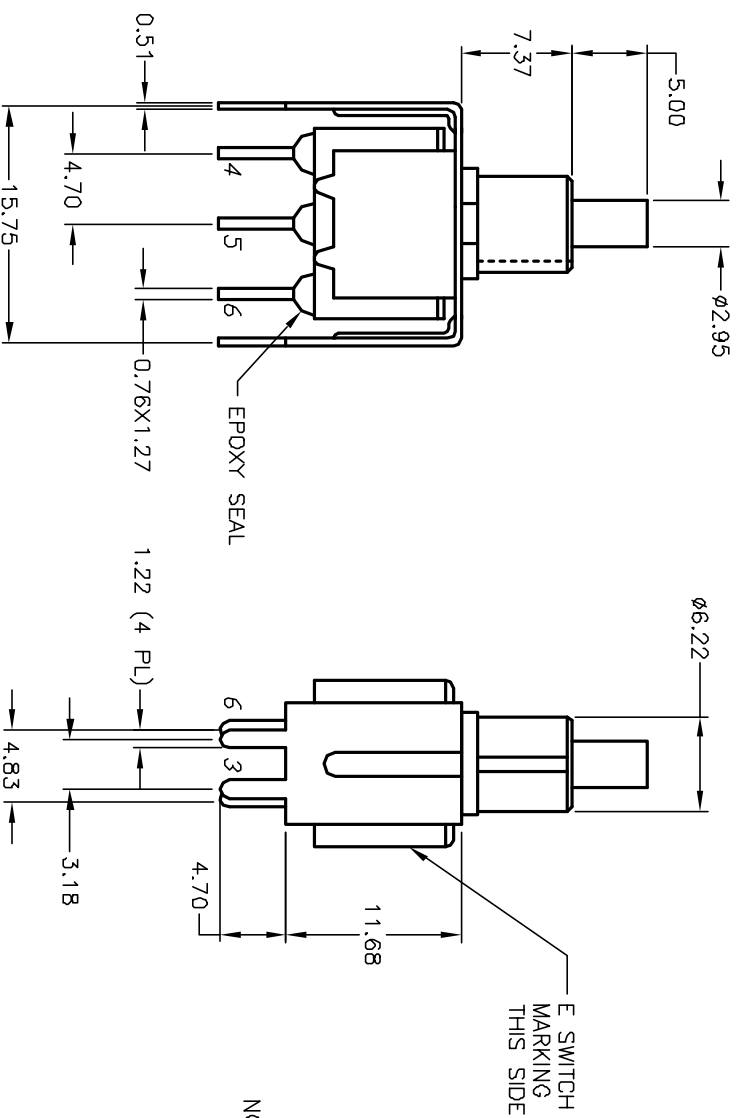**E-SWITCH®**

				E-SWITCH®			
TITLE				700 DP7 B20 VS2 Q E			
SCALE		DATE		DR		DWG	
2:1		8/21/00		PML		T721013	
REV		DATE		CHKD			
A		8/21/00		PML			
REV.		ECN NO.		DESCRIPTION			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							