



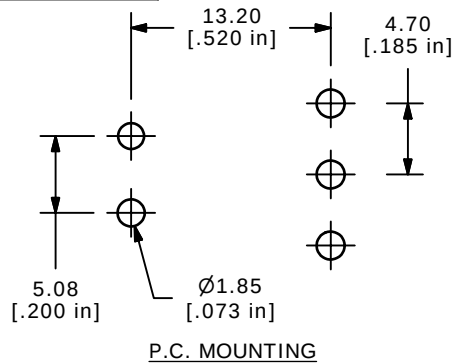



SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2

(ON) = MOMENTARY





NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ CONTACT MATERIAL: GOLD
- RATING: 0.4 VA MAX. @ 20 VAC OR VDC MAX.
- ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

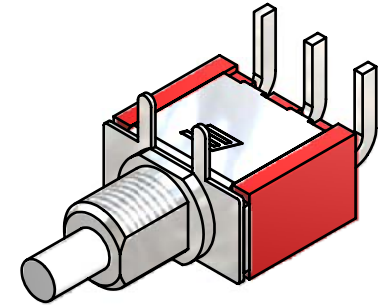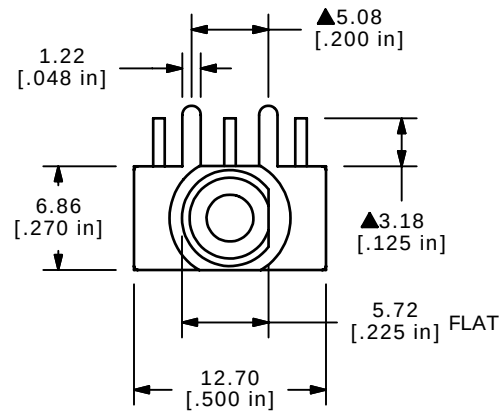

1/4-40 UNS - 2A THREAD

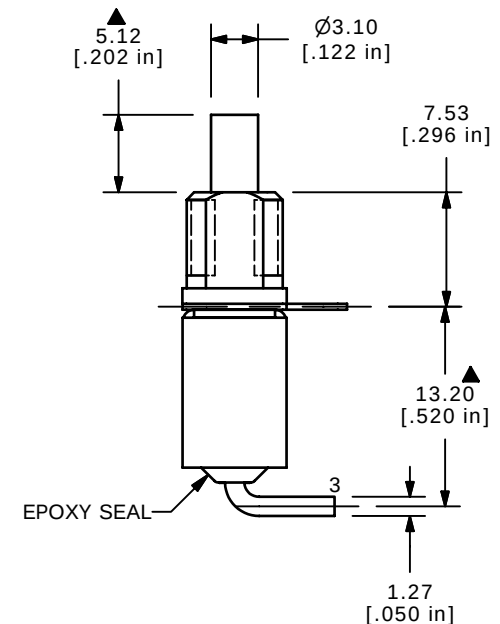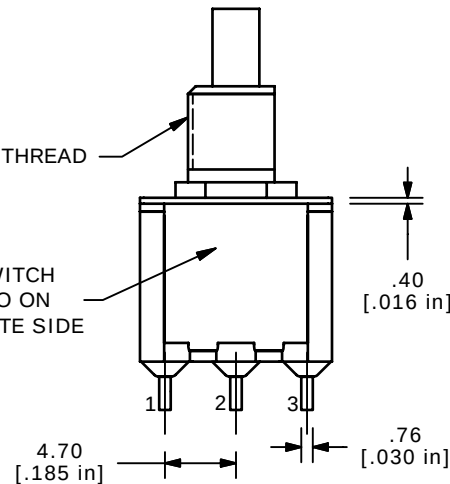E-SWITCH
LOGO ON
OPPOSITE SIDE**E-SWITCH®**

TITLE 700SP7B11M6RE

SCALE
2:1DATE
8/9/2006DR
BODWG
T711066REV
B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	16428	DIM. FROM "4.00" TO "3.18"	9/12/06	BO
A	16291	RELEASED FOR PRODUCTION	8/9/06	BO
REV	PCR NO	DESCRIPTION	DATE	BY