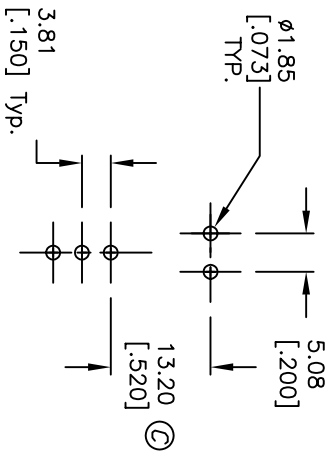


CIRCUIT: SPDT

SWITCH FUNCTION	
DN	(DN)
1-3	1-2

() =MENTARY

1. ALL DIMENSIONS IN MM [INCH]
NOTES: GENERAL TOLERANCE: X.X=±0.4

X.XX=±0.25

3. TERM. NOS. FOR REF. ONLY

4. RATING: 0.4(VA) max. @20V (AC or DC)

5. MATERIAL: FIXED TERMINAL & MOVING CONTACT

Copper Alloy w/GOLD plate over Nickel plate

6. CONTACT RESISTANCE: 10mILLI Ohms max initial

@2-4VDC, 100mA for AG & AU


7. ELECTRICAL LIFE: 50,000 make-and-break

cycles at full load.

8. INSULATION RESISTANCE: 1,000M ohm min.

9. DIELECTRIC STRENGTH: 1000V RMS @sea level

10. OPERATING TEMP.: -30°C to 85°C

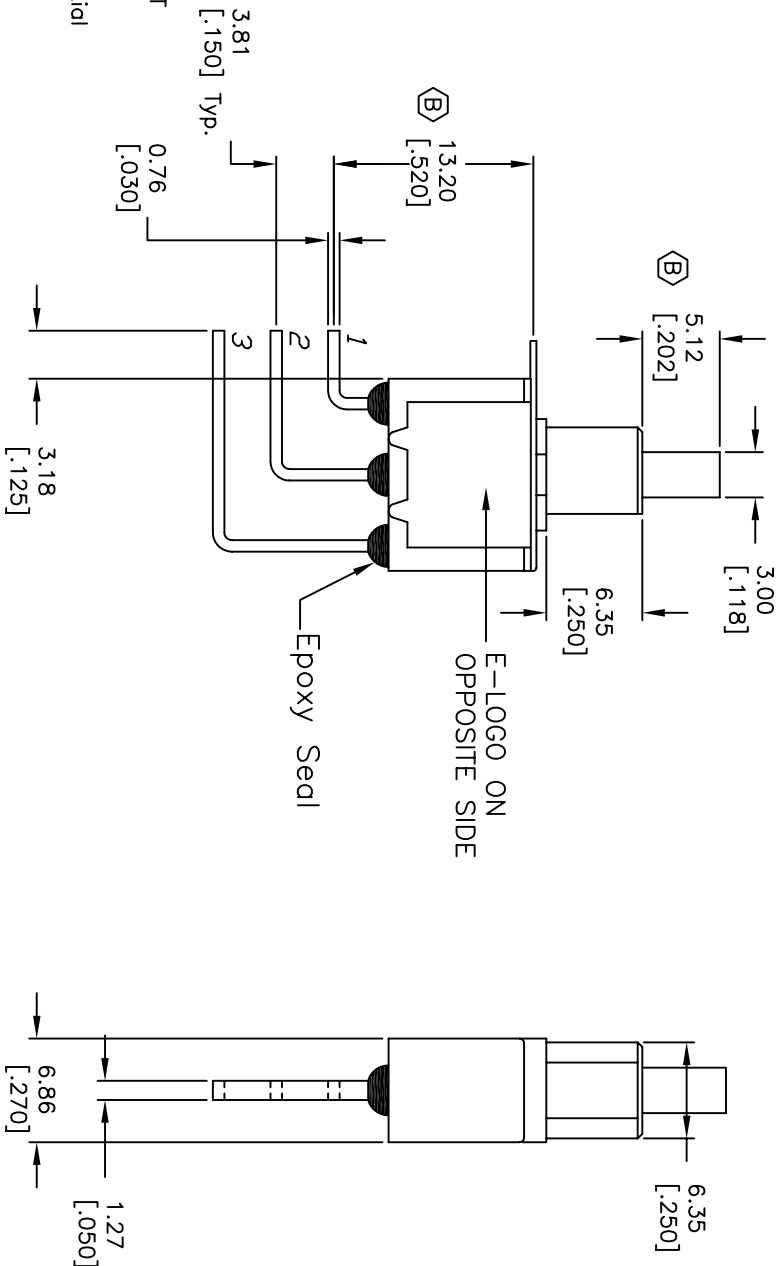

D	15372	CHANGED DIM TO 3.18 FROM 3.81	10/7/05	PH	E-SWITCH® 700 SP-7 B21 M7 RE (GOLD CONTACTS)				
C	15232	CHANGED DIM FROM 12.7 TO 13.2	9/1/05	PH					
B	13971	CHANGE DIMS	4/28/04	AR					
A	12365	REVISED AND REDRAWN	--	--					
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	--	CJB	T711037	D